



docomo **NEXT** series

GALAXY S III

SC-06D

INSTRUCTION MANUAL



Introduction

Thank you for purchasing "SC-06D" mobile terminal. Before and during use of your terminal, be sure to thoroughly read this instruction manual to ensure you are able to correctly use your terminal.

Manual

■ "クイックスタートガイド (Quick start guide)" (included in basic package) (In Japanese only)

Screen view contents and operations of basic function are explained.

■ "Manual" (guide application of the terminal) (In Japanese only)

Detailed guidance of each function and the operations are explained.

- On the application screen of the terminal, Tap "Manual".
For some functions, tap the written contents, and you can see the content or start the function directly from the description.
- For the first time, download and install the application according to onscreen instructions.

■ "INSTRUCTION MANUAL" (PDF file)

Detailed guidance of each function and operations are explained.

- Download from NTT DOCOMO website:
<http://www.nttdocomo.co.jp/english/support/trouble/manual/download/index.html>
- * You can download the updated information of the Quick start guide (in Japanese only). URL and the contents are subject to change without prior notice.

Operation descriptions

In this manual, the operation steps such as the menu operations are simply described as follows.

- "Tap" is an operation of touching lightly the display of the terminal with finger (P.77).

(Example) For tapping  (Applications icon) on the Home screen to display the application menu and then, tapping , the operation is described as follows.


1 From the Home screen, → "Search"

- In this manual, the operation steps and screen images are described in default status. The operation steps or screen image on the terminal may vary by the service you use or application you installed.
- This manual describes in the case of "docomo Palette UI" as the Home application. From the Home screen,  → "Settings" → "Home selection", you can switch home application.
- The images and illustration used in this manual are examples. They may differ from the actual displays.
- In this manual, function or setting that is available in multiple operations are explained mostly with the easily understandable operation steps.
- In this manual, "SC-06D" mobile terminal is usually referred to as "terminal". Please be forewarned.


Accessories/samples and options

■ Basic package


SC-06D
(including the written warranty)

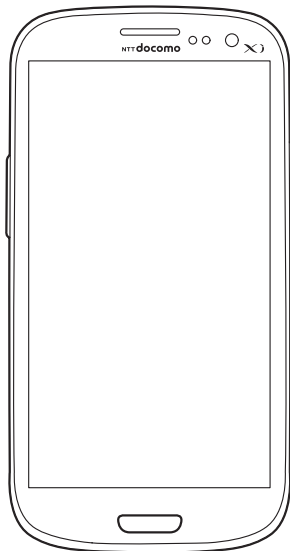


Back Cover SC07

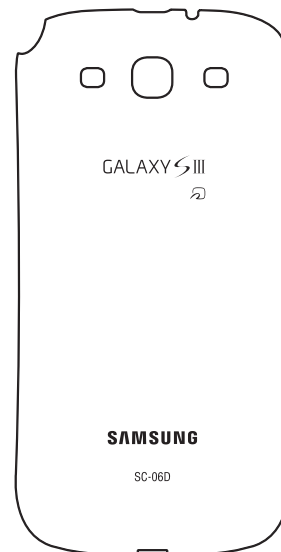


Quick start guide
(Japanese)




Battery Pack SC07

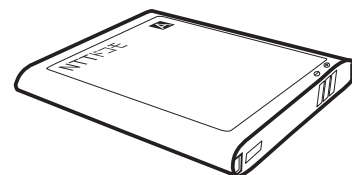

AC Adapter SC04
(With warranty)



USB Cable SC02

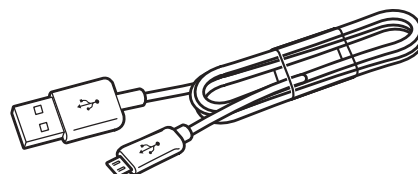


■ Samples

microSD card (2GB)




Stereo Headset with
Microphone

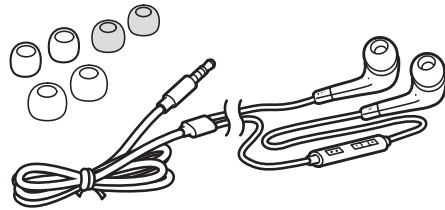

■ Main options

HDMI cable SC03
(with operation
manual)



Other options → P.429

Contents

Assembling	Accessories/samples and options 2
	Contents 4
	About usage of this terminal ... 8
	Safety precautions (Always follow these directions) 11
	Handling precautions..... 39
Getting started	Part names and functions ... 53
	docomo mini UIM card 56
	microSD card..... 59
	Battery pack 63
	Charging 66
	Turning power ON/OFF 73
	Basic Operation 76
	Initial settings 86
	Display and icons 89
	Using Quick search box 97
	Opening a list of recently-used application 99
	Checking/Ending a running application 100
	Entering characters 102
docomo Palette UI	Home screen 126
	Managing Home screen 127
	Application screen 138
	Managing applications 149
	Managing groups..... 150
	Searching applications 152
	Switching Application screen 153
	Installing "Recommends" applications 153
	Home screen information..... 154

Calling	Making a call 155 Receiving a call 160 Operation during a call 164 Call logs 167 Making an international call (WORLD CALL) 172 Call settings 174 Phonebook 185 SD card backup 197
Mail/Web browser	sp-mode mail 198 SMS 199 Email 205 Gmail 217 Early Warning "AreaMail" 219 Talk 221 Web browser 223
Settings	Setting menu 238 Wireless and network 239 Device 260 Personal 276 System 302
File management	My files 309 Bluetooth 311 PC connection 317 AllShare Play 321

Application	dmenu 324 dmarket 325 Play Store 326 Samsung Apps 328 Osaifu-Keitai 329 ToruCa 333 1 Seg 335 Camera 357 Gallery 367 Player 370 GPS/Navigation 382 Clock 389 S Planner 393 S memo 394 Voice recorder 401 Calculator 403 Backing up SD card 404 YouTube 407 Dictionaries 409 Polaris Office 412
International roaming	Overview of international roaming (WORLD WING) 415 Available services 416 Before using the terminal ... 417 Making/Receiving calls in the country you stay 421 Setting for overseas network connection 425 After returning to Japan 428

Appendix/ Index

Introduction of options and related devices	429
Sample accessories	431
Troubleshooting	435
Smartphone Anshin Remote Support	450
Warranty and After-Sales Service	451
Updating software	456
Main specifications	459
Specific Absorption Rate (SAR) of Mobile Phones	465
FCC notice	468
FCC RF exposure information	470
Body-worn operation	471
European RF Exposure Information	472
Declaration of Conformity ..	473
Export Administration Regulations	475
Intellectual Property Right ..	476
Canceling SIM Lock	483
Index	484

About usage of this terminal

- SC-06D supports LTE, W-CDMA, GSM/GPRS, and wireless LAN.
- Because your terminal uses wireless transmission, it may not function in locations where it is difficult for radio waves to penetrate, such as tunnels, underground passages and some buildings, in areas where radio waves are weak, or out of Xi service area and FOMA service area. Even when you are high up in a tall building or condominium and nothing blocks your view outside, your terminal may not be able to receive or transmit signals. Also, communication may be interrupted even when the signal meter on your terminal indicates there are strong radio waves and you are not moving (traveling).
- Because your terminal uses radio waves to communicate, it is possible that a third party may attempt to tap your calls. However, LTE, W-CDMA, GSM/GPRS system automatically applies a confidential communication function to all calls, so even if a third party could somehow tap a call, they only hear noise.
- This terminal encodes voice communication as digital data. When you are operating your terminal while moving to a location subject to weaker radio wave conditions, the transmitted digital data may not be correctly decoded and as a result the decoded voice may differ somewhat from the actual voice.
- This terminal supports Xi Area, FOMA Plus-Area and FOMA HIGH-SPEED Area.

- Note down the information saved in this terminal in a separate note and keep it safely. Note that DOCOMO assumes no responsibility for any loss of saved contents of data resulting from malfunction, repair, changing of the model or other handling of the terminal.
- You are recommended to save important data to microSD card.
- Depending on applications, packet communication charge may apply, even if data communication is disabled.
- As with PCs, some applications that you perform installation may give the terminal instability of the operation, or may send your location information or personal information registered to this terminal to outside via the Internet and the information may be used improperly. Therefore, verify the supplier and operating conditions of the applications before use them.
- This terminal does not support accessing i-mode site (programs) and i-α ppli, etc.
- Only the docomo mini UIM card is available for this terminal. If you have the UIM card or the FOMA card, exchange it for the docomo mini UIM card at the docomo Shop.
- Follow the instruction below to view your phone number. From the Home screen,  → "Settings" → "About device" → "Status"
- This terminal automatically performs communication for some functions, for example, to synchronize data, check the latest software, maintain connection with the server, etc. And when you download applications or watch video etc., a large amount of packet communication charges are executed. Therefore, it is highly recommended to use packet flat-rate service.
- This terminal does not support Public mode (Driving mode).

- In this terminal, sounds (video sound, music shutter sound, etc.) other than ringtone and each notification are not muted even when Silent is set.
- In this terminal, functions may be added or operation steps may be changed due to upgrading Operating System (OS). For latest information of additional function or operation steps, refer to NTT DOCOMO website.
- When OS is upgraded, some applications used for former OS may not work or unintended failure may occur.
- If you lose your terminal, change password of online service accounts from PC for that Google Services such as Google Talk, Gmail, Google Play, and Facebook, etc. should not be used by others.
- The terminal does not support service providers other than sp-mode, mopera U or Business mopera Internet.
- The packet communication charge when tethering may be different depending on your charging plan. We strongly recommend to subscribe to flat-rate service.
- To use tethering, you must subscribe to sp-mode.
- For details, refer to <http://www.nttdocomo.co.jp/english>
- Google applications or services are subject to change without prior notice.
- In case of loss of the terminal, set the screen to ensure the security of the terminal.
- For services provided by Google, thoroughly read the Terms of use of Google Inc. And for other web services, read each terms of use.

Safety precautions (Always follow these directions)

- Before using your terminal, read the precautions below to ensure safe use and handling. After reading this manual, keep it carefully.
- These precautions are intended to protect you and others around you. Read and follow them carefully to avoid injury, damage to the product or damage to property.
- The signs below differentiate between the levels of danger that can occur if the product is not used within the specified guidelines.

 DANGER	This sign denotes that death or serious injury may directly result from improper use.
 WARNING	This sign denotes that death or serious injury may result from improper use.
 CAUTION	This sign denotes that minor injury or damage to property may result from improper use.

■ The symbols below show specific directions.

 Don't	This symbol denotes that the action is prohibited.
 No disassembly	This symbol denotes that disassembling the phone or its components is not allowed.
 No liquids	This symbol denotes that using phone or its components in a bathroom or other highly humid area is not allowed.
 No wet hands	This symbol denotes that using the phone or its components with wet hands is not allowed.
 Do	This symbol denotes that an instruction must be obeyed at all times.
 Unplug	This symbol denotes that the equipment should be unplugged.

■ Precautions contain the description below.

1. Handling the terminal, battery pack, adapter and docomo mini UIM card (common)
..... P.14
2. Handling the terminal P.18
3. Handling battery pack..... P.24
4. Handling adapter P.27
5. Handling docomo mini UIM card..... P.30
6. Handling mobile phones near electronic medical equipment P.31
7. Material list P.33
8. Handling samples (microSD card (2GB)/ Stereo Headset with Microphone)..... P.35

1. Handling the terminal, battery pack, adapter and docomo mini UIM card (common)

DANGER



Do not use, store, or leave the terminal, battery pack, adapter, or docomo mini UIM card in a place subject to high temperature (such as close to fire or heating devices, inside kotatsu, under direct sunlight, or in a car on an extremely hot day). May cause fire, burns or injuries.



Do not put the terminal into heating cooking device such as microwave oven or high-pressure container. May cause fire, burns, injuries, electric shock.



Do not attempt to disassemble or modify the equipment. May cause fires, burns, injuries, electric shock.



Do not let the terminal get wet with water, drinking water, urine of pet animals, etc. May cause fire, burns, injuries, electric shock.



Do

Use the battery pack and adapter specified by NTT DOCOMO for the terminal.

May cause fire, burns, injuries, electric shock.

WARNING



Don't

Do not throw the equipment, or give excessive force or hard shock to it.

May cause fire, burns, injuries, electric shock.



Don't

Keep conductive materials (metal pieces, pencil lead, etc.) from coming in contact with the charging jack or external connection jack. Do not put those materials inside the terminal.

May cause fire, burns, injuries, electric shock.



Don't

Do not cover or wrap the terminal with a blanket, etc. while using or charging.

May cause fire or burns.



Do

Turn the terminal OFF and stop charging before entering a place such as a gas station where flammable gases are generated.

The gas may catch fire.

When using Osaifu-Keitai in a place such as a gas station, turn OFF the terminal before using it. (When Oasifu-Keitai lock is activated, deactivate it before turning OFF the terminal.)



Do

If the equipment starts giving off a strange smell, overheats, becomes discolored or deformed during use, charging or in storage, immediately perform the following operations.

- Remove the power plug from all outlets or cigarette lighter sockets.
- Turn the terminal OFF.
- Remove the battery pack from the terminal.

May cause fire, burns, injuries, electric shock.

CAUTION



Do not leave the equipment on unstable or sloping surfaces.
The terminal may fall and cause injuries.



Do not store the equipment in extremely humid, dusty or hot areas.
May cause fire, burns, electric shock.



Children using the equipment should be instructed in proper operation by an adult. Make sure they are following the instructions when using the terminal.
May cause injuries.



Store the equipment out of reach of small children.
May be accidentally swallowed or cause injuries.



Be careful especially when using the terminal connected to the adapter continuously for a long time.

If you are playing game, watching 1 Seg, etc. while charging the battery for a long time, the terminal, battery pack and adapter may be heated.

Directly touching a hot part for a long time, you may have redness, itching or rash on your skin, or it may result in low-temperature burns depending on your constitution and/or health condition.

2. Handling the terminal

WARNING



Do not lighten the light near eyes.
Especially, when you capture babies or infants, keep the terminal 1m or more away from babies and infants.
Vision disability may result.
Accident may result from being shocked.



Do not put foreign objects such as liquid like water, metal pieces or burnable things into docomo mini UIM card or microSD card slot.
May cause fire, burns, injuries, electric shock.



Do not turn on the light and face the device to drivers.
May disturb driving and cause accident.



Do

Turn the terminal OFF in areas where use is prohibited, such as in airplanes and hospitals.

Failure to do so may cause electronic equipment or electronic medical equipment to fail or malfunction. When using the phone in a medical facility, be sure to observe the regulations of the facility. If you do prohibited act such as using the phone in an airplane, you will be punished according to law. However, if the terminal use is permitted by setting for disconnecting radio wave, etc., follow airline instructions for proper use.



Do

When you talk by setting handsfree or ring alert is sounding, keep the terminal away from your ear.

And, when connecting the earphone/microphone, etc. to the terminal and play a game or music, etc. adjust the volume moderately.

Too loud volume may cause a hearing loss. And, if you cannot hear the sound around you clearly, it may cause an accident.



Do

If you have weak heart, be careful when setting the vibrate alert (vibration) or alert volume setting.

May cause harmful effect on heart.



Do

When you use electronic medical equipment, check with the equipment manufacturer to determine how the device is affected by radio waves before using.

May cause harmful effect on electronic medical equipment etc.



Do

Turn the terminal OFF near high-precision electronic control equipment or electronic equipment using low-power signals.

Failure to do so may cause the equipment to fail or malfunction.

* Examples of electronic equipment to avoid

Hearing aids, implanted pacemakers or defibrillators, other electronic medical equipment, fire alarms, automatic doors and other automatic control equipment. Users wearing implanted pacemakers or defibrillators or other electronic medical equipment should check with the manufacturer or sales outlet about the effect of radio frequencies on the equipment.



Do

When the display or camera lens is accidentally broken, be careful of broken glass or exposed internal parts of the terminal.

Inside of display is made of impact-resistant resin and surface of camera lens is made of acrylic parts, and they are structured for the glass not to scatter, however, if you mistakenly touch broken or exposed parts, you may be injured.

CAUTION



Do not use damaged terminal.

May cause fire, burns, injuries, electric shock.



Before using the motion sensor, be sure to check safety around you, firmly grip your terminal and do not swing it more than necessary.

May cause injury or other accidents.



If the display part is accidentally broken and liquid crystal leaks out, do not make the material contact with your skin of face or hands.

May cause loss of sight or skin problems. If the material gets into your eyes or mouth, rinse it with clean water and go to a doctor immediately. And, if the material adheres to skin or clothing, use alcohol etc. to wipe it off, and then wash with soap.



To use the terminal in car, check with automobile manufacturer or dealer to determine how the device is affected by radio waves before using.

In rare cases, using the phone in some vehicle models can cause the vehicle's electronic equipment to malfunction. In that case, stop using the terminal immediately.



Do

Mobile phones can give some users skin problems such as itching, allergic reactions or rashes. If you develop skin problems, stop using the phone immediately, and see a doctor. For parts materials → P.33 "Material list"



Do

When watching the display, take a certain distance from the display in a fully bright place.
May reduce visual acuity.

3. Handling battery pack

- Check that the battery type matches the type displayed on the battery pack label.

Display	Battery type
Li-ion 00	Li-ion battery

DANGER



Do not contact a wire or other metal objects to the jack. And, do not carry or store the terminal with objects like a metal necklace.

May cause battery pack to ignite, burst, heat or leak.



Check the orientation of battery pack to install it to the terminal, and do not try to force the battery pack onto the terminal if you are having trouble installing it.

May cause battery pack to ignite, burst, heat or leak.



Do not throw the battery pack into the fire.

May cause battery pack to ignite, burst, heat or leak.



Do not nail the battery pack, hit with a hammer or step on it.

May cause battery pack to ignite, burst, heat or leak.



If the battery pack's fluid etc. contacts eyes, immediately flush the eyes with clean water and see a doctor right away. Do not rub the eyes.

May cause loss of sight.

WARNING



If the battery pack seems to have abnormalities such as deformation or scratches due to falling, never use it.

May cause battery pack to ignite, burst, heat or leak.



If the battery pack leaks or gives off a strange smell, immediately remove it from the vicinity of open flames.

The vapors from leaking battery pack fluid may ignite or explode.



Be careful not to let your pet bite the battery pack.

May cause battery pack to ignite, burst, heat or leak.

CAUTION



Do not discard old battery packs together with other garbage.

May cause igniting or environmental destruction. Tape the terminals of old battery packs to insulate them, and then bring them into a sales outlet such as docomo Shop. If your local municipality has a battery recycling program, dispose of them as provided for.



Do not use or charge a wet battery pack.

May cause battery pack to ignite, burst, heat or leak.



If fluid leaks out from battery pack, do not make the fluid etc. contact with your skin or face or hands.

May cause loss of sight or skin problems. If the fluid etc. put into your eyes or mouth, or contacts skin or clothes, immediately flush the contacted area with clean water. If the fluid put into the eyes or mouth, immediately see a doctor after flushing.

4. Handling adapter

WARNING

 **Do not use the adapter cord if it gets damaged.**
Don't May cause fire, burns, electric shock.

 **Do not use the AC adapter in a bathroom or other highly humid area.**
Don't May cause fire, burns, electric shock.

 **Always use the DC adapter with a negative-ground vehicle. Do not plug it into a positive-ground vehicle.**
Don't May cause fire, burns, electric shock.

 **When it starts to thunder, do not touch adapter.**
Don't May cause electric shock.

 **Do not short the charging jack while it is connected to the outlet or cigarette lighter socket. Do not touch the charging jack with a part of your body such as your hand or finger.**
Don't May cause fire, burns, electric shock.

 **Do not place heavy objects on the adapter cord.**
Don't May cause fire, burns, electric shock.



When you insert and remove AC adapter from power outlet, do not contact a metal strap or other metal objects with the jack.

May cause fire, burns, electric shock.



No wet hands

Do not touch the adapter cord or outlet with wet hands.

May cause fire, burns, electric shock.



Do

Only use with the specified power source and voltage. Also, charge with AC adapters usable overseas when charging overseas.

If incorrect voltage is used, this may cause fire, burns or electric shock.

AC adapter : AC 100 V

DC adapter : DC 12 V, 24 V (for negative grounds)

AC adapters usable overseas : AC 100 V - 240 V (plug into household AC outlets only)



Do

If the DC adapter's fuse blows, replace it only with the specified fuse.

May cause fire, burns, electric shock. For the specified fuse, see the instructions that come with the DC adapter.



Do

Wipe off any dust that accumulates on the power plug.

May cause fire, burns, electric shock.



Do

When you connect the AC adapter to an outlet, do not fail to properly connect to the outlet.

May cause fire, burns, electric shock.



Do

When you disconnect the power plug from the outlet or cigarette lighter socket, do not pull the adapter cord with excessive force. Instead, hold the adapter to disconnect.

May cause fire, burns, electric shock.



Unplug

Always remove the power plug from the outlet or cigarette lighter when not using the adapter for an extended period.

May cause fire, burns, electric shock.



Unplug

Immediately remove the power plug from the outlet or cigarette lighter socket if water or other fluids get into the adapter.

May cause fire, burns, electric shock.



Unplug

Always remove the power plug from the outlet or cigarette lighter socket when cleaning the equipment.

May cause fire, burns, electric shock.

5. Handling docomo mini UIM card

CAUTION



Do

Be careful of the cut surface when removing docomo mini UIM card.
May cause injuries.

6. Handling mobile phones near electronic medical equipment

- These precautions are based on the guidelines produced at the Electromagnetic Compatibility Conference Japan, regarding the protection of electronic medical equipment from radio waves emitted by mobile phone units.

WARNING



Do

Obey the following rules inside medical facilities.

- Do not bring the terminal into operating rooms, intensive care units (ICUs) or coronary care units (CCUs).
- Turn the terminal OFF in hospital wards.
- Turn the terminal OFF in hospital lobbies and corridors if electronic medical equipment could be nearby.
- If the medical facility has specified zones where use or possession of mobile devices is prohibited, obey those instructions.



Do

Turn the terminal OFF in crowded trains or other public places where pacemaker or defibrillator wearers could be nearby.

The terminal's signals may affect the operation of implanted pacemakers or defibrillators, and other devices.



Do

Wearers of the electronic medical equipment such as implanted pacemakers or defibrillators must carry and use the terminal at least 22 cm away from the implanted device.

The terminal's signals may affect the operation of the electronic medical equipment.



Do

When electronic medical equipment other than implanted pacemakers or defibrillators are in use outside of medical facilities (such as in home care settings), check with the device manufacturer to determine how the device is affected by electrical signals.

The terminal's signals may affect the performance of electronic medical equipment.

7. Material list

Part		Material	Surface treatment
Display panel		Glass	—
External case (Periphery)	Front side	PC	Tin deposition
	Back cover (Pebble Blue)	PC	Multi deposition
	Back cover (Marble White)	PC	Multi deposition
Side key (Volume key, Power/screen lock key)		PC	Tin deposition
Home key		Aluminum CNC processing	Anodized aluminum
Camera lens panel		Glass	—
Camera lens peripheral part		PC	Tin deposition
Top part of 1 Seg antenna (Pebble Blue)		PC	Multi deposition

Part		Material	Surface treatment
Top part of 1 Seg antenna (Marble White)		PC	Multi deposition
Light Panel		Acrylate	—
Speaker		Stainless steel	—
Earpiece peripheral part		Stainless steel	Chrome plating
Battery Pack	Contacts	Copper alloy	Nickel base plating/ Gold plating
	Battery pack	PC	—
	Label	PET	Coating (UV mat organic PV)

8. Handling samples (microSD card (2GB), Stereo Headset with Microphone)

DANGER

■ microSD card (2GB)/Stereo Headset with Microphone (Common)



Do not put the equipment into heating cooking device such as microwave oven or high-pressure container.
May cause fire, burns, injuries, electric shock.

■ Stereo Headset with Microphone



Do not use, store or leave the equipment in hot places (e.g. by the fire, near a heater, under a kotatsu, in direct sunlight, in a car in the hot sun).
May cause fire, burns or injuries.



No
disassembly

Do not disassemble or remodel the equipment.

May cause fire, burns, injuries, electric shock.



No
liquids

Do not let the equipment get wet with water, drinking water, urine of pet animals, etc.

May cause fire, burns, injuries, electric shock.

WARNING

■ microSD card (2GB)/Stereo Headset with Microphone (Common)

-  **Do not throw the equipment or give a strong force or hard shock to it.**
Don't May cause fire, burns, injuries, electric shock.

■ Stereo Headset with Microphone

-  **Keep conductive materials (metal pieces, pencil lead, etc.) from coming in contact with the jack. Do not put those materials inside the equipment.**
Don't May cause fire, burns, injuries, electric shock.

-
-  **Do not use Stereo Headset with Microphone while driving a car etc.**
Don't May cause accident.
-

-  **During walking, do not raise the volume of Stereo Headset with Microphone to a level that ambient sound cannot be heard. Be careful about surrounding traffic or road surface condition.**
Don't May cause accident.

CAUTION

■ microSD card (2GB)/Stereo Headset with Microphone (Common)

 **Do not store the equipment in extremely humid, dusty or hot areas.**
Don't May cause fire, burns, electric shock.

 **Children using the equipment should be instructed in proper operation by an adult. Do not allow them to use the equipment without adult supervision.**
Do May cause injuries.

 **Store the equipment out of reach of small children.**
Do May be accidentally swallowed or cause injuries.

■ microSD card (2GB)

 **Do not use, store or leave the microSD card in hot places (e.g. by the fire, near a heater, under a kotatsu, in direct sunlight, in a car in the hot sun).**
Don't May cause deformation of equipment, data loss or malfunction.

 **Do not bend microSD card or place heavy objects on it.**
Don't May cause malfunction.



Do not touch to the metal contact with conductive materials (metal pieces, pencil lead, etc.) or short.
May cause data loss or malfunction.



Do not give vibration/shock, turn the terminal off or remove from the equipment while writing/reading data to/from the microSD card.
May cause data loss or malfunction.



Do not disassemble or remodel the equipment.
May cause data loss or malfunction.



Do not let the microSD card get wet with water, drinking water, urine of pet animals, etc.
May cause fire, burns, injuries, electric shock.

■ Stereo Headset with Microphone



Do not swing the terminal by the cord of Stereo Headset with Microphone.
May cause accident such as injury to yourself or others by hitting or removing the cord, malfunction or damage.



Take care with the volume when you use Stereo Headset with Microphone.
May cause hearing loss by long-time use or hurt of your ears by sudden loud sound.

Handling precautions

General

■ Do not expose to water.

The terminal, battery pack, adapter and docomo mini UIM card are not waterproof. Do not use them in a humid place such as bathroom or in the rain. If you carry your terminal on your body, perspiration may corrode the internal parts of the terminal and cause malfunction. Note that if a trouble is diagnosed as exposure to water or other liquid, repairs of the terminal may not be covered by the Warranty or it may not be possible to repair such phones. In that case, even if the terminal can be repaired, it is repaired at the owner's expense.

■ Clean the terminal with a dry soft cloth (such as used for cleaning eyeglasses).

- Rubbing it roughly with a dry cloth may scratch the display.
- Drops of water or dirt left on the display may cause stains.
- Do not use alcohol, thinner, benzene, cleaning detergent, etc. to clean the terminal. These chemicals may erase the printing on the terminal or cause discoloration.

■ **Clean the jacks occasionally with a dry cotton swab.**

If the jack is soiled, connection gets worse and it may cause power to be turned off or insufficient battery charge, so clean the jack with a dry cotton swab etc. When cleaning, be careful not to damage the terminals.

■ **Do not leave the terminal near the air conditioning vent.**

Extreme temperature changes may produce condensation and corrode the internal parts of the terminal, causing it to malfunction.

■ **Make sure to use the terminal or battery pack without excessive force.**

If you put the terminal in a bag full of items or sit down with the terminal in the pocket of your clothes, it may damage the display, and internal circuit board, and the battery pack and cause the terminal to malfunction.

Also, while the external device is connected to the external connection jack or the headphone connection jack, it may damage the connector and cause malfunction.

■ **Do not rub or scratch the display with metal.**

The display may get scratched and it may cause malfunction or damage.

■ **Make sure to see the user's manuals supplied with the optional accessories.**

Terminal precautions

- **Do not press display surface forcibly, or not operate with a sharp-pointed objects such as nail, ballpoint pen, pin, etc.**

Doing so may cause damage of display.

- **Do not use the terminal in extremely hot or cold places.**

Use the terminal within a temperature range of 5°C to 35°C and a humidity range of 45% to 85%.

- **The terminal may affect land-line phones, TVs or radios in use nearby, so use it as far as possible from these appliances.**

- **Note down the information saved in your terminal in a separate note and keep it safely.**

Note that DOCOMO assumes no responsibility for any loss of saved contents of data.

- **Do not drop or give a strong impact to the terminal.**

Doing so may cause malfunction or damage.

- **Do not plug the connector of the external device or the headphone connection jack into the external connection jack at the slant and pull it while connecting.**

Doing so may cause malfunction or damage.

- **The terminal could become warm while in use and charging. This condition is not abnormal. You can continue to use the terminal.**
- **Do not leave the camera under direct sunlight.**
Doing so may cause discoloring or burn-in of materials.
- **Do not use the terminal without the back cover.**
It may cause the battery pack to come off, or may cause a malfunction or damage.
- **While microSD card is being used, do not take the card out and do not turn off the terminal.**
Doing so may cause data loss or malfunction.
- **Do not let magnetic cards, etc. come close to the terminal.**
The magnetic data in cash cards, credit cards, telephone cards, floppy disks, etc. may be erased.
- **Do not bring strong magnetic objects close to the terminal.**
Bringing strong magnetism close may cause malfunction.
- **Do not decorate or paint the terminal.**
May cause malfunction.

Battery pack precautions

- **The battery pack is a consumable accessory.**

Replace the battery pack if the terminal has extremely short operation time on a full charge, though it may vary by operating conditions. Purchase the specified battery pack.

- **Charge the battery pack in an environment with the proper ambient temperature (5°C to 35°C).**
- **The operating time of the battery pack varies depending on the operating environment and the secular degradation of the battery pack.**
- **Depending on the use condition, the battery pack may be inflated as it comes to the end of its life. This is not a malfunction.**
- **Be careful especially about the following points when preserving the battery pack.**
 - Keeping under the state of the full charge (right after the charging ends)
 - Keeping under the state of empty charge (too exhausted to turn on the terminal)

The performance and life of the battery pack may deteriorate.
It is recommended that you store the battery pack with about 40% battery remained.

Adapter Precautions


- Charge the battery pack in an environment with the proper ambient temperature (5°C to 35°C).
- Do not charge in the following places.
 - Places that is very humid, dusty or exposed to strong vibrations.
 - Near ordinary phone or TV/radio.
- The adapter could become warm while charging. This condition is not abnormal. You can continue charging the battery.
- When using the DC adapter for charging, keep the vehicle engine running.
The vehicle's battery could become flat.
- When using an outlet with a mechanism preventing unplugging, follow the handling instructions for that outlet.
- Do not give a strong impact to the adapter. Also, do not deform the charging jack.
Doing so may cause malfunction.

docomo mini UIM card precautions

- **Do not use excessive force to attach/remove docomo mini UIM card.**
- **Note that DOCOMO assumes no responsibility for malfunctions occurring as the result of inserting and using a docomo mini UIM card with another IC card reader/writer.**
- **Always keep the IC portion clean when you use the card.**
- **Clean docomo mini UIM card with a soft, dry cloth (such as a cloth for eyeglasses).**
- **Maintain a separate record of the data you saved in docomo mini UIM card.**
Note that DOCOMO assumes no responsibility for any loss of saved contents of data.
- **To preserve the environment, bring the old docomo mini UIM card to a sales outlet such as docomo shop.**
- **Do not carelessly damage, contact, or short-circuit an IC.**
Doing so may cause data loss or malfunction.
- **Do not drop docomo mini UIM card or subject it to shocks.**
Doing so may cause malfunction.
- **Do not bend docomo mini UIM card or place heavy objects on it.**
Doing so may cause malfunction.
- **Do not attach docomo mini UIM card to the terminal with a label or sticker put on docomo mini UIM card.**
Doing so may cause malfunction.

Bluetooth function precautions

- To secure the Bluetooth communication security, this terminal supports the security function compliant with Bluetooth standards, but the security may not be sufficient depending on the settings. Be aware of the communication using the Bluetooth function.
- Note that DOCOMO is not responsible for data or information leak when making data communications using Bluetooth.
- Frequency band
The frequency band used by this terminal's Bluetooth function is indicated on the battery storage section. The following are the descriptions:



- 2.4 : This radio equipment uses the 2400 MHz band.
- FH/DS/OF : Modulation scheme is FH-SS, DS-SS, or OFDM system.
- 1 : The estimated interference distance is 10 m or less.
- 4 : The estimated interference distance is 40 m or less.
-  : The full band between 2400 MHz and 2483.5 MHz is used and the band of the mobile identification device is unavoidable.

Available channels vary by the country.
For use in an aircraft, contact the airline
beforehand.

■ Bluetooth cautions

The operating frequency band of this terminal is used by industrial, scientific, consumer and medical equipment including microwave ovens, premises radio stations for identifying mobile units used in the manufacturing lines of plants (radio stations requiring a license), specified low power radio stations (radio stations requiring no license) and amateur radio stations (hereinafter referred to as "another station").

1. Before using this terminal, confirm that "another station" is not being operated nearby.
2. In the event of this terminal causing harmful radio wave interference with "another station", promptly change the operating frequency or stop radio wave emission by turning off the power, etc.
3. If you have further questions, contact docomo Information Center provided on the last page of this manual.

Wireless LAN (WLAN) precautions

- Wireless LAN uses radio waves to enable communications between compatible devices, thus allowing connection to a local area network from anywhere within range. On the other hand, there is a risk of data interception by malicious third party unless security is established. It is recommended to set the security settings on your own responsibility.
- Wireless LAN
 - Do not use wireless LAN near magnetic devices such as electrical appliances or AV/OA devices, or in radio waves.
 - Magnetism or radio waves may increase noises or disable communications (especially when using a microwave oven).
 - When used near TV, radio, etc., reception interference may occur, or channels on the TV screen may be disturbed.
 - If there are multiple wireless LAN access points nearby and the same channel is used, search may not work correctly.
 - For using WLAN overseas, point of use etc. may be restricted depending on country. In that case, confirm conditions such as available frequency or regulations of the country to use it.

■ 2.4 GHz device cautions

The operating frequency band of the WLAN device is used by home electric appliances such as microwave oven, industrial, scientific, consumer and medical equipment including premises radio stations for identifying mobile units used in the manufacturing lines of plants (radio stations requiring a license), specified low power radio stations (radio stations requiring no license) and amateur radio stations (radio stations requiring a license).

1. Before using the device, confirm that premises radio stations for identifying mobile units, specified low power radio stations and amateur radio stations are not being operated nearby.
2. If the device causes harmful radio interference to premises radio stations for identifying mobile units, immediately change the frequency band or stop use, and contact docomo Information Center described on the last page of this manual for crosstalk avoidance, etc. (e.g. partition setup).
3. If the device causes radio interference to specified low power radio stations or amateur radio stations, contact docomo Information Center described on the last page of this manual.

■ 5 GHz band channel using for this terminal

This terminal can use 3 channels of W52, W53 and W56 on 5 GHz frequency band.

- W52 and W53 are prohibited to use outdoor by Radio Law.

Precautions on FeliCa reader/writer function

- FeliCa reader/writer function of the terminal uses weak waves requiring no licenses for radio stations.
- It uses 13.56 MHz frequency band. When using other reader/writers in your surroundings, keep the terminal away sufficiently from them. Before using the FeliCa reader/writer, confirm that there are no radio stations using the same frequency band nearby.

Notes on samples (microSD card (2GB), Stereo Headset with Microphone)

- microSD card (2GB)/Stereo Headset with Microphone (Common)
- **Do not expose to water.** microSD card and Stereo Headset with Microphone are not waterproof. Do not use in a bathroom or other highly humid area or do not let rain touch. Or putting the terminal on your body, humidity of sweat may cause internal corrosion and malfunction.

- **Clean the jack occasionally with a dry cotton swab etc.**

If the jack is soiled, connection gets worse and it may cause power to be turned off or insufficient battery charge, so clean the jack with a dry cotton swab etc. Also, be careful never to damage the jack when cleaning it.

- **Do not place the equipment near an air-conditioner outlet.**

The rapid change in temperature may cause condensation, causing internal corrosion and malfunction.

■ **Stereo Headset with Microphone**

- **To remove Stereo Headset with Microphone from the terminal, be sure to hold the plug of Stereo Headset with Microphone and then pull out horizontally from the terminal.**

If you pull out forcibly, it may cause malfunction.

Note

- **Do not deform the terminal. Using an altered device is a violation of the Radio Law.**

A "Technical Compliance Mark"  affixed on the manufacturer's specification sticker certifies that the terminal meets technical regulations for specified radio equipment that are based on the Radio Law.

If you remove the screws and alter the inside of the terminal, the technical regulations compliance certification becomes invalid.

Do not use the terminal with the certification invalid, as it is a violation of the Radio Law.

- **Be careful when using the terminal while driving.**

A penalty may be imposed for using by holding a mobile phone with the hand while driving.

However, absolutely necessary cases such as rescue of a sick person or maintaining public's safety are exempted.

- **Use FeliCa reader/writer function only in Japan.**

FeliCa reader/writer function of the terminal complies with the wireless standards in Japan.


You may be punished if you use the function overseas.

- **Do not modify the basic software illegally.**

It may be regarded as modifications and repair may be refused.

Getting started

Part names and functions

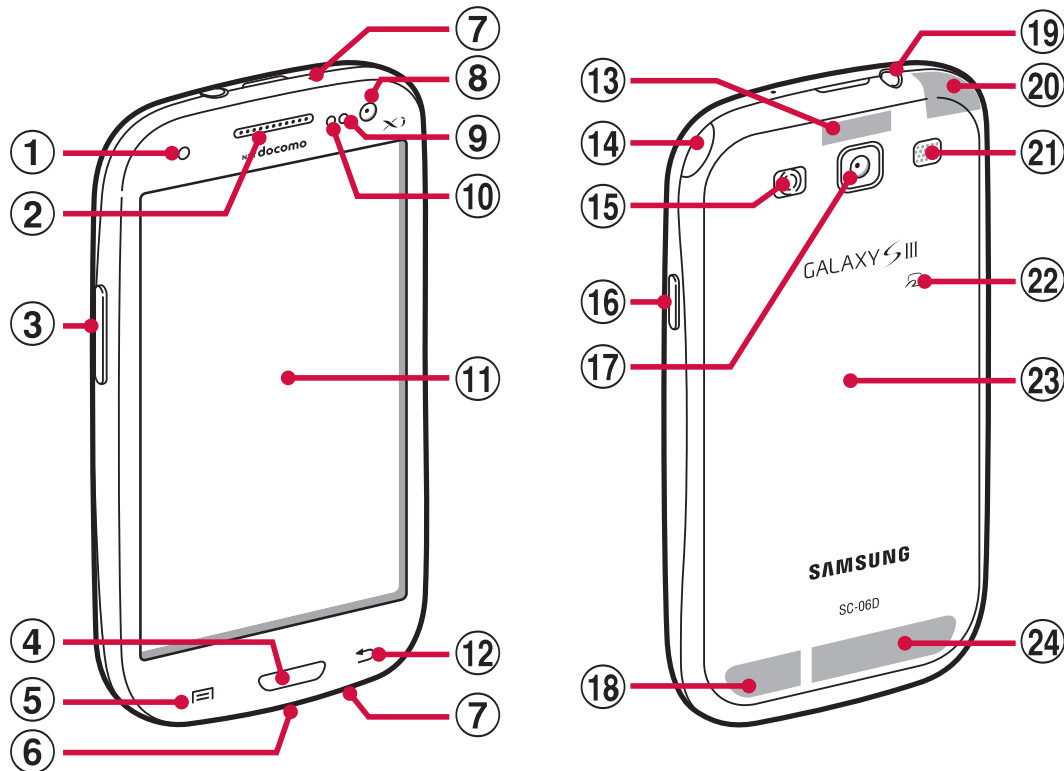

- ① **Notification LED** → P.96
- ② **Earpiece**
 - Hear the other party's voice from here.
- ③ **Volume Key** → P.263
- ④ **Home key**
 - Return to the Home screen during operation.
 - Press and hold for 1 second or longer to display recently used application list (P.99), then tap "Task manager" to activate Task manager (P.100).
- ⑤ **Menu key**
 - Display menu.
- ⑥ **External connection jack**

- ⑦ **Microphone**
 - Upper microphone can be worked only when shooting video.
 - Lower microphone can be worked for calling, voice recognition, recording in voice recorder, etc.
- ⑧ **In-camera**
- ⑨ **Proximity/Light sensor**
 - Sense a face approaching or ambient brightness to turn off the screen display or adjust brightness of the display automatically.
- ⑩ **Proximity sensor**
 - Sense close of face during a call, etc. to turn off the display screen.
- ⑪ **Display (touch screen) → P.76**
- ⑫  **Back key**
 - Return to the previous status of key operation for Menu display, etc.
 - End application.
- ⑬ **GPS antenna***
- ⑭ **1 Seg antenna**
- ⑮ **Light**
 - Lights up when shooting image and video.
- ⑯  **Power/Screen lock key**
 - Press this key for 1 second or longer to turn on the power of the terminal.
 - You can set the screen lock manually (P.75).
- ⑰ **Out-camera**
 - Shoot still images or video (P.365, P.366).
- ⑱ **Bluetooth/Wi-Fi antenna***
- ⑲ **Headphone connection jack**
 - 3.5 mm diameter connection jack for connecting Stereo Headset with microphone (sample), etc.
- ⑳ **Xi antenna***

②1 **Speaker**

- Ringtone sounds.
- When talking with hands-free, hear the other party's voice from here.

②2 **mark**

②3 **Back cover**

②4 **FOMA/Xi antenna***

* It has a built-in antenna. Covering around antenna may affect the quality.

docomo mini UIM card

docomo mini UIM card is an IC card storing user information such as phone numbers. If the docomo mini UIM card is not inserted, you cannot use the terminal for communication such as calling, sending/receiving Emails, data communication.

- Only the docomo mini UIM card is available for this terminal. If you have the UIM card or the FOMA card, exchange it for the docomo mini UIM card at the docomo Shop.
- In Japan, calls to emergency telephone numbers (110, 119, 118) cannot be made if docomo mini UIM card is not installed.
- In addition to docomo mini UIM card no longer being usable with other supported terminals, due to changes in docomo mini UIM card, some websites and data might no longer be usable.
- For details on handling docomo mini UIM card, refer to the docomo mini UIM card manual.

Security codes of the docomo mini UIM card


The docomo mini UIM card has security code, named PIN code (P.291).

Attaching/Removing docomo mini UIM card

Attaching docomo mini UIM card

- 1 With the IC face down, insert the docomo mini UIM card into the docomo mini UIM card slot in the direction shown on the illustration

When you insert it in the correct direction, the docomo mini UIM card is hit lightly to a guide inside of the docomo mini UIM card slot. Continue to insert to the end until it clicks.

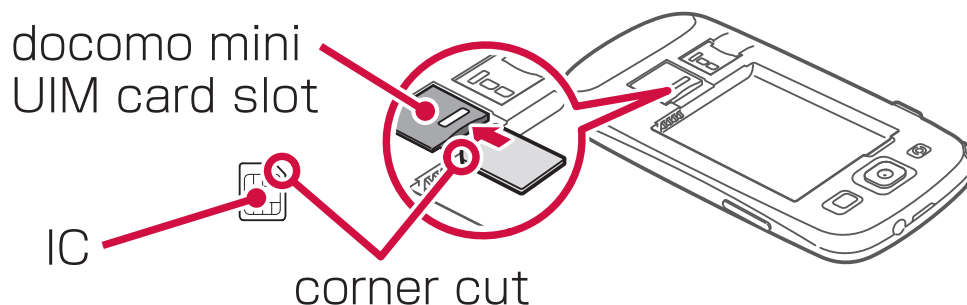


Removing the docomo mini UIM card

- 1** Push the docomo mini UIM card attached to the terminal lightly

The docomo mini UIM card is popped out a little.

- 2** Pull the docomo mini UIM card straight out in direction shown as in illustration

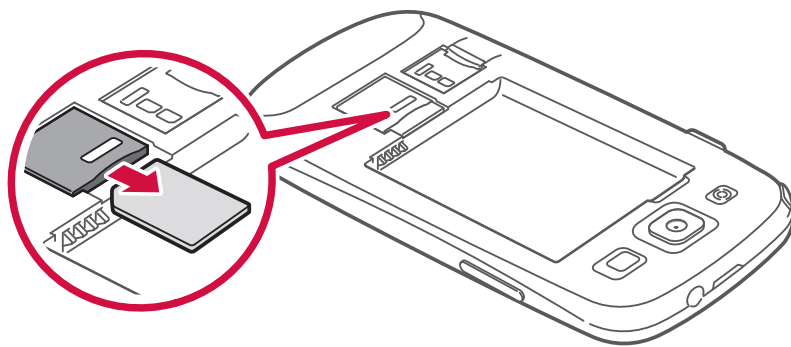

Information

- For handling the docomo mini UIM card, take care not to touch or scratch the IC side.
- Attaching or removing forcibly may damage the docomo mini UIM card.
- Be careful not to lose the removed docomo mini UIM card.

microSD card

You can attach microSD card (including microSDHC card and microSDXC card) to the terminal and use it.

- This terminal supports microSD card of up to 2 GB, microSDHC card of up to 32 GB and microSDXC card of up to 64 GB (as of June, 2012). However, actual operations are not guaranteed for all microSD cards sold commercially.
For compatible microSD cards, contact each manufacturer of microSD card.
- Do not insert a microSDXC card in a device that does not support SDXC. Doing so may damage data stored in the microSDXC card.
- If you want to use a microSDXC card after stored data is damaged, you need to format the microSDXC card by inserting it into an SDXC compatible device (all stored data is erased).


Attaching/Removing microSD card

- When attaching/removing, the microSD card may be popped out.

Attaching microSD card

- 1 With the metal contacts facing down, insert the microSD card into the slot in the direction shown in the illustration until it is fixed

When you insert it in the correct direction, the microSD card is hit lightly to a guide inside of the microSD card slot. Continue to insert to the end until it clicks.

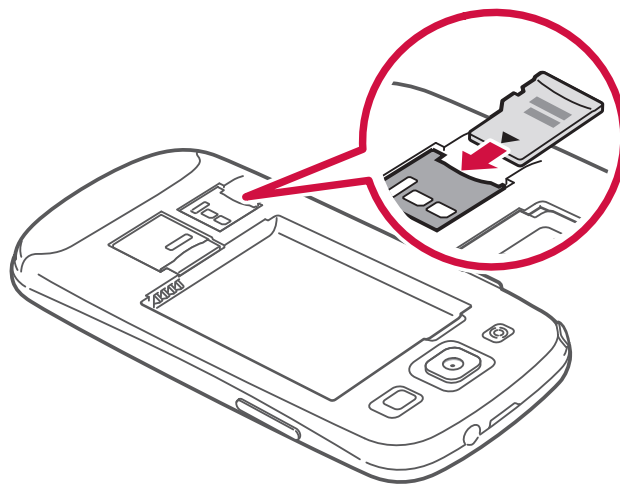


Removing microSD card

To remove the microSD card, perform "Unmount SD card" (P.273).

- 1** Push the microSD card attached to the terminal lightly

The microSD card is popped out a little.

- 2** Pull microSD card straight out in direction shown as in illustration

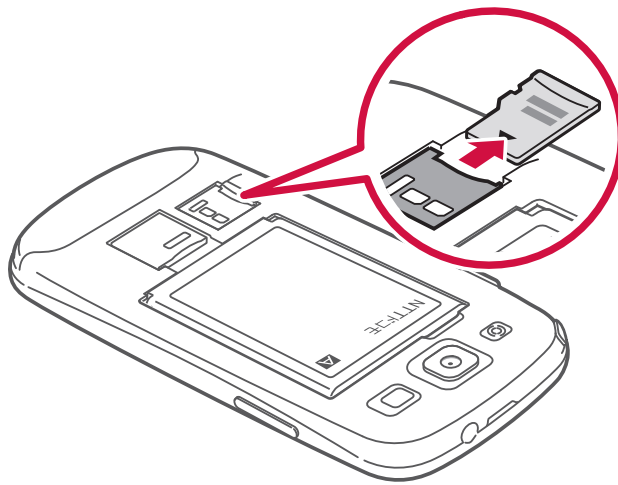

Information

- When removing, the microSD card may be popped out from the terminal.

Formatting microSD card

Note that formatting microSD card erases all data in the microSD card.


- 1** From the Home screen,  → "Settings" → "Storage"
- 2** "Format SD card" → "Format SD card" → "Delete all"

Battery pack


- Attach/Remove the battery pack after turning the power off.
- For attaching/removing the back cover, hold the terminal with hand not to damage the display, etc. And be careful not to press  with your finger or hand.
- Do not bend/twist with excessive force to attach/remove the back cover. The back cover may be damaged.
- Use the battery pack SC07 for this terminal.

Attaching the battery pack


- 1** Put fingernail in notch ① in rear cover, lift up a little in the direction ② and remove in the direction ③
 - Be careful not to hurt your nail.

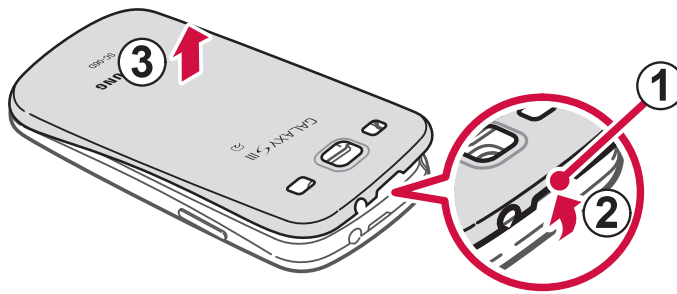

- 2** With facing the Battery pack **A** mark up, align the tabs of the terminal with groove of the battery pack correctly, press the battery pack to direction ① and push to the direction ②

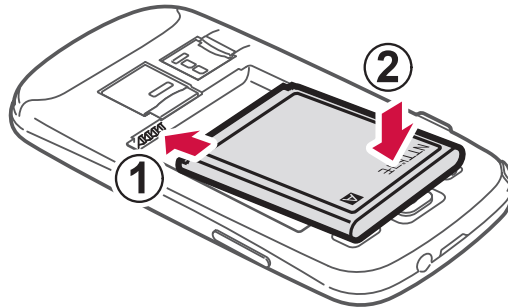


- 3** Check the orientation of the back cover, align the back cover with the terminal, and then attach the back cover pressing firmly so as not to make any gap

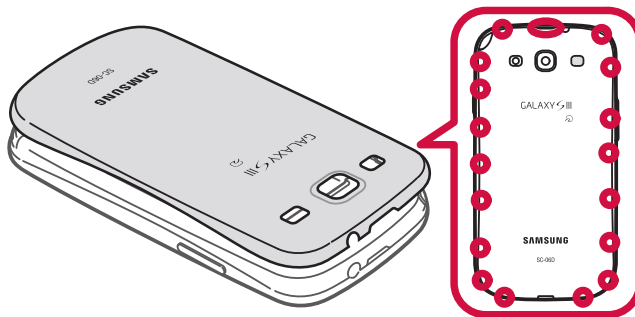


Press parts marked by  firmly and make sure that there are no gaps between the cover and terminal.

Removing the battery pack

- 1 Put fingernail in notch ① in rear cover, lift up a little in the direction ② and remove in the direction ③
 - Be careful not to hurt your nail.

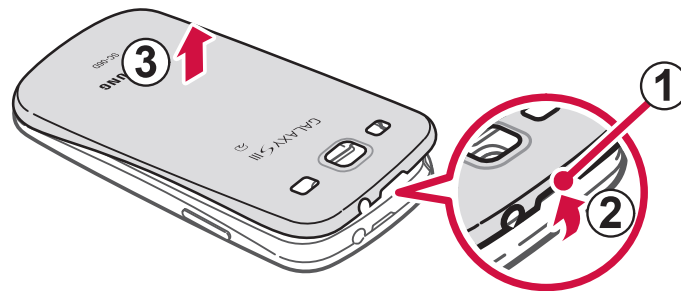

- 2 Hold the battery pack up using the groove of the terminal with your finger, and then remove it

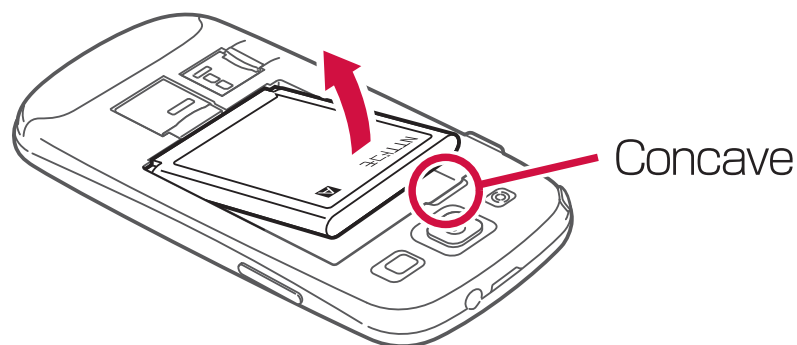

Charging

Use Battery Pack SC07 for this terminal.

■ Battery pack life

- The battery pack is a consumable accessory. Each time it is charged, time available with each charging reduces.
- When a time available with each charging is reduced to about a half from that of a new battery, replacement of the battery is recommended because it is near the end of life. The battery pack may swell out as it comes to near the end of its lifetime depending on the usage conditions, but it is not a problem.



Li-ion00

■ Battery charge

- Attached AC adaptor SC04 supports from AC100V to 240V.
- For details, refer to the operation manuals for FOMA AC Adapter 02 (optional), AC adapter 03 (optional), FOMA AC Adapter 01 for Global use (optional), FOMA DC Adapter 01/02 (optional) or DC Adapter 03 (optional).
- FOMA AC Adapter 02, AC adapter 03 and FOMA AC Adapter 01 for Global use are applicable to AC 100-240V.
- AC Adaptor has a plug dedicated to AC 100V (for domestic use). When using the AC adapter in the range of AC 100V and

240V overseas, a conversion plug adapter applicable to the country you are staying is required. Do not charge the battery using a transformer for overseas travel.

- When the terminal is turned ON, you can receive a call even while the terminal is charged. However, in that case, charging requires longer time because of reducing charging volume.
- When inserting/removing the connector, make sure not to put excessive force.
- Do not remove the battery pack while it is charged.

■ **Do not charge the battery pack for a long time (for some days) with the terminal powered on.**

- If you remain the terminal power on for a long time while charging, the power supply starts from the battery pack after completion of charging. The usage time duration may be short and the battery alarm sounds soon. In that case, please charge it again correctly. For recharging, remove the terminal from the AC Adapter or DC adapter and reconnect it again.

■ **Estimate battery pack operating time**

- The operating time of the battery pack varies depending on the operating environment and the secular degradation of the battery pack.

Continuous stand-by time	FOMA/3G	Stationary (Auto): Approx. 400 H
	LTE	Stationary (Auto): Approx. 270 H
	GSM	Stationary (Auto): Approx. 330 H
Continuous call time	FOMA/3G	Approx. 500 min.
	GSM	Approx. 600 min.

- Continuous call time is an estimate of the operation time for calling when radio wave reception is normal.
- Continuous stand-by time is an estimate of the stand-by time when radio wave reception is normal. In certain circumstances, the call time, the communication time and the stand-by time may drop to as low as half the time shown due to the battery charge, function settings, temperature, or radio wave reception in the area (no reception or weak). A use of the Internet reduces the actual call (communication)/stand-by time. Even if you do not call or use the Internet, composing emails, activating downloaded application, performing data communication, using camera, playing videos, using music playback or Bluetooth connection also reduces call (communication)/stand-by time.
- The continuous call time and continuous stand-by time may be reduced depending on the network condition in the country you stay.

- Stationary continuous stand-by time is the estimated average operation time when radio wave reception is normal.


■ Estimate charging time

AC Adapter SC04	Approx. 190 min.
DC Adapter 03	Approx. 200 min.

- Estimate charging time is the time for charging an empty battery pack with the terminal power off. For charging with the terminal power on, it takes longer.

Charging with the AC Adapter SC04

Charging using AC adapter SC04 and USB cable SC02 is explained here.

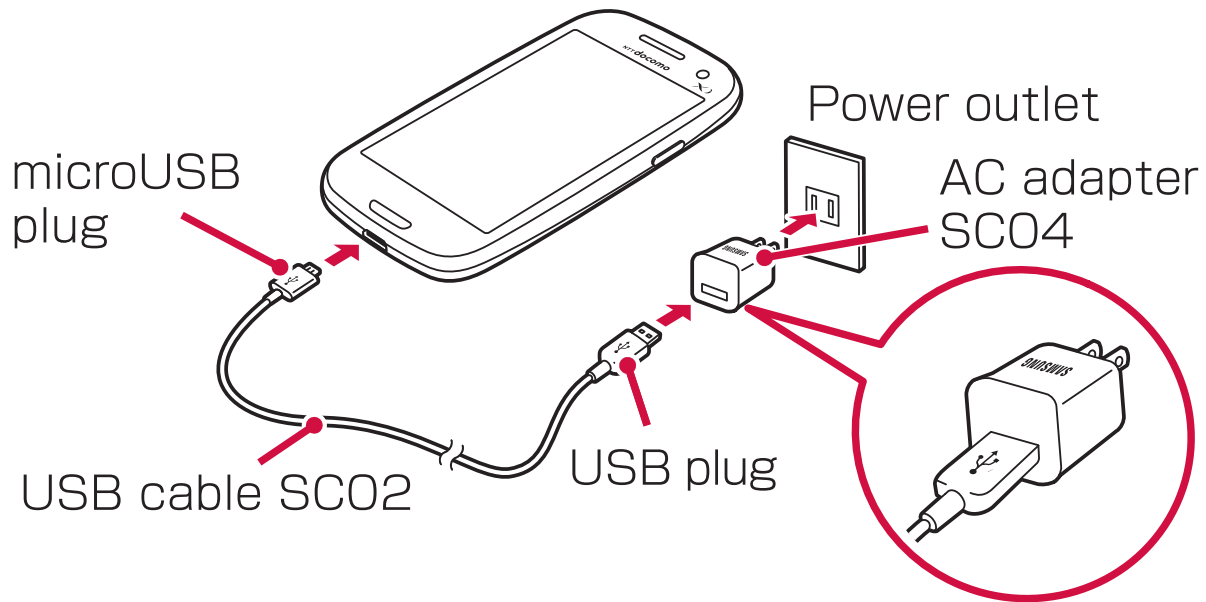

- 1** Insert the USB plug of USB cable SC02 with facing  printed side up into AC adapter SC04 horizontally and firmly as shown
 - If USB plug is not inserted to AC adapter SC04 firmly, charging may be failed.
- 2** Insert the microUSB plug of USB cable SC02 with facing  printed up into the external connection jack of the terminal
- 3** Insert the power plug of AC adapter SC04 to the outlet
 - Do not put strong force on the AC adapter SC04's power plug. The power plug may come off.
 - When charging is completed,  appears on the status bar.

- 4** When charging is completed, pull out the microUSB plug of USB cable SC02 from the terminal horizontally
- 5** Pull out the USB plug of USB cable SC02 from the AC adapter SC04 horizontally
- 6** Pull out the power plug of AC adapter SC04 from the outlet horizontally

Charging with USB cable SC02

You can charge the terminal with a PC by connecting to PC using USB cable SC02.

- For connection to a PC, see P.317.
- When you perform USB connection with a PC, "新しいハードウェアの検索ウィザードの開始 (Start new hardware search wizard)" screen or "同期セットアップウィザード (synchronization setup wizard)" screen may appear on the PC. If you just want to charge the terminal without synchronizing to the PC, select "キャンセル (Cancel)".
- Depending on the terminal condition, it may take time for charging, or may not be charged.

When the battery is almost exhausted

Notification tone sounds, a message prompting to charge appears and the display dims. When the battery is exhausted, the power of the terminal automatically turns off. When you tap "Battery use" displayed with a message prompting to charge, functions presently consuming the battery power appear by a list. Depending on the function or application, a message indicating low battery may appear when you try to activate them and they may not be activated.

Turning power ON/OFF

Turning power ON

1 Press for 1 second or longer

The starting screen appears, and then the Home screen with screen locked appears (P.293).

When you turn the power on for the first time

Make the initial settings following to the onscreen instructions (P.86).

2 Tap

- When the Home screen is set to "TouchWiz home", swipe (P.78) the screen up, down, left or right until the screen lock is unlocked.
- When the screen lock (P.293) is set to "Swipe/Touch", the notification panel can be displayed while the screen is locked (P.94).

■ Checking the radio wave condition

An icon indicating radio wave reception level appears on the status bar (P.89).

When  appears, you are out of Xi/FOMA service area or in a place where the radio wave cannot reach.

Turning power OFF

- 1** Press  for 1 second or longer
Device options screen appears.
- 2** "Power off" → "OK"
After exit screen appears the power turns off.

Changing screen display to English

- 1** From the Home screen,  → "本体設定 (Settings)" → "言語と文字入力 (Language and input)" → "言語 (Language)" → "English"

Setting/Canceling the screen lock

You can set the screen lock to prevent the erroneous operation of the touch screen or keys.

- When the display is turned off with "Screen timeout" (P.266) set, the screen lock activates automatically after about 5 seconds.

Setting the screen lock

1 Press

The display turns off and the screen lock is set.

Canceling the screen lock

1 During the screen lock, press /

Unlock screen appears.

2 Tap

- When the Home screen is set to "TouchWiz home", swipe the screen up, down, left or right until the screen lock is unlocked.

Information

- When notification information for missed calls or sp-mode mail arrives during the screen lock, a number (number of notifications) may be appeared to the icon on the unlock screen. When the Home screen is set to "TouchWiz home", an icon of notification information may be displayed on the unlock screen.
- You can set up that unlock method is required to unlock screen lock (P.293).

Basic Operation

You can operate the terminal variously with touch screen and motions.

- Do not contact the touch screen with electric materials or metallic materials. The terminal might not operate well due to static electricity.
- The touch screen might not operate when you use the terminal during charging. In that case, remove the terminal from the charger.
- Do not cover the antenna section with your hand when operating the terminal while holding it.

Using touch screen

Notes on using the touch screen

- Touch screen is designed for being touched lightly with fingers. Do not push it forcibly with a finger or press it with sharp objects (a nail,


ballpoint pen, pin etc.).

- The touch screen may not work in the following cases. Note that it may cause malfunction.
 - Operation with gloved hands
 - Operation with tip of fingernail
 - Operation with a foreign object on the display
 - Operation with protective sheet or seal, etc. on the display

You can operate the touch screen (display) of the terminal by directly touching with your finger. In this manual, main operations are described as follows.


■ Tap/Double-tap

Touch a displayed item or icon lightly with your finger to select/perform (Tap). Tap twice quickly on a displayed image or web page to zoom in/out the contents (Double-tap).

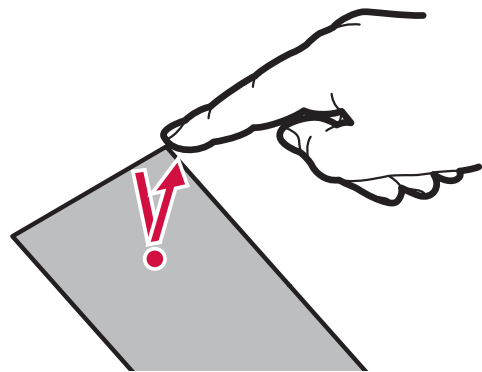


■ Touch and hold

Touch and hold a displayed content or item for 1 second or longer to display menu etc.

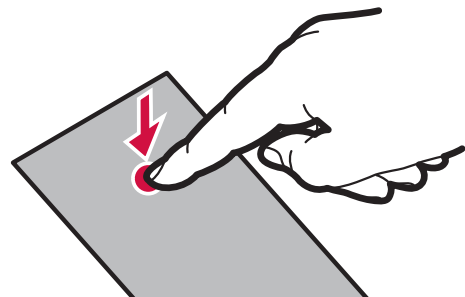


■ Drag

With pressing with your finger, move a displayed item or icon.

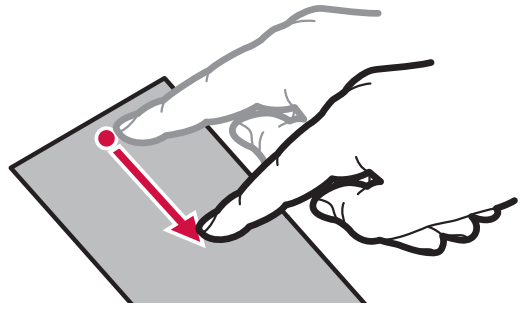


■ Swipe

Lightly move your finger across the surface of the screen.

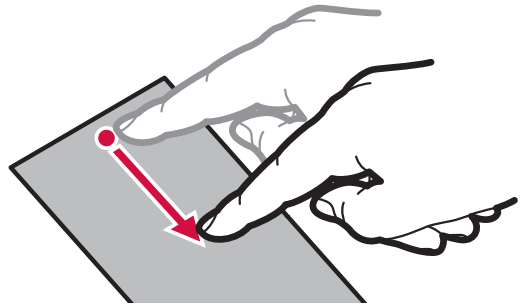


■ Scroll

With pressing a displayed content with your finger, move it up/down/right/left or switch the views.

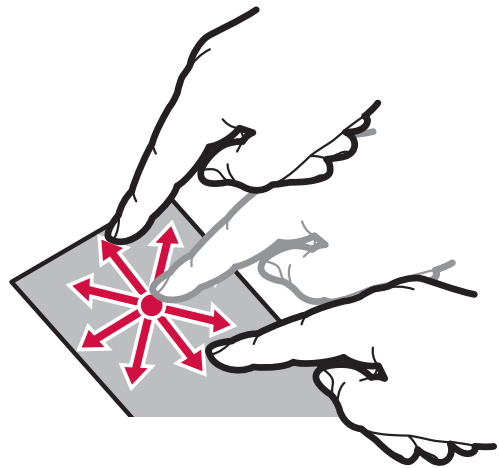


■ Flick

With pressing a displayed content with your finger, move it quickly up/down/right/left and release it to scroll the content.

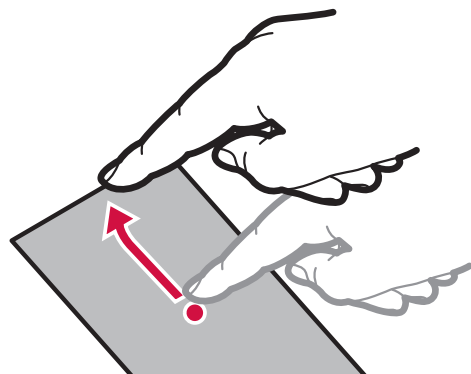

■ Widen/Narrow two fingers' distance

With pressing a displayed image or web page with your two fingers, widen or narrow the distance to zoom in/out the content.

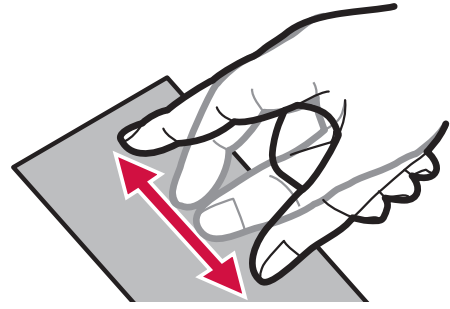

Using Motion

Use simple Motion functions to implement a variety of functions such as searching for nearby Bluetooth devices or muting ringtone and reproduced sound.

- * This feature may not be available for applications provided by DOCOMO and some other applications.

Main Motion functions


Activate Motion function before using. From the Home screen,  → "Settings" → "Motion" → Mark "Motion activation" and tap  for a motion to use to enable.

- In "Hand motions", mark motions to use.
- Tap an item other than "Hand motions" to display tutorial to check operations. Some items allow you to adjust sensitivity.

■ Direct call


When SMS list screen or detailed screen of "Contacts" application provided by Samsung is displayed, pick up the terminal and bring it close to your face to call the contact.

- * The international dial assist screen may appear when making a call.

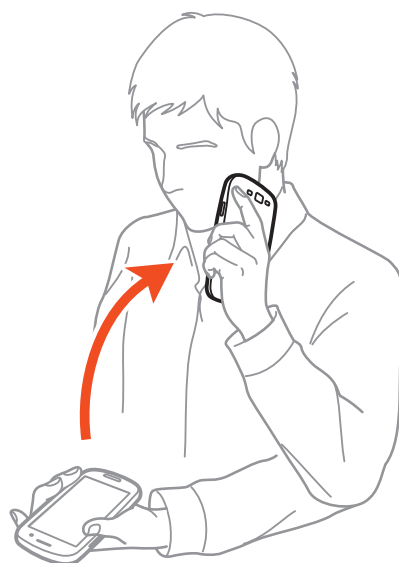


■ Smart alert

If you pick up the terminal when there are missed calls or new emails and the screen turns off, the terminal vibrates to notify.

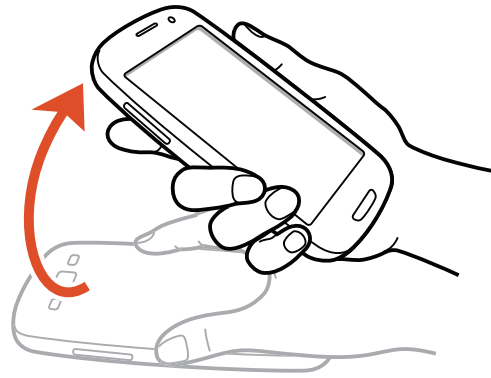


■ Double tap to top

While Email list or contacts list in "Contacts" application provided by Samsung etc. is displayed, double tap the top of the terminal to display the top of the list.

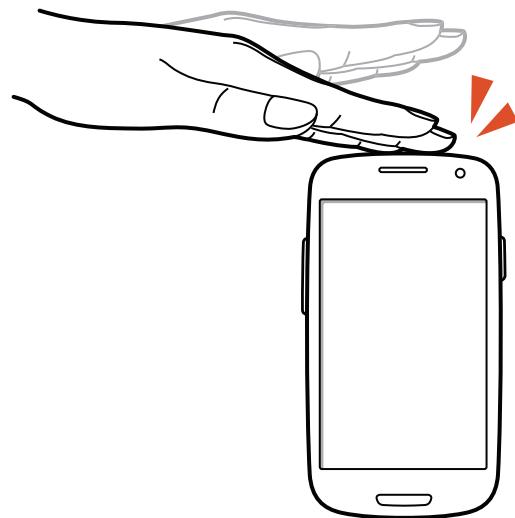


■ Tilt to zoom

When displaying image data or browser screen, tilt the terminal touching and holding 2 spots on the screen to zoom in, or zoom out screen.

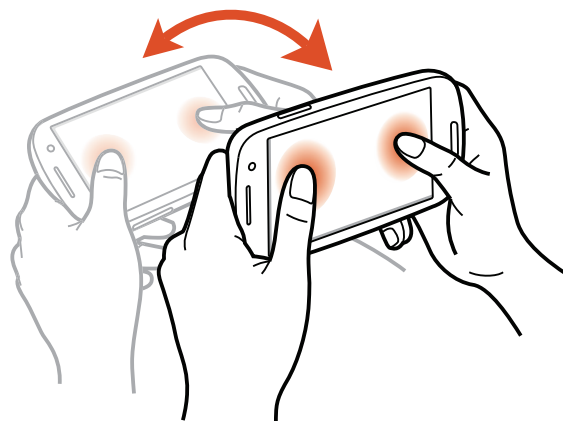


■ Pan to move icon

If you swing the terminal left or right while you touch and hold an icon, the icon is moved to another page.

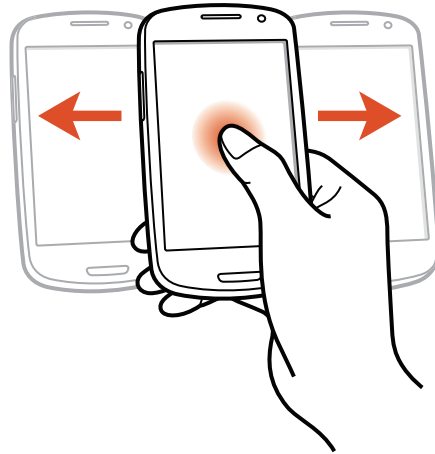


■ Pan to browse images

When an image is zoomed in, touch and hold the image and shake the terminal up, down, left or right to move in the image.

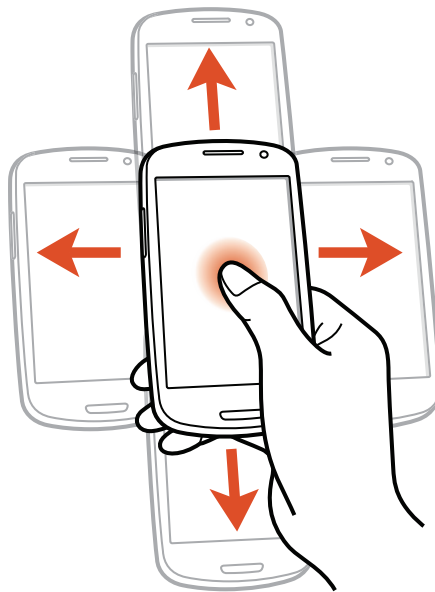


■ Shake to update

When displaying setting screen for Bluetooth, Wi-Fi or Wi-Fi Kies connection, shake terminal right and left to automatically search for connectable devices.

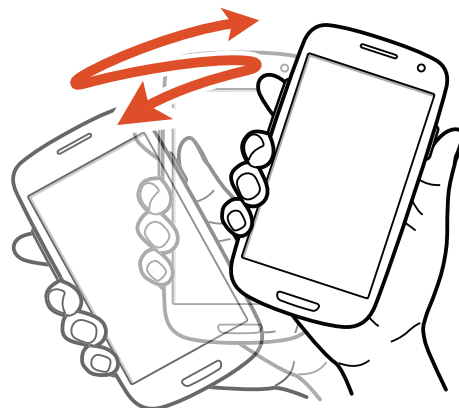


■ Turn over to mute/pause

While phone ringtone, notification ringtone or alarm is sounding, or music/video is played, turn over the terminal to mute/pause (except when display is OFF).

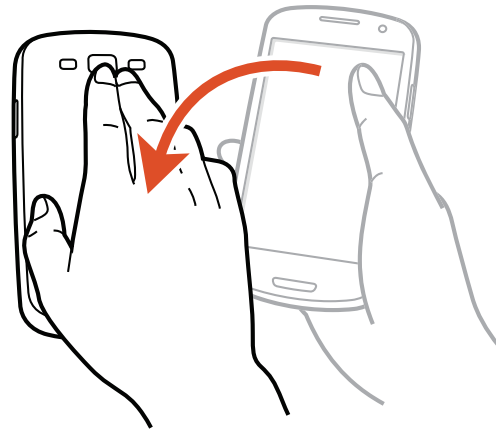

■ Palm swipe to capture

Swipe the screen from right to left or vice versa with the side of your hand to capture the displayed screen.

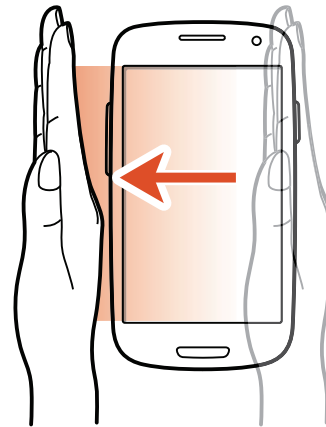

■ Palm touch to mute/pause

When playing music, video, etc., cover the screen on the terminal with your hand to mute/pause playback sound (except when display is OFF).



Information

- If you activate a feature with which you can use motion functions, a confirmation screen appears for using functions. Tap "Enable motion" or "Motion activation". to set the function ON. If you mark "Do not show again", the confirmation screen no longer appears.

Switching the orientation of the display automatically

This terminal supports a motion sensor that senses the vertical/horizontal orientation or tilt of the terminal and switches the display view automatically.

1 From the Home screen,  → "Settings" → "Display"

2 Mark "Auto-rotate screen"

Information


- You can also set auto rotate screen on the notification panel.
- Home screen or some functions may not automatically switch the view orientation.


Saving the display content as an image

Save screen content as image (screen capture).

- Screen capture may not be available for some applications.

1 Display a screen you want to save as an image

2 Press  and  at the same time

- Press and hold  and  until the screen is captured. When an image is saved,  appears on the status bar.

Information

- Captured images are saved in the png format, and you can check them from the Home screen,  → "Gallery" → "Screenshots" folder.
- Mark "Palm swipe to capture" (P.83) so that screen capture is available by swiping the screen of the terminal from right to left or vice versa with the side of your hand.

Initial settings

When you turn this terminal ON for the first time after purchasing, follow the onscreen instructions to make settings for language, Google account settings, Google location information settings, and initial setting for docomo service.

1 "Start"

- To change the language, select "English" → Language you want to use.

2 Set a Google account

- Tap "Not now" to set an account later.

■ When not connecting to the internet

Follow the onscreen instructions to set the Wi-Fi (P.241) then set a Google account or perform operations for setting later.

3 Set whether to purchase by Google Play

4 Set whether to restore or back up using a Google account → "Next"

5 Set whether to permit to use Google location → "Next"

- When an entry screen for owner of the terminal, operate according to the onscreen instructions.

6 "Finish"

- Continue to perform initial settings for DOCOMO Services.

7 "Next"

- A screen for installing applications collectively appears.
- Select "Install" to install applications for service you have already subscribed. To stop installing them, select "Not install".

8 "Next"

- An initial setting screen for using Osaifu-Keitai appears.
- When you select "Set", tap "Next" and operate according to the onscreen instructions.

9 "Next"

- Setting screen for docomo apps password appears.

10 Set a docomo apps password.

- If you select "Set", enter a docomo apps password.

11 "Next"

- A screen for the location information appears.
- Select "Location providing ON" to permit sending location information.
- Select "Location providing OFF" to reject sending location information.
- Select "Unknown blocking" not to send location information to the other party who is not saved in Phonebook.

12 "Next" → "OK"

- A Home selection screen appears.

13 "docomo Palette UI" → "OK"

- Select "TouchWiz home" to use the Home for the terminal.
- From the Home screen, tap  → "Settings" → "Home selection" to change the Home.

Display and icons


In the status bar at the top of the display, icons which indicate the terminal status or notification information are displayed. Notification icons appear on the left side of status bar, and status icons appear on the right side of status bar.



Status bar

Main notification icons

Notification icon	
	Receiving
	Missed call exists
	New Gmail exists
	New Email exists
	New SMS exists
	Delivery report of SMS exists
	Trouble in delivery of SMS
	New instant message exists

Notification icon	
	Data downloading/Download completed
	Data uploading/Upload completed
	Uploading data to Picasa, etc. completed
	Messages in Voice Mail service exist
	Alarm exists
	Alarm for schedule, etc. exists
	Playing/Pausing music in the background
	Scanning microSD card
	Canceling microSD card mount
	USB connecting
	Error message exists
	GPS function in operation (in animation) / Locating completes (animation display stops)
	USB tethering enabled
	Wi-Fi tethering enabled

Notification icon	
	USB tethering and Wi-Fi tethering enabled
	No docomo mini UIM card
	Update of application installed from Samsung Apps exists
	Setting/Checking software update
	Updatable application exists in dmarket
	Updatable application exists in Google Play
	Installation of application is completed
	Hidden notification information exists (number indicates item numbers)
	VPN connecting
	Image saved by screen capture exists
	Available Wi-Fi open network exists
	Keyboard is displayed
	Available memory space of the terminal drops
	Watching/Recording 1 Seg

Notification icon	
	Omakase lock is set

Main status icons


Status icon	
 (Weak ⇔ Strong)	Radio wave condition
 (Weak ⇔ Strong)	Radio wave condition (roaming)
	Out of service area
	In Airplane mode
	Connected to LTE network (arrow color: gray)
	LTE network communication in use (arrow color left: orange, right: green)
	Connected to 3G network (arrow color: gray)
	3G network communication in use (arrow color left: orange, right: green)
	Connected to FOMA HIGH-SPEED/HSDPA network (arrow color: gray)

Status icon	
	FOMA HIGH-SPEED/HSDPA network communication in use (arrow color left: orange, right: green)
	Connected to GPRS network (arrow color: gray)
	GPRS network communication in use (arrow color left: orange, right: green)
	Connected to Wi-Fi network (arrow color: gray)
	Wi-Fi network communication in use (arrow color left: orange, right: green)
	Bluetooth function ON
	Connected to Bluetooth device
	In Silent mode (Vibrate)
	In Silent mode (Mute)
	Alarm set
	Hands-free call in use
 (Low ⇄ High)	Battery level

Status icon	
	Charging battery
	Wi-Fi Direct function ON
	Wi-Fi Direct connected

Notification panel

Scroll the status bar downward to display notification panel. You can tap the icons to set function or check the notification information.

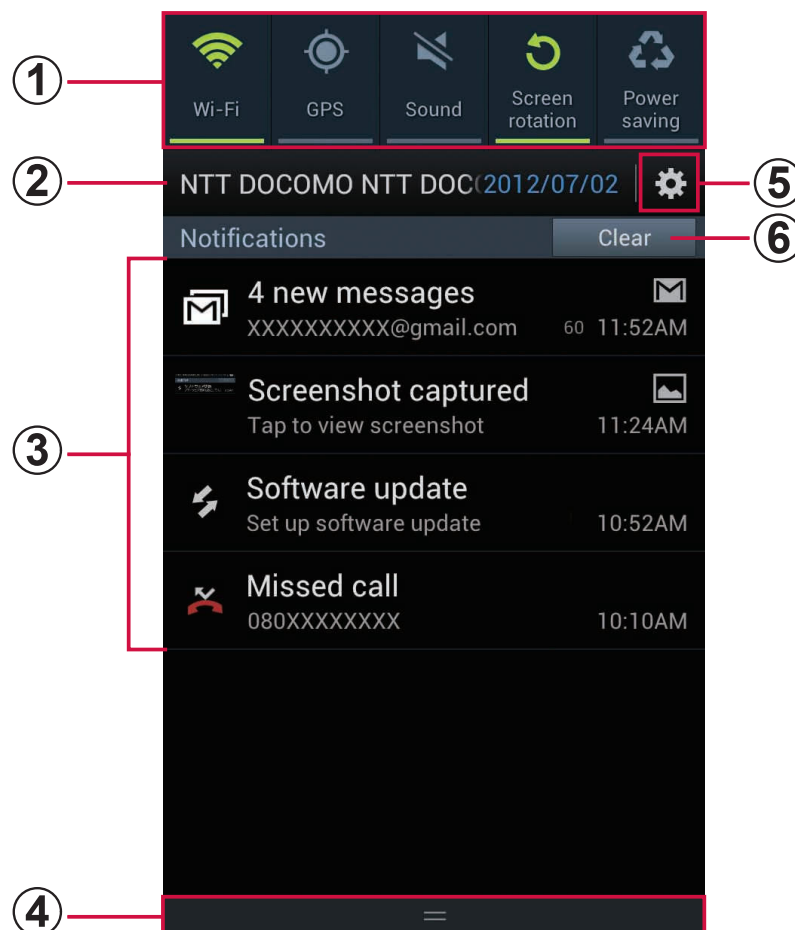

Screen of Notification panel (example)

- ① Switch ON/OFF for settings. Drag left and right to display icons that are not displayed.

- Wi-Fi: → P.241
- GPS: → P.382
- Sound: → P.260
- Screen rotation: → P.84
- Power saving: → P.272
- Notification: Switch ON/OFF for notification icons.
If OFF is set,  appears on the status bar and a status icon does not appear.
- Mobile data: Switch ON/OFF for data communication. If OFF is set, data communication by the mobile network is not available.
- Bluetooth: → P.246
- Sync: Switch ON/OFF for synchronization.

② Display the connecting network operator name.

③ Information in progress or notifications is displayed.

④ Scroll upward to close notification panel.

⑤ Tap to display the setting menu (P.238).

⑥ When displayed, tap to delete notification information and notification icon on the status bar.

- Some notification information may not be deleted.

Information

- Icons displayed in ① turn green when enabled.

Notification LED

In the state that the screen is off, when notifications for missed calls etc. exist or while charging, notification LED lights/blinks to notify about notifications or the condition of terminal.

Operations	Description
Lights red*	Charging battery
Lights green	Charging completes
Blinks red*	Battery level is low
Blinks blue*	Notifications such as missed calls, new mails, etc. exist.
Lights blue and light blue in alternate shifts	Turning on to activate/turning off to shut down

* Set whether to activate notification LED by "LED indicator" (P.270).

Information

- If a notification exists during charging, operation for a notification (blinking blue) is given priority.

Using Quick search box

You can search information including entered word in the terminal or on the Internet.

1 From the Home screen, Tap Quick search box



Quick search box

- ① An entered character appears.
- ② Information or search options saved in the terminal containing the entered characters appear.
- ③ Tap after text entry to delete all entered characters.
When any characters are not entered,  is displayed. Tap it to enter a word you want to search by voice sound (only for web search).
- ④ Displays search option again by selected characters.

Information

- Alternatively, from the Home screen,  → "Search" to activate Quick search.
- For voice input, connection via Mobile network is required.
Wi-Fi connection may not be available.


Search menu

Tap  to display following items.


Item	Selection
Settings	
Searchable items	Specify target to search in the terminal.
Google Search	
Google Account	If you set up two or more Google accounts, select a Google account to use.
Use Web History	Set whether to display set up Google account's web history as a candidate.
Manage Web History	Activate Browser to manage a web history.
Clear on-device search history	Delete search history of contents and applications on the terminal.
Use My Location	Set whether to use location information for Google search result and services.
Search on google.com	Set whether to use local domain (http://www.google.com) to search.


Item	Selection
Settings	
Google Search	
Terms of Service	Shows Terms of use of Google Search.
Open Source Licenses	Shows Open source license.
Help	Shows descriptions on using Google Search.

Opening a list of recently-used application

- 1 Press  for 1 second or longer
 - Tap an icon to activate the application.
 - Tap "Task manager" to activate Task manager (P.100).
 - Tap "Remove all" to remove the list. Scroll/flick an application left or right to remove the application.

Checking/Ending a running application

- 1 Press  for 1 second or longer → "Task manager"

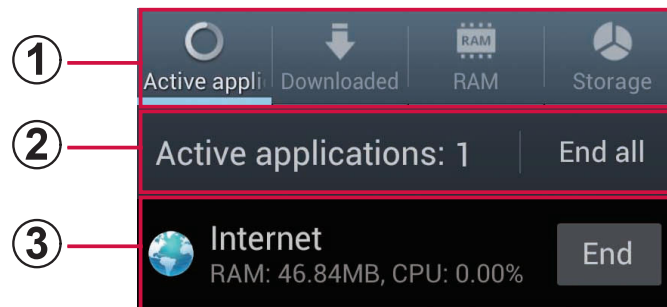

Task manager screen

- ① **Tab**
"Active applications": Display a list of running applications.
Tap  → "List by" to change display order of the list.
"Downloaded": Check the installed application list and memory usage status. Tap to "Uninstall" → "OK" to uninstall the application.
"RAM": Check RAM usage state. Tap "Clear memory" to erase the contents of RAM.
"Storage": Check usage state of each memory.
"Help": Display using method of the terminal for saving the battery life or the description of the RAM manager.
- ② **Number of running applications**
Tap "End all" to end all running applications.
- ③ **List of running applications**
Tap "End" to end the application.
Due to usage rate of CPU, the text color changes. It becomes red if the usage rate is high.

Information

- When several applications are running, battery consumption may increase and usage time may shorten. Therefore, ending unused applications is recommended. To end an application, tap "End" on the running application list (P.100) or tap  on the running application screen to display the Home screen (P.126).

Entering characters

To enter characters, tap the character entry field to display the keyboard for character entry, and then tap a key of the keyboard. For the keyboards for character entry, there are the following 2 types.

- Samsung keyboard
- Samsung Japanese keypad

Information

- You cannot input Japanese with Samsung keyboard.
- Use Google voice input to enter characters by voice sound.
- Depending on usage condition, the display or operation of each keyboard may differ or the dedicated keyboard for the application or function you use may appear.

Switching keyboard types (input method)

- 1** While the keyboard is displayed, open the notification panel
- 2** "Select input method"
 - "Select input method" screen appears.
- 3** Tap a input mode you want to use


Information

- From the Home screen,  → "Settings" → "Language and input" → If you mark "Google voice typing", Google voice input appears on the "Select input method" screen, then tap to enter texts by voice sound.

Entering with Samsung Japanese keypad

In Samsung Japanese keypad, you can use two types of keyboards: "3x4 Keypad" and "QWERTY Keyboard".

- 3x4 Keypad: it is a keyboard similar to a general mobile phone keyboard (for multi-tap method). Tap a key assigned character you want to enter several times until the target character is entered.
- QWERTY Keyboard: it is a keyboard similar to the one of PC. Enter Japanese in Roman character.

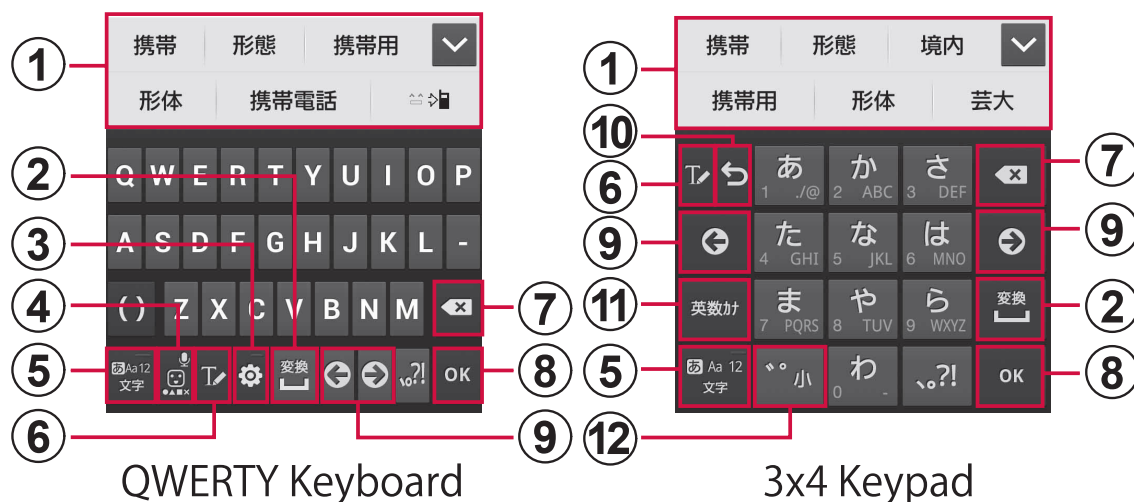

- ① Display predictive options/usual conversion options. Tap an option to enter text.
 - When Word Prediction is set to OFF, if is tapped while the predictive options is displayed, usual conversion options appear.
 - Tap to display predictive options/usual conversion options in full screen. Tap to return the previous display.

- ② **Display usual conversion options.**
 - If suggestions are not displayed, tap to enter a space.  is displayed only when entering Japanese.
- ③ **Display setting menu or switch keyboards.**
- ④ **Display Emoji/Symbol/Emoticon list.**
 - Tap the tab to switch lists.
 - Tap  for voice input.
 - Tap  to display the keypad.
- ⑤ **Switch character input mode (P.106).**
- ⑥ **Switch to handwriting box.**
- ⑦ **Delete characters or symbols to the left of the cursor.**
- ⑧ **Confirm entered characters.**
 - When  is displayed, tap it to insert a linefeed.
 - When  appears, tap to move the cursor to the next entry field.
 - When  /  appears, tap to search.
- ⑨ **Moves cursor right or left.**
 - Tap  to continue inputting characters assigned to the same button in 3x4 Keypad.
 - When Wildcard Prediction is set to ON, wildcard prediction can be used (P.107) by tapping.
- ⑩ **Switch an unconfirmed character to the one in reverse order of when you tap the key.**
 - If character is not entered,  appears. Tap to display setting menu.
- ⑪ **Alphanumeric/katakana conversion options appear. Tap again to display predictive options/ usual conversion options.**
 - When a character is not entered,  (Emoji/Symbol/Emoticon) appears.
- ⑫ **Put a voiced sound mark or the Japanese voiceless bilabial sound mark. Switch upper/lower case.**
 - In Full/Half-width alphabet input mode,  is displayed.

Information

- For voice input, connection by Mobile network is required. Wi-Fi connection may not be available.

Switching keypad types

- 1 While the keypad is displayed, 
- 2 "3x4 key ⇔ QWERTY"

Switching text input modes

- 1 While the keypad is displayed, touch and hold 
- 2 Tap a text input mode you want to use
When you switch the character input mode, the key indicator changes to the followings.
 -  : Hiragana-Kanji
 -  : Full-width Katakana
 -  : Half-width Katakana
 -  : Full-width Alphabet
 -  : Half-width Alphabet
 -  : Full-width Numeric
 -  : Half-width Numeric

Information

- Alternatively, tap  to switch the input mode in the order of "Half-width Alphabet" → "Half-width Numeric" → "Hiragana-Kanji".
- Depending on application or function you use, keys other than ones shown in Step 2 may be displayed.

Using Wildcard Prediction

Wildcard Prediction is a function to narrow down conversion options by entering numbers of the reading of word etc.

- It is available when Word Prediction and Wildcard Prediction are set to ON.

Example: Entering "東京都"

1 When the keypad is displayed, enter "と" "う"

2 Tap  4 times

"とう○○○○" is displayed in the entry field and "東京都" is displayed in the predictive conversion options.

To change the numbers of reading

Tap  / .

3 "東京都"

Entering with Samsung keyboard

In Samsung keyboard, there are two types keypads: "Qwerty", "3x4 keyboard". To switch keypad, perform the following operations.


- Entering Japanese is not available.

1 While displaying keyboard , 

2 "Portrait keyboard types" →
"Qwerty"/"3x4 keyboard"

■ Qwerty

It is a keypad whose alignment is the same as a PC keyboard.

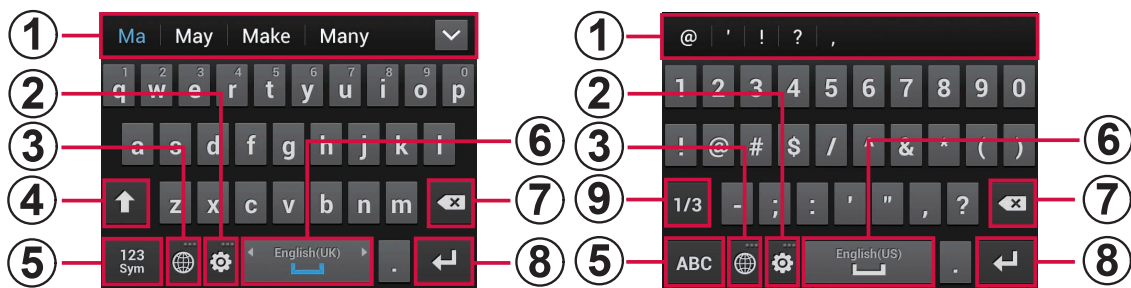

Half-width alphabet input Half-width number/symbol input

- ① When Predictive text is enabled, entry options appear. Tap an option to enter the characters.
 - Tap  to display predictive conversion options/ usual conversion options in full screen. To return to the previous display, tap .
 - Symbol list appears depending on the operating status.
- ② Perform displayed key operations.
 - Touch and hold to display the following icon menu. Key displays vary depending on the selected icon menu.
 -  : Switch to voice input.
 -  : Switch to the handwriting keyboard.
 -  : Display clipboard to paste texts etc.

 : Display Samsung keyboard setting menu.

- ③ **Switch language each time you tap.**
 - When multiple languages are set for Input language (P.121), you can display them.
 - Touch and hold to display a language list.
- ④ **Switch upper/lower case character.**
 -  : Lower case input
 -  : Capitalize the first letter
 -  : Uppercase input
- ⑤ **Switch input mode to Half-width alphanumeric/symbol.**
- ⑥ **Enter space.**
 - If multiple languages are set in Input language (P.121), drag left and right on the key while in half-width alphabet entry mode so that you can switch language.
- ⑦ **Delete characters, symbols, etc. to the left of the cursor.**
- ⑧ **Insert line feeds.**
 - When  appears, tap to move the cursor to the next entry field.
 - When  /  appears, tap to search.
- ⑨ **Switch between Half-width symbol/number and emoticon.**



Information

- For voice input, connection by Mobile network is required. Wi-Fi connection may not be available.

■ 3x4 keyboard

It is a keypad whose entry method is similar to one of general mobile phone (multi-tap type). Tap a key assigned character you want to enter several times until the target character is entered.

- To enter number or symbol, tap a key once.
- To enter Half-width alphabet with Predictive text ON, tap a key assigned a character you want to enter one by one to display word options in the predictive conversion options.

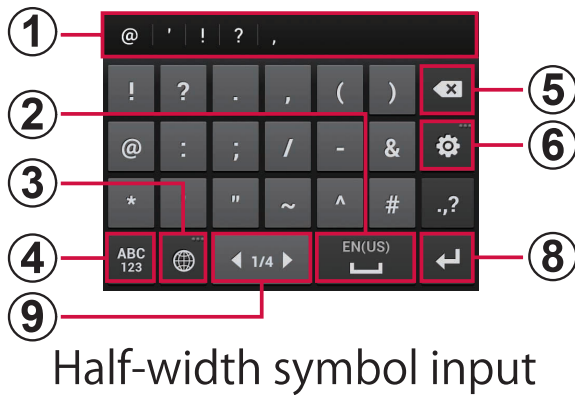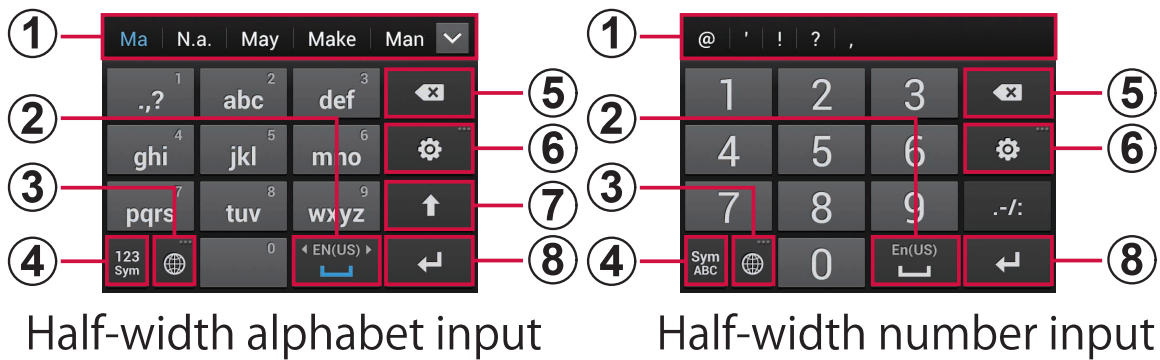

- ① When Predictive text is ON, entry options appear. Tap an option to enter the characters.
 - Tap to display predictive conversion options/ usual conversion options in full screen. Tap to return the previous display.
 - Symbol list appears depending on the operating status.

- ② **Enter space.**
 - If multiple languages are set in Input language (P.121), drag left and right on the key while in half-width alphabet entry mode so that you can switch language.
- ③ **Switch language each time you tap.**
 - When multiple languages are set for Input language (P.121), you can display them.
 - Touch and hold to display a language list.
- ④ **Switch input mode to Half-width alphabet/Half-width number/Half-width symbol.**
- ⑤ **Delete characters, symbols, etc. to the left of the cursor.**
- ⑥ **Perform displayed key operations.**
 - Touch and hold to display the following icon menu. Key displays vary depending on the selected icon menu.
 -  : Switch to voice input.
 -  : Switch to the handwriting keyboard.
 -  : Display clipboard to paste texts etc.
 -  : Display Samsung keyboard setting menu.
- ⑦ **Switch upper/lower case character.**
 -  : Lower case input
 -  : Capitalize the first letter
 -  : Uppercase input
- ⑧ **Insert line feeds.**
 - When  appears, tap to move the cursor to the next entry field.
 - When  /  appears, tap to search.
- ⑨ **Switch to Half-width symbol or emoticon.**


Information

- For voice input, connection by Mobile network is required. Wi-Fi connection may not be available.


Input by handwriting

Tap **T** on the Samsung Japanese keypad or Samsung keyboard to display handwriting input keypad.

- When handwriting keyboard is displayed from Samsung keyboard, you cannot enter Japanese characters.

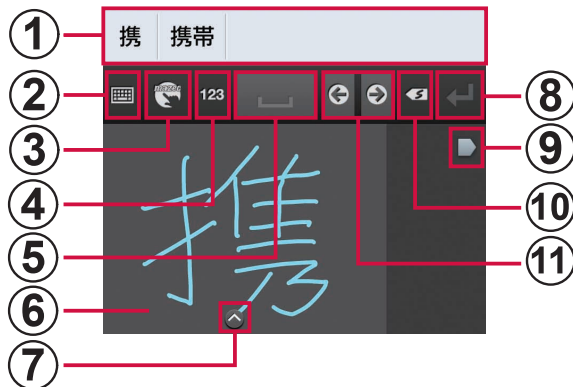

Handwriting input keypad
(Samsung Japanese keypad)

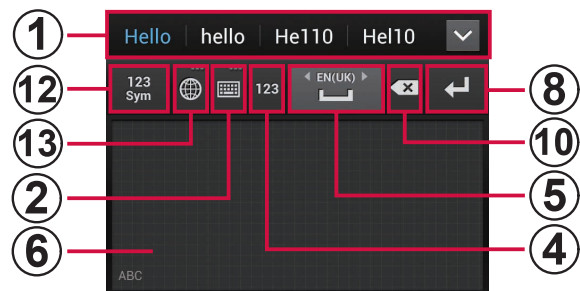

Handwriting input keypad
(Samsung keyboard)

- Display word suggestions. Tap an option to enter text.**
- Switch to Samsung Japanese keypad or Samsung keyboard.**
 - When you switch to the handwriting input keypad from Samsung keyboard, the following icon menu is appeared by touching and holding. Displayed key differs depending on selected icon menu.
 - :Switch to voice input
 - :Switch to Samsung keyboard
 - :Display clipboard and paste text etc.
 - :Display setting menu of Samsung keyboard
- Display menu, switch character entry mode, set Mushroom or 7notes with mazec-T for SAMSUNG (P.123).**
- Switch character entry mode.**

- ⑤ **Enter spaces.**
 - If handwriting input keypad is displayed from Samsung keyboard and multiple languages are set in Input language (P.121), drag left and right on the key to switch language.
- ⑥ **Drag on entry area to enter characters.**
- ⑦ **A list for recognized candidate characters for a handwritten character appears. Select a character to change candidate for entry.**
- ⑧ **Insert line feeds.**
- ⑨ **Tap to enter next character or display characters you have already entered.**
- ⑩ **Delete entered characters.**
 - When you switch to the handwriting input keypad from Samsung Japanese keypad, you can delete characters displayed in the character entry area one by one each time you tap. Touch and hold to select  /  to delete last entered character in the entry area/ all characters in the entry area.
- ⑪ **Move the cursor left or right.**
- ⑫ **Display a list of half-width number/symbol/emoticon.**
- ⑬ **Switch language each time you tap.**
 - If multiple languages are set in Input language (P.121), you can display language.
 - Touch and hold to display a language list.

Selecting/Copying/Cutting/ Pasting text

1 While the keyboard is displayed, touch and hold entered character string

 / ,  / , etc. appears. Drag  / ,  / , etc. to move the cursor.

2 Select icon to use

Icon	Description
 / 	Select all entered characters.
 / 	Cut out selected character string.
 / 	Copy the selected character string.
 / 	Paste copied/cut character string.
	Tap "Clipboard" to display clipboard.

Information

- In horizontal view display, the display may be different.
- For some applications, the function may not be available or there may be unavailable functions. And display of icon may be different or icon other than ones in Step 2 may be displayed.
- Touch and hold an entry field in which any characters are not entered to display a menu so that you can use "Paste" or "Clipboard" (For some applications, it may be unavailable).

Setting character entry/ conversion function

Setting Samsung Japanese keypad

You can set entry operations when entering characters using Samsung Japanese keypad, register to the user dictionary, etc.

1 From the Home screen,  → "Settings" → "Language and input" →  on "Samsung Japanese keypad"

2 Tap an item to set

Item	Description
Software Keyboard	
Sound on Key Press	Set whether to enable entry sound when a key is tapped.
Vibrate on Key Press	Set whether to vibrate the terminal when a key is tapped.
Key Preview	Set whether to display entering character in popup when a key is tapped.
Auto Capitalization	Set whether to sentence case automatically when alphabet is entered.
Keyboard Type	Set keyboard type.
Voice Input	Set whether to enter characters by voice sound.

Item	Description
Software Keyboard	
Handwriting input	Set whether to enter characters by handwriting.
3x4 Keypad	
Flick Input	Set whether to enter characters by flicking when keyboard is set to "3x4 Keypad". When ON is set, the popup indicating available characters when you touch the key appears. Enter a character by flicking in the indicated direction (It is available only when Japanese is set).
Flick Sensitivity (low ⇔ high)	Adjust the flick sensitivity for entering characters by flicking.
Toggle Input	Set whether to enable toggle input for entering characters by flicking keys.
Auto Cursor Movement	Set wait time of automatic cursor movement.

Item	Description
Conversion	
Input Word Learning	Set whether to save a phrase confirmed at conversion to the learning dictionary.
Word Prediction	Set whether to predictive conversion ON.
Typing Error Correction*	Set whether to display correction options in the conversion options field when there is a wrong entry.
Wildcard Prediction*	Set whether to use wildcard prediction (P.107).
Auto-spacing	Set whether to enter space automatically when you select prediction in alphabet input mode.
Lines of Candidate Area	Set number of lines of candidate area.
External Application	
Mushroom	Use mushroom applications for text input.

Item	Description
Dictionary	
Japanese User Dictionary	Register words etc. to Japanese user dictionary.
English User Dictionary	Register words etc. to English user dictionary.
Clear Learning Dictionary	Delete the contents of learning dictionary.
About IME	
iWnn IME for Samsung	Check version of Samsung Japanese keypad.

* It is unavailable when the predictive conversion is set to OFF.

Setting Samsung keyboard

You can set entry operations when entering characters using Samsung keyboard.

1 From the Home screen,  → "Settings" → "Language and input" →  on "Samsung keyboard"

2 Tap an item to set

Item	Description
Portrait keyboard types	Switch keypad types.
Input language	Set input language.
Predictive text	Set Predictive text ON/OFF.
Continuous input ^{*1}	Set whether to enter characters continuously by dragging a desired key on the keyboard.
Keyboard swipe	Set whether to switch the character input mode by flicking left and right on the keypad when using Qwerty/3x4 keyboard.
Handwriting	Set handwriting input to ON/OFF.

Item	Description
Voice input ^{*2}	Set whether to enter characters by voice sound.
Auto capitalization	Set whether to sentence case automatically.
Auto-punctuate	Set whether to enter a period by tapping the space key twice when using Qwerty.
Character preview	While using Qwerty Keypad, set text preview.
Key-tap vibration	Set whether to vibrate when a key is tapped.
Key-tap sound	Set whether to sound entry sound when a key is tapped.
Tutorial	Display Tutorial of Samsung keyboard to check operation.
Reset settings	Reset all settings.

*1 It is unavailable when Predictive text is set to OFF.

*2 Available when "Google voice typing" (P.299) is marked.

Information

- Tutorial for Samsung keyboard is displayed in English.

Setting Google voice typing

1 From the Home screen,  → "Settings" → "Language and input" →  on "Google voice typing"

2 Tap an item to set

Item	Description
Select input languages	Select language to input with voice sound.
Block offensive words	Set whether to hide offensive texts recognized by voice input.

Setting up for 7notes with mazec-T for SAMSUNG

1 While displaying handwriting input keypad (Samsung Japanese keypad),  → "Settings"

2 Tap an item to set

Item	Description
Auto Scroll	Set whether to scroll automatically when writing characters to the right end of the entry area.
Auto Scroll Input Delay	Set interval time before scrolling automatically.
Auto Scroll Area Width	Set width of area to judge auto-scrolling
Enable Fullscreen Mode	Set whether to display dedicated entry screen when performing handwriting input in landscape mode.
Auto Feed (for Stroke)	Set whether to fix stroke automatically when dashing off characters.
Auto Feed Input Delay*	Set interval time for fixing stroke automatically when dashing off characters.
Add to User Dictionary	Register/edit words, etc.
Show User Dictionary	Display a list for registered word etc.
Clear History	Delete all automatically learned fixing candidate.
Online Help	Display Help for 7notes with mazec-T for SAMSUNG.

Item	Description
7notes with mazec-T for SAMSUNG	Check version of 7notes with mazec-T for SAMSUNG.
Legal Notices	Display copyrights information.

* Settings is not available when Auto Feed (for Stroke) is set to OFF.

docomo Palette UI

Home screen



Home screen (example)
"ひつじのしつじくん® (Butler Sheep)"
©NTT DOCOMO

- ① The current position of the Home screen is displayed. You can toggle the screens by scrolling/flicking left and right.
- ② Widget (e.g.: Search, iチャンネルウィジェット (i-Channel Widget))
 - Tap to activate or operate widget (application located on the Home screen).

- ③ Machi-chara (eg. ひつじのしつじくん (Butler Sheep))
 - Notify you of information such as mail reception or incoming call.
- ④ Shortcut
 - Tap to activate frequent-used application etc.
- ⑤ Displayed even when the home screen is switched.
 - Icons other than , shortcuts, folders and groups can be located.

Managing Home screen

Addable items on Home screen

Add shortcuts, widgets, folders, application groups, etc.

Adding shortcuts

- 1 From the Home screen, touch and hold a wallpaper in which shortcuts or widgets are not displayed
- 2 "Shortcut" → Tap an item you want to add

Adding widgets

- 1 From the Home screen, touch and hold a wallpaper in which shortcuts or widgets are not displayed

2 "Widget" → Tap an item you want to add

Icon	Widgets	Description
	Alarm	Set an alarm.
	Assistive light	Turn on light.
	Clock (digital)	Display clock.
	Clock (funky)	
	Clock (modern)	
	Contact	Allocate registered to "Contacts" application provided by Samsung to the Home screen to make calls or send mails.
	Contents Headline	Display recommended music, video, e-books, etc. in dmarket.
	docomo location information	Set service that uses location information.
	docomo Wi-Fi かんたん接続 (docomo Wi-Fi easy connection)	Connect/disconnect to/from DOCOMO public wireless LAN service "docomo Wi-Fi" or private Wi-Fi environment by tapping once.

Icon	Widgets	Description
	Dual clock (analog)	Display analog clock.
	Dual clock (digital)	Display digital clock.
	Email	Display the part of the Email Inbox.
	Gmail	Display the part of the Gmail Inbox.
	Google Search	Display Quick search. * Select widget that is suitable design for the using Home screen.
	Google Search	
	Google+ photos	Display photos uploaded to Google+.
	Google+ posts	Upload shot photo etc. to Google+.
	IC Tag/ Barcode Reader	Read IC tags and barcodes.
	iチャンネル ウィジェット (i-Channel Widget)	Display various information such as weather or news.
	Latitude	Display friend's location.

Icon	Widgets	Description
	Machi-chara	Set characters moving around freely on widgets in the Home screen.
	Mono audio	Switch ON/OFF of monaural play (P.305).
	Music player	Play music.
	Negative colors	Invert negative/positive screen display.
	Personal area	Display personal information. You can view My menu, docomo points, contractual services, charges. * Personal area is only displayed on docomo Palette UI home.
	Phonebook	Allocate contacts that are registered to "Phonebook" application provided by DOCOMO to the Home screen to make calls or send mails.
	Phonebook Select members	Display call logs for contacts that are registered to "Phonebook" application provided by DOCOMO.

Icon	Widgets	Description
	Picture frame	Display images.
	Play Store	Display recommended applications.
	S Bookmarks	Select a bookmark saved in the terminal or Google account to browse the web page.
	S Memo	Create memos out of input text and handwriting.
	S Suggest	Check/Download latest applications.
	Schedule & Memo	Display calendar to check schedule or create memo.
	Software update	Check/perform software update.
	TheNewsCafe	Display news.
	Traffic	Display traffic information or required time from the current location to destination. * It can be used at some overseas locations.
	Video player	Display video list.

Icon	Widgets	Description
	YouTube	Display recommended videos.
	診断ツール (Diagnosis tool)	Start 診断ツール (Diagnosis tool).

Information

- When "TouchWiz home" is set, available widgets are different. Also, icons of widgets may differ.

Adding folders

- 1** From the Home screen, touch and hold a wallpaper in which shortcuts or widgets are not displayed
- 2** "Folder" → Tap a folder you want to add

Information

- To delete folder, touch and hold the folder → "Delete".

Moving shortcuts, etc.

- 1 Touch and hold a widget/shortcut
- 2 Drag to the position you want to move to and release it

Deleting shortcuts, etc. from the Home screen

- 1 Touch and hold a widget/shortcut
- 2 Drag to  at the bottom of screen and release it
 - Alternatively, touch and hold a widget/shortcut you want to delete → "Delete".

Uninstalling applications/widgets

- 1 From the Home screen, touch and hold an application or widget you want to uninstall
- 2 "Uninstall" → "OK"
Uninstallation completion screen appears.
- 3 "OK"

Changing folder name

- 1 From the Home screen, touch and hold a folder you want to rename
 - Folders can be renamed are only created at "New folder".
- 2 "Edit name" → Enter folder name → "OK"

Information

- Alternatively, open a folder and touch and hold a folder name to rename.

Changing Kisekae

Set wallpaper or application list at one time.

- 1 From the Home screen, touch and hold a wallpaper in which shortcuts or widgets are not displayed → "Kisekae"
- 2 Select item → "Set"

Information

- From the Home screen,  → "Kisekae" to change.
- To delete installed Kisekae theme, on the Kisekae setting screen, select theme you want to delete → "Delete" → "Delete". You cannot delete pre-installed Kisekae themes.
- To download from Kisekae site, on the Kisekae setting screen, tap "Search". When you download contents,  appears on the status bar.

Changing wallpaper

You can change Home screen wallpaper as you like.

- 1** From the Home screen, touch and hold a wallpaper in which shortcuts or widgets are not displayed → "Wallpaper"
- 2** Select from "Gallery"/"Live wallpapers"/"Wallpaper gallery"/"Wallpapers" → **Select a wallpaper**
 - If you select Gallery, select a wallpaper and tap "Done". If size requires to be changed, drag the blue frame to change the size and tap "Done".
 - If you select Live wallpapers, select a wallpaper and tap "Set wallpaper".

- If you select Wallpaper gallery or Wallpapers, select a wallpaper and tap "Set wallpaper"

Information

- For loop display of wallpaper by scrolling/flicking the Home screen left or right, from the Home screen,  → "Wallpaper loop settings" → Mark "Wallpaper loop".

Adding home screens

1 From the Home screen, touch and hold a wallpaper in which shortcuts or widgets are not displayed → "Home screens"

- You can display Home screen list to narrow two fingers' distance on the Home screen.

2 Tap 

- Add up to 12 home screens.

Sorting home screens

1 From the Home screen, touch and hold a wallpaper in which shortcuts or widgets are not displayed → "Home screens"

- You can display Home screen list to narrow two fingers' distance on the Home screen.

- 2** Touch and hold a thumbnail of Home screen
- 3** Drag to the position you want to move to and release it

Deleting home screen

- 1** From the Home screen, touch and hold a wallpaper in which shortcuts or widgets are not displayed → "Home screens"
 - You can display Home screen list to narrow two fingers' distance on the Home screen.
- 2** Long-touch a thumbnail of the home screen you want to remove → "Delete"
 - Alternatively, you can tap  of the thumbnail of the home screen you want to remove.

Application screen

- 1 From the Home screen,  Application screen appears.



Application list screen (example)

- ① **Group**
- Manage applications by groups.
 - Tap to show/hide applications in the group.
 - The number at the right side indicates the number of applications in the group.
- ② **Application**
- If you download a new applications or update applications,  appears at the top left of each application icon.


Application list

- Some applications require subscriptions (charged) to use.

Applications in "Application" tab

■ DOCOMO Services

Icon	Application	Description
	dmenu	Shortcut application for "dmenu". You can search easily i-mode compatible contents as well as other useful contents for smart phone.
	dmarket	Activate dmarket. On dmarket, you can purchase contents such as music, videos, e-books, etc. Provide information of applications on Google Play.
	iチャンネル (i-Channel)	Use iチャンネル (i-Channel).
	i コンシェル (i-concier)	An application for using i-concier. i-concier is a service with which a mobile phone supports your life like a butler or concierge.

Icon	Application	Description
	Machi-chara	Show character on the screen. The character moves on the widget and informs you i-concier information, mail reception, incoming calls, etc.
	ドコモバックアップ (docomo backup)	This is an application for using "ケータイデータお預かりサービス (Data Security Service)" or "電話帳バックアップ (Phonebook backup)" service. You can back up or restore data such as phonebook entries.

■ Basic functions

Icon	Application	Description
	Phone	Make/receive calls or check call logs using "Phone" application provided by DOCOMO.
	Dial	Make/receive calls using the terminal's "Dial" application provided by Samsung.
	Phonebook	Manage contacts using a phonebook application provided by DOCOMO.

Icon	Application	Description
	Contacts	Manage contacts using the terminal's "Contacts" application provided by Samsung.
	SD card backup	Transfer/back up data such as phonebook, sp-mode mail, bookmark using an external storage such as a microSD card. For details, refer to P.404.
	spモードメール (sp-mode mail)	Send/Receive the mail using docomo mail address (@docomo.ne.jp). Pictogram and Deco-mail are available. Auto reception is also supported (P.198).
	Area Mail	An application to receive and view Early Warning "AreaMail".
	Disaster kit	Save/View messages on Disaster Message Board.
	Manual	The instruction manual for the terminal. You can activate desired functions from instructions.


■ Entertainment

Icon	Application	Description
	Media Player	Play music or video.
	MobileTV	Watch 1 Seg.
	Gガイド番組表 (G-guide program)	An app for viewing terrestrial and BS program schedules. Program searching via keywords and genres, 1 Seg broadcast viewing and preset recording, and remote recording from outside locations are available.
	Gallery	View/Organize still images/videos.

■ Tools

Icon	Application	Description
	Camera	Shoot still images/videos.
	Memo	Create and view memo.
	Schedule	Create/Manage schedule. Support i-concier service

Icon	Application	Description
	S Memo	Create memos out of input text and handwriting.
	S Planner	Manage schedule.
	IC Tag/ Barcode Reader	Read IC tags and barcodes.
	Calculator	Calculate.
	Clock	Use alarm, World clock, Stop watch, Timer or Desk clock.
	Dictionary	Search a word etc. using the dictionary.
	7notes with mazec-T	Create memo quickly by handwritten input.
	ChatON	Enjoy group chat with this application.
	S Suggest	Search/download latest applications recommended by Samsung.
	Voice recorder	Record voice sound.
	My files	View/Manage data such as still images, videos, music, etc.

Icon	Application	Description
	Polaris Office 4.0	View/Edit/Create an Office document.
	AllShare Play	Share and play/manage contents in various devices via the internet.
	More services	Download useful applications.
	Samsung Apps	Download useful applications or update installed applications.

■ Osaifu/Shopping

Icon	Application	Description
	Osaifu-Keitai	It allows you to pay money only by holding the terminal over an IC card reader in stores etc.
	iD設定アプリ (iD setting application)	Make settings for use of electronic money, iD.
	ToruCa	Acquire, display, search, or refresh ToruCa.

■ Settings

Icon	Application	Description
	Settings	Make the terminal settings.

Icon	Application	Description
	遠隔サポート (Remote support)	An application to use "Smartphone Anshin Remote Support". "Smartphone Anshin Remote Support" is a service with which a Call Center staff helps your operation checking your terminal's screens remotely.
	Flash Player Settings	Perform Adobe® Flash® Player settings.

■ Google

Icon	Application	Description
	Email	Set Email account to send/receive emails.
	Gmail	Send/Receive emails via Gmail.
	Messaging	Send/receive SMS.
	Talk	Chat via Google Talk.
	Internet	Web browser application.
	Search	Search various information by the quick search box.

Icon	Application	Description
	Downloads	Check downloaded or downloading data information.
	Play Store	Download applications from Google Play.
	Music player	Play music.
	YouTube	Play/Post videos.
	Play Movies	You can purchase videos from Google Play.
	Video player	Play videos.
	Maps	Check current location or search a destination with Google Maps.
	Navigation	Check route to the destination by Google Maps Navigation.
	Places	Search information such as shops etc. around the current location.
	Latitude	Check locations on the map with friend or send mail.
	Google +	Google SNS is available.

Icon	Application	Description
	Messenger	Invite multiple friend groups to one simple group chat to enjoy with all members on one page.

Applications in "Recommends" tab

Icon	Application	Description
	Anshin Scan	Protect the terminal from the viruses. Detect virus hidden in installed applications or microSD card.
	Book Store MyShelf	View e-books bought via dmarket book store.
	HighlightCam	An application for analyzing shot videos or photos to create automatically edited videos. You can use templates or BGM suitable for various scenes, and you can also upload created videos to SNS easily.

Icon	Application	Description
	地図アプリ (Map application)	Functions such as 地図 (Map), お店や施設検索 (Shop and facility search), ナビ (Navigation), 乗換 (Transfer function), 訪れた街 (Visited places) support your outing.
	Name card creator	Create original name card to display on the My profile field in the Phonebook application provided by DOCOMO.
	ドコモ海外利用 (docomo international roaming)	Support overseas packet communication. Make easy settings for data roaming or network operator setting when using Global Pake-hodai (flat rate service for packet communication overseas).

Information

- In the "Recently" group in "Application" tab, up to 8 recently-used applications are displayed. In the "Download Application" group, downloaded applications are displayed.
- Tap  to return to the Home screen.
- When an application has notification information, number (number of notifications) may be displayed on the icon.

Managing applications

Adding shortcuts to Home screen

- 1 On the application list screen, touch and hold an application you want to add to the Home screen
- 2 "Add"

Uninstalling applications

- 1 On the Application screen, touch and hold an application you want to uninstall
- 2 "Uninstall" → "OK"
Uninstallation completion screen appears.
- 3 "OK"

Moving applications

- 1 On the Application screen, touch and hold an application you want to move
- 2 Drag to the position you want to move to and release it
 - Alternatively, touch and hold an application and tap "Move" → Select a location to move the application to other group.

Managing groups

Adding groups

- 1 On the Application list screen,  → "Add group"
- 2 Enter group name → "OK"

Sorting groups

- 1 On the Application list screen, touch and hold a group label
- 2 Drag to the position you want to move to and release it

Editing group name

- 1 On the Application list screen, touch and hold a group label
- 2 "Edit name" → Enter group name → "OK"

Information

- "Recently", "DOCOMO Services", and "Download Application" groups cannot be renamed.

Changing group color

- 1 On the Application list screen, touch and hold a group label
- 2 "Edit label" → Select label color

Adding groups to Home screen

- 1 On the Application list screen, touch and hold a group label
- 2 "Add"

Deleting groups

- 1 On the Application list screen, touch and hold a group label
- 2 "Delete" → "OK"

Information

- "Recently", "DOCOMO Services", and "Download Application" groups cannot be deleted.

Searching applications

- 1** On the Application list screen,  → "Search"
- 2** Enter application name you want to search → Tap searched application
 - To search installed applications, on the search screen,  → "Settings" → "Searchable items" → Mark "Apps".

Switching Application screen

- 1 On the Application list screen,  → "List format"/"Tile format"

Installing "Recommends" applications

Applications recommended by DOCOMO are displayed in the "Recommends" tab. To download applications, tap an application icon to display the download screen and follow the onscreen instructions.

- Downloaded application appears on the "Download Application" group in the "Application" tab.
- Tap "もっとアプリを見る (More apps)" in the "Recommends" tab to activate Browser to display the top of dmenu.

Home screen information

You can view the descriptions or instructions, etc. about docomo PaletteUI.

- 1 From the Home screen,  → "Help"

Version information

- 1 On the Application list screen, 
- 2 "Application info"
You can view the provider/version information of docomo Palette UI.

Calling

Making a call

- 1 From the Home screen, "Phone" → "Dial"
- 2 Enter a phone number of the other party
 - Enter a city code even when the other party is in the same city.



Dial screen

- ① **Recent calls:** Display call log screen (P.167).
- Favorites:** Contact list added to Favorites appears. (P.190).
- Dial:** Dial screen appears.

- ② **Phone number entry field**
Entered phone number is displayed.
- ③ **Call key**
Call to an entered phone number.
- ④ **Key for registering to phonebook**
Register entered phone numbers to phonebook.
- ⑤ **声の宅配便 (Koe-no-Takuhaibin) key**
Record message (P.174).
- ⑥ **Delete key**
Delete a number at the far right. To delete all numbers entered, touch and hold the key.
- ⑦ **Phonebook key**
Open Phonebook.

3 Tap

A call screen appears.

4 When the call ends, "End call"

Information

- Video call is not available for this terminal.
- To show/hide the caller ID per call, enter prefix "186" (show) / "184" (hide) before the phone number. You can set to show/hide in "Caller ID notification" (P.174) in advance.
- Alternatively, from the Home screen,  → Tap "Dial" to activate application provided by Samsung and then tap "Keypad" to make a call. However, available functions etc. of "Phone" application differs from the ones provided by DOCOMO.

Emergency call

Emergency call	Phone number
Police	1 1 0
Fire and ambulance	1 1 9
Marine emergency	1 1 8

Information

- This terminal supports "Emergency report location notification". When calling to 1 1 0, 1 1 9, or 1 1 8, the information of where you are calling from is automatically informed to the police or other agencies. Due to the location where you call or the signal status, the location information may not be informed correctly. If the location information is informed, the agency's name is displayed on the Home screen. Also, if you call with "184" attached or other non-notification functions, the location information and telephone number will not be informed. However, if the agency consider it is necessary to know those information due to lifesaving, the agency may retrieve your information regardless of your current settings. Besides, the introduced region or period of "Emergency report location notification" varies from each agencies.

Information

- When calling to 110, 119 or 118 from the terminal, inform them that you are calling from a mobile phone and give your phone number and your current location precisely for checking callback from the police/fire department.

To make sure that you are not cut off during the call, do not move during the call and do not turn OFF the phone after the call, but keep it ON for about 10 minutes.

- For some areas you are calling from, you are not connected to the local police or fire department.
- In Japan, when docomo mini UIM card is not inserted to the terminal, the emergency numbers of 110/119/118 are not available on the PIN code entry screen or during PIN code lock/PUK lock.

Menu of dial screen

Tap  to display the following items.


Item	Description
Caller ID notification*	Set whether to notify/not to notify the caller ID.
International call*	Make an international call (WORLD CALL) (P.172).
Add 2-sec pause*	Enter ",". Enter a phone number, pause (,) and numbers consecutively and call. The call is connected and the touch-tone signals are automatically sent after about 2 seconds.
Add wait*	Enter a wait ";". Enter a phone number, wait (;) and numbers consecutively and call. When the call is connected, tap "Yes" and the touch-tone signals are sent.
Send SMS	→ P.199
Call settings	→ P.174
Set start-up screen	Set the displayed screen as a default when tapping "Phone" on the Home screen.

* Appears on the dial screen after entering phone number.

Receiving a call

1 A call is received

A reception screen appears.

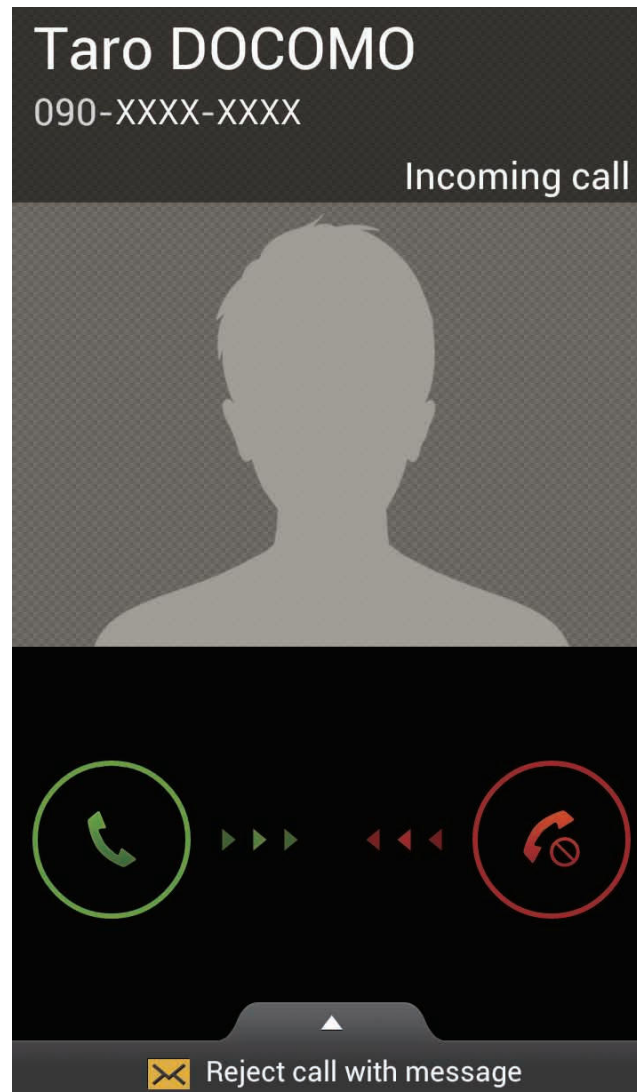

Incoming call screen

- If call is received when you are at out of service area, incoming call notification arrived via SMS message.

2 Drag to outside of the circle

A call screen appears, calling starts.

To reject a call

Drag  to outside of the circle.

To reject a call and inform the caller of the reason of the rejection by SMS

Drag "Reject call with message" at the bottom of the screen upward and tap "Send" of reject message.

- Tap "Create new message" to create SMS.

Information

- You can change the reason of rejection in "Set reject messages" (P.182).
- To stop ringtone sounding or vibration, press  (volume key).

Using Stereo Headset with Microphone


When you connect Stereo Headset with Microphone (sample), you can answer an incoming call by pressing the switch of Stereo Headset with Microphone.

Attaching Stereo Headset with Microphone

- 1 Insert the connecting plug of Stereo Headset with Microphone to the headphone connection jack of the terminal



appears on the status bar.

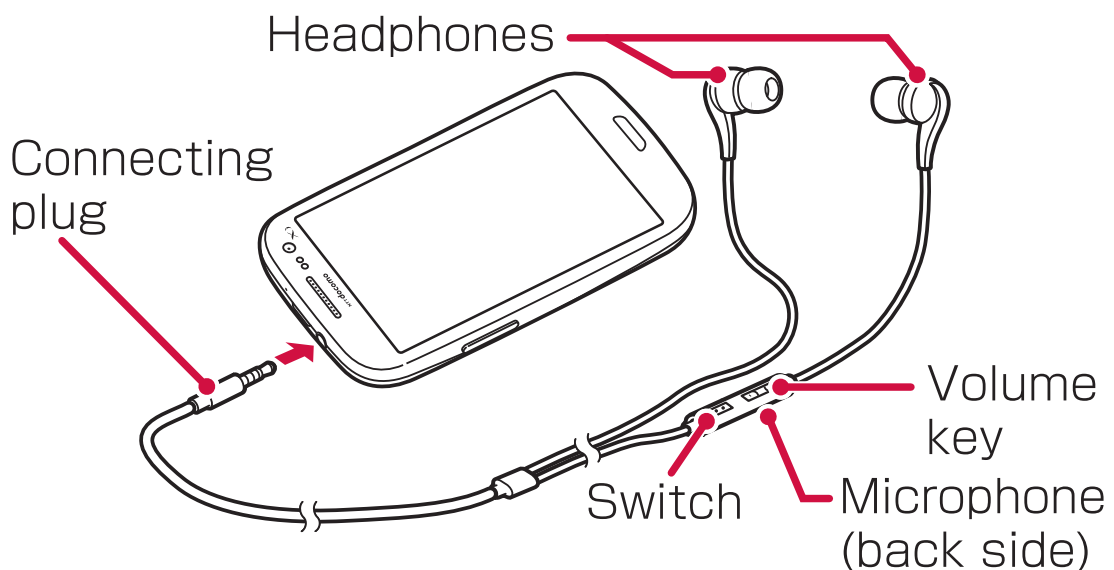

Information

- Firmly insert the connecting plug to the end. If the connecting plug stays on the way, sound may not be heard.

Receiving a call using Stereo Headset with Microphone

1 When a call is received, press the switch of Stereo Headset with Microphone

You can talk when the call is connected. Your voice is sent to the other party from the microphone of Stereo Headset with Microphone.

To reject a call reception

While receiving a call, press the switch of Stereo Headset with Microphone for 1 second or longer and release it.


2 When the call ends, press the switch again

Information

- Even when Stereo Headset with Microphone is connected to the terminal, ringtone and alarm are heard from the terminal.
- Pressing the volume key while a call is incoming stops the ringtone or vibration. Pressing the volume key during a call adjusts voice sound volume (listening volume) of the other party.

Operation during a call

- 1 A call is received**
A reception screen appears.
- 2 Drag  to outside of the circle**
A call screen appears, calling starts.

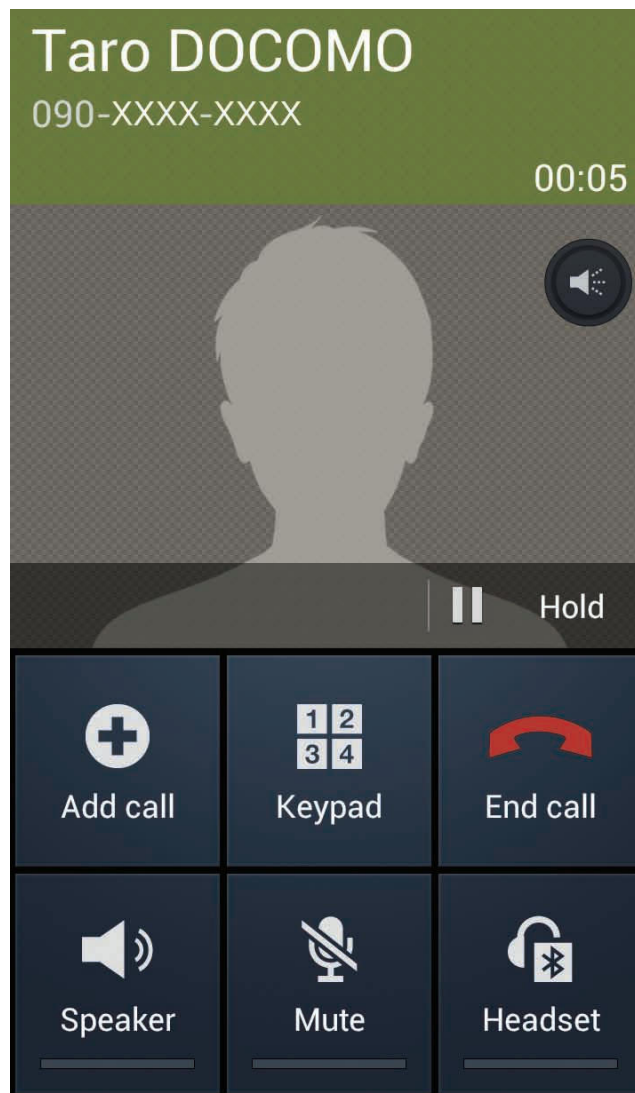

Call screen

You can operate the following operations on the call screen.

Item	Description
	Enable/disable the maximum volume by each tapping. This operation can be available when "Use extra vol. for calls" (P.179) is marked.
Hold ^{*1} / Unhold ^{*1}	Hold call/Cancel the hold.
Add call ^{*1}	Make a second call.
Keypad	Display the keypad to send touch-tone signals.
End call	End call.
Speaker	Output the other party's voice from the speaker to call hands-free.
Mute	Mute your voice not to be heard by the other party.
Headset	Connect with Bluetooth device to call hands-free.
Contacts ^{*2}	Display registered information list of Contacts.
Memo ^{*2}	Start the S Memo.

Record voice ^{*2} / Stop recording ^{*2}	You can record/stop recording your current call. • Recorded voice data can be played with Voice recorder (P.401).
In-call sound EQ ^{*2}	Set sound quality during a call.

*1 Only "Call Waiting" subscribers can operate.

*2 Tap  to display.

Information


- To adjust the volume of the other party's voice (call volume), press  (volume key) during a call.
- The call screen is turned off automatically when the screen is covered by making the terminal close to your face (except for attaching headset, etc.) or about 30 seconds are passed with no operation. To display the call screen, press  / .

Call logs

In Recent calls, you can check logs of dialed calls, received calls, missed calls by a list.

1 From the Home screen, "Phone" → "Recent calls"

Recent calls screen appears.

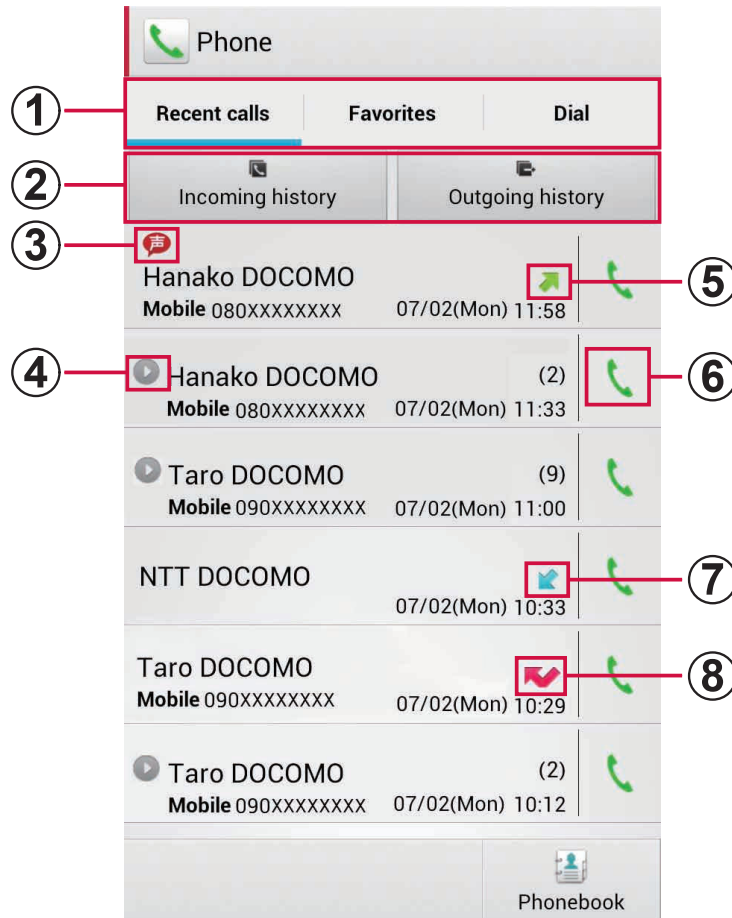

Recent calls screen

- ① **Recent calls list:** Recent calls list is displayed.
Favorites: contacts list added to the Favorites is displayed (P.190).
Dial: Display dial screen (P.155).
- ② **Switch logs**
Switch display between Incoming history and Outgoing history. To return to the original display, tap "Display all history".
- ③ **Status icon for incoming/outgoing**
 -  :Call with Koe-no-Takuhaibin (P.174)
 -  :Call with the caller ID (dial with "186")
 -  :Call without the caller ID (dial with "184")
 -  :Outgoing international call
 -  :Incoming international call
- ④ **Multiple histories exist**
Displayed when multiple calls in the same day, to/from the same party, in the same type of log (incoming call/outgoing call) exist.
- ⑤ **Call log**
- ⑥ **Call key**
- ⑦ **Received log**
- ⑧ **Missed call history**
Appeared for missed call, call on the reject list, reject call.

2 Tap the number you want to call

Log details screen appears.

- When you tap the party with ④ displayed, a list of history appears. Tap a history from the list, a history detail screen appears.

3 "Call"

Information

- If you tap "Add Phonebook" on the log details screen of the other party who is not saved in Phonebook, you can newly add/overwrite a phone number to Phonebook.
- In the call list screen, select other party who is saved in Phonebook and tap "Profile" in the log details screen to display a profile screen for Phonebook. Tap "Communication" in the log details screen to check the call logs or logs for sp-mode mail/SMS.
- You can back up call logs using SD card backup (P.197).
- Alternatively, from the Home screen,  → Tap "Dial" to activate "Dial" application provided by Samsung, and then tap "Logs" to check incoming/outgoing call log. However, available function etc. of the application differs from "Phone" application provided by DOCOMO.

Menu on Recent calls/Log details screen

Tap  to display the following items.

Item	Description
Delete all ^{*1}	Delete call logs.
Search location ^{*1}	Check current location of the party using imadocokantan search.
Call settings ^{*1}	→ P.174
Set start-up screen ^{*1}	Set the displayed screen as a default when tapping "Phone" on the Home screen.
Caller ID notification ^{*2}	Set whether to notify/not to notify the caller ID.
International call ^{*2}	Make an international call (WORLD CALL) (P.172).
Add 2-sec pause ^{*2}	Enter ",". Enter a phone number, pause (,) and numbers consecutively and call. The call is connected and the touch-tone signals are automatically sent after about 2 seconds.
Add wait ^{*2}	Enter a wait ";". Enter a phone number, wait (;) and numbers consecutively and call. When the call is connected, tap "Yes" and the touch-tone signals are sent.

Item	Description
Share ^{*3}	Send contacts via Bluetooth or by mail attachment.
Delete ^{*3}	Delete contacts.
Set ringtone ^{*3}	Set individual ringtone.
Join/ Separate ^{*3}	Link related contacts such as family, company, etc. to put into one joined contact or separate the joined contact.
Sync. deleted items ^{*4}	Update Recent calls of "Phonebook" application provided by DOCOMO, the sent/received log of sp-mode mail and SMS application to the latest information.

*1 Appears just in Recent calls screen.

*2 Appears just in the log details screen of other party who is not saved in Phonebook.

*3 Appears just when tapping "Profile" in the log details screen of other party who is saved in Phonebook.

*4 Appears just when tapping "Communication" in the log details screen of other party who is saved in Phonebook.

Making an international call (WORLD CALL)

WORLD CALL is an international telephone service that you can use inside Japan with DOCOMO terminal.

If you subscribed to FOMA service, WORLD CALL service is subscribed as well at subscription to FOMA service (Excluding those who decline to use this service). For using overseas, see after P.415.

- Depending on the network operator, the caller ID may not be shown/displayed properly. In this case, calls cannot be made from the Logs.

For WORLD CALL, contact "Docomo Information Center" provided on the last page of this manual.

- 1** From the Home screen, "Phone" → "Dial" → "0", "1", "0" → Country code → Area code (city code) → Enter a phone number of the other party
 - Please omit the prefix "0" in the area code (city code). However, "0" may be required to dial to some countries or areas such as Italy.

- 2** Tap 

- 3** When a call ends, "End call"

Information

- When "0" is touched and held to enter prefix "+" before "Country code-Area code (City code)-phone number", international dial assist screen appears when making a call. When you tap "Call by WORLD CALL", "+" is changed to an international access code "009130010", and you can make an international call.

Call settings


You can set functions for calling from the Home screen, "Phone" →  → "Call settings".

Item	Description
Network service	
Koe-no-Takuhaibin	Koe-no-Takuhaibin is a service of taking voice messages for you.
Voice mail service	The service takes voice message of the other party for you if you cannot answer an incoming call.
Call forwarding service	The service forwards a call if you cannot answer an incoming call.
Call waiting	The service which allows you to put the current call on hold and answer a second call or make a call to another party.
Caller ID notification	Notify your phone number on the screen display of other party when making a call.

Item	Description
Network service	
Nuisance call blocking service	Save caller's number and set call rejection.
Caller ID display request service	Activate/Deactivate Caller ID request.
Second call settings	Activate/Deactivate Set arrival.
Call notification	Activate/Deactivate missed call notification.
English guidance	Activate/Deactivate English guidance.
Remote operation settings	Activate/Deactivate Remote control.
Public mode (power OFF) settings	While the terminal is OFF or in Airplane mode, a guidance message indicating that the receiver is in a place where power should be turned off is heard on the caller's terminal and then the call ends.

Item	Description
Roaming settings	
Restricting incoming calls	Start/Stop barring incoming call during International roaming.
Incoming notification while roaming	Activate/Deactivate Missed call notification for roaming.
Roaming guidance	Activate/Deactivate Roaming guidance.
International dial assist	
Automatic conversion	Set ON/OFF of Automatic conversions. When it is set to ON, an international dial assist screen appears for calls with "+" entered at the beginning of the phone number. Tap "Call by WORLD CALL" to convert "+" to an international access code registered in "International prefix".
Country code	Register/Add country code for international call.
International prefix	Set prefix international access code for international call.

Item	Description
Roaming settings	
Network service	
Remote operation (charged)*1*2	Set Remote control.
Caller ID request (charged)*1*2*3	Set Caller ID request.
Roaming call notification (charged)*1*2*3	Set missed call notification for roaming.
Roaming guidance (charged)*1*2*3	Set Roaming guidance.
Voice mail (charged)*1*2*3	Set Voice mail.
Call forwarding (charged)*1*2*3	Set Call forwarding.
Call rejection	
Auto reject mode	Set ON/OFF of Auto reject mode.
Auto reject list	Set the number when auto reject mode is set to ON. → P.183
Set reject messages	→ P.182

Item	Description
Call alert	
Call vibrations	→ P.181
Call status tones	→ P.181
Alerts on call	→ P.181
Call answering/ending	
Answering key	Set whether to answer call by pressing  .
The power key ends calls	Set whether to end call by pressing  .
Auto screen off during calls	Set whether to turn the screen display off when the screen is covered by your face during a call.

Item	Description
Accessory settings for call	
Automatic answering	Set whether to answer automatically while connecting to a headset etc.
Automatic answering timer	Set response time for auto-answering when "Automatic answering" is marked.
Outgoing call conditions	Set whether to make a call from a Bluetooth headset even when screen is locked.
Use extra vol. for calls	Set whether to raise sound volume to maximum during a call. Mark to display  on the calling screen (P.164).
In-call sound EQ settings	
In-call sound EQ	Set in-call sound quality.
Personalized EQ	Customize to set in-call sound quality to suit to user.

Item	Description
Increase volume in pocket	Set whether to increase volume of ringtone when there is incoming call while the terminal is in a pocket, bag, etc.
Additional settings	
Auto area code	Set whether to add an area code automatically.
Additional service	
Register USSD	When a new network service is introduced by DOCOMO, you can use the service by registering it in the menu.
Register reply message	You can record reply messages applicable to codes (USSD). Reply messages are returned from the service center when the additional services are executed.

*1 Select when setting and operating overseas.

*2 When using overseas, fee from the overseas country to Japan is required.

*3 It is necessary to set Remote operation settings beforehand.

Notifying the call status by sound

1 From the Home screen, "Phone" →  → "Call settings" → "Call alert"

2 Tap an item you want to set

Item		Description
Call vibrations	Answer vibration	Set whether to vibrate the terminal when the other party answers your call.
	Call-end vibration	Set whether to vibrate terminal when "End call" is tapped.
Call status tones	Call connect tone	Set whether to sound start calling tone.
	Minute minder	Set whether to activate call duration notification on a minute-by-minute basis.
	Call end tone	Set whether to sound stop calling tone.
Alerts on call		Set ringtone for sounding when alarm or SMS is received, etc.

Registering reason of rejection for sending via SMS when rejecting call

This terminal can reject a reception of call and inform the caller of the reason of rejection by SMS. Up to 6 rejection messages can be registered.

- By default, 5 rejection messages are registered.

1 From the Home screen, "Phone" →  → "Call settings" → "Set reject messages"

To edit registered rejection message

Tap a rejection message to edit → Edit the rejection message → Tap "Save".

To delete a rejection message

 → Mark the rejection message you want to delete/Mark "Select all" → "Delete".

2 "Create" → Enter a rejection message → "Save"

Information

- For rejection message, up to 70 Full-width characters (up to 160 Half-width alphanumeric characters) can be entered.

Rejecting call receptions from specified phone number

You can register the phone number you want to reject the calls. Up to 100 phone numbers can be registered.

- 1** From the Home screen, "Phone" →  → "Call settings" → "Call rejection" → "Auto reject list"

To reject calls without the caller ID

Mark "Private number".

To edit registered phone number

Tap the phone number you want to edit → Edit the phone number → Tap "Save".

To delete a registered phone number

 → Mark the phone number you want to delete/Mark "Select all" → Tap "Delete".

- 2** "Create"

- 3** Enter the phone number you want to reject

- To quote a phone number from Logs or Phonebook,  → "Logs"/"Contacts" → If "Contacts" is selected, select an application → Tap the number you want to register.

- 4** "Match criteria" → Tap a sorting rule

- 5** "Save"

- Unmark check on saved phone number to cancel reject call.

Information

- To reject saved phone number, turn on "Auto reject mode" (P.177).

Phonebook

Registering to Phonebook

Manage various contact information such as name, phone number or mail address using "Phonebook" application provided by DOCOMO.


1 From the Home screen, → "Phonebook"

By default, contacts list screen appears.

2 "Register" → Select saving location

- If you do not set up Google account, a saving location selection screen does not appear. Entered data is saved to docomo account.

Saving to docomo account

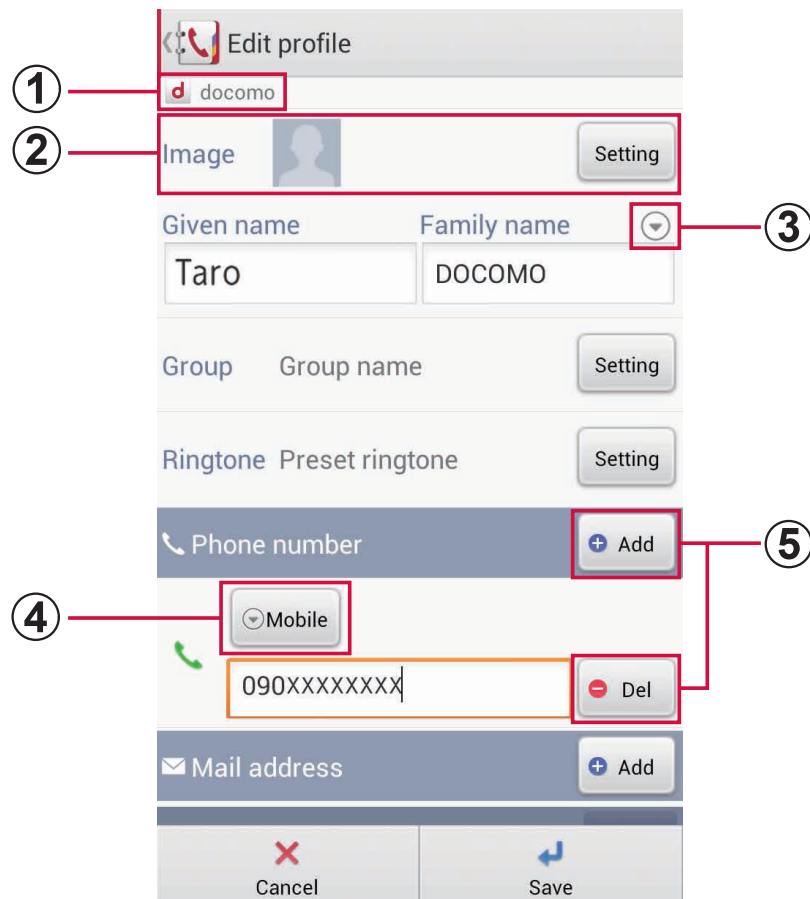

Edit contact screen

To save contacts to the terminal

From the Home screen,  → "Contacts" → 
→ "Phone".

① **Account icon**

A saving location icon appears.

- If you combine contacts in different accounts, two or more account icons appear.

② **Image field**

Tap "Setting" to register an image. To take a photo, tap "Take photo". To select a saved image, tap "Select picture".

③ **Detail entry key**

Enter detailed information such as reading or name prefix.

④ **Label key**

Select a content label (item). To create an optional label name, tap "Custom" in the list.

⑤ **Add/Delete key**

Add/delete an entry field of selected item.

3 Enter the required items

- Tap "Setting" in "Group" to separate the contacts into some groups.
- Tap "Setting" in "Ringtone" to set individual ringtone.
- Tap  in "Others" to enter address, nickname or memo.
- The items that can be set varies by the saving location of the contacts or language setting (P.299).

4 "Save"

- If the contact is not displayed, on the contacts list screen, tap  → "Others" → "Accounts to display" to change the display settings.


Information

- Alternatively, from the Home screen,  → Tap "Contacts" provided by Samsung to activate "Contacts" application to register or manage contacts. However, available function etc. differ from "Phonebook" application provided by DOCOMO.

Checking/Editing a contact

1 From the Home screen, → "Phonebook"

A contacts list screen appears. When the contacts list is not displayed, tap "Contacts".

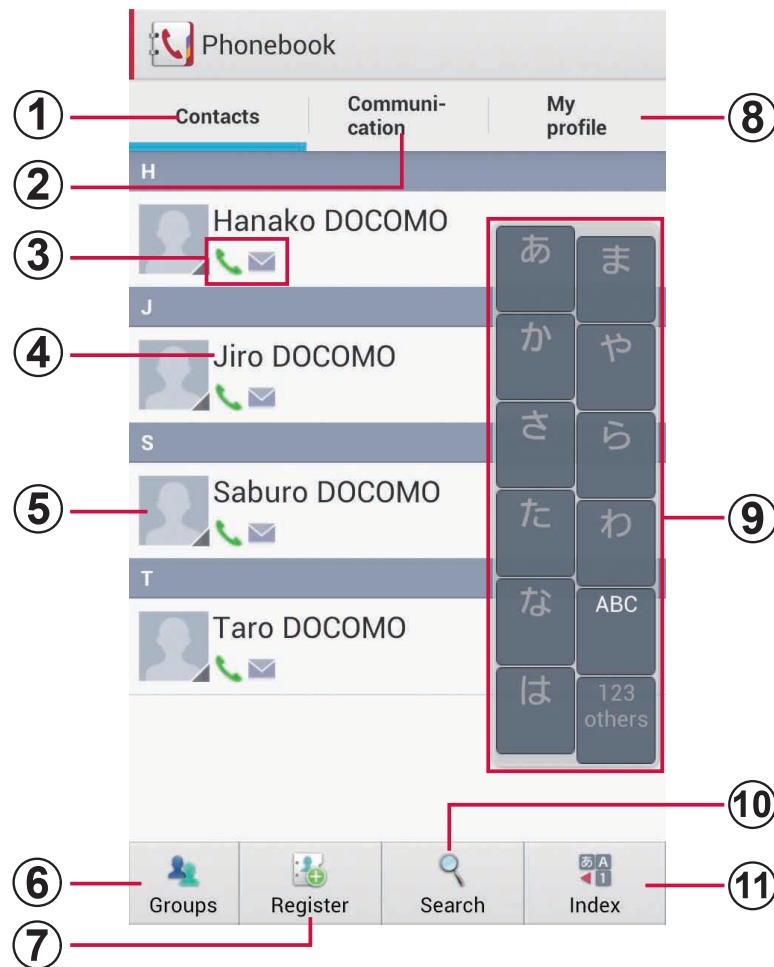

Contacts list screen

① **Contacts**

- Display the contact list screen.

② **Communication**

- A log (call, sp-mode mail, SMS) appears, which shows communications to the members registered in Phonebook. Tap log to check the content of communication or reply for a call, mail, etc.

- On the communication screen, tap "Disp. item" to set displayed items (phone/sp-mode mail/SMS).
- ③ **Registered content**
 - Registered contents are displayed by icons.
- ④ **Name registered in Phonebook**
- ⑤ **Photo set in Phonebook**
- ⑥ **Groups**
 - Select group to display (P.190).
- ⑦ **Register**
 - Add contacts (P.185).
- ⑧ **My profile**
 - Profile screen appears. You can check the phone number, edit/manage your own profile information, create name card data using name card creator application (P.192).
- ⑨ **Index character display area**
 - Tap "Index" to display index characters by which you can search a name in the order of the Japanese syllabary, alphabet, etc.
- ⑩ **Search**
 - Search contacts.
- ⑪ **Index**
 - Display index.

2 Tap the contact you want to check

A profile screen appears.

- To make a call, tap a phone number and tap "Call".
- To create SMS, tap  in the phone number field.
- Tap  in the phone number field to use Koe-no-Takuhaibin (P.174).

- To create a mail, tap a mail address and select an application.
- Tap "Communication" to check the call logs or logs for sp-mode mail/SMS with the selected party.

To edit a contact

Tap "Edit".

Adding a contact to favorites

Add contacts to "Favorites".

- 1** On the Contacts list screen, tap the contact you want to add to Favorites → Tap  (white) to change to  (yellow)

Added contact is displayed in the "Favorites" group.

Information

- Only contacts saved in docomo account can be added to Favorites.

Checking contacts by group

You can manage and use contacts by group setting when saving contacts.

- 1** On the Contacts list screen, "Groups" Group tabs appear on the left of screen. The number of contact items appears in group tab.

- 2** Tap a group you want to check → Tap a contact

■ Adding/Editing a group

- 1 On the Contacts list screen, "Groups" → "Add" tab → Select an account

To edit saved groups

Touch and hold the group tab you want to edit → Tap "Edit group".

- 2 Tap an account to create group for → Select color and icon → Enter a group name

- 3 "OK"

■ Deleting groups

- 1 On the Contacts list screen, "Groups"
- 2 Touch and hold the group tab you want to delete → "Delete group" → "OK"

■ Adding contact to a group

- 1 On the Contacts list screen, "Groups" → "All" tab
- 2 Touch and hold a contact → Drag it onto the group tab you want to add it to

To delete contact from a group

Tap a group tab that includes a contact you want to delete → Touch and hold the contact you want to delete → Drag it onto a group tab you have set.

Information

- Only contacts saved in docomo account or Google account can be added to the group.

Making a call from Phonebook

- 1** On the Contacts list screen, tap the recipient you want to call
A profile screen appears.
- 2** Tap a phone number → "Call"

Registering My profile

- 1** On the Contacts list screen, "My profile"
Profile screen appears.
- 2** "Edit"
Creating/Editing name card data
Tap "Create new"/"Edit" and follow the onscreen instructions.
- 3** Enter the required items → "Save"

Information

- To delete name card data, tap "Delete" → "OK".
- Tap "Exchange this name card" to send registered name card data.

Importing/Exporting contacts

You can import/export contacts between SD card or docomo mini UIM card and the terminal. Also, you can send via email as contact data.

1 On the Contacts list screen,  → "Others" → "Import/Export"

2 Perform the following operations

To Import contacts

"Import from SIM card"/"Import from SD card"

→ Select a location to save

- If "Import from SD card" is selected, import contacts from SD card.
- If you do not set up Google account, a saving location selection screen does not appear. It is saved to docomo account.
- When multiple contacts data (vCard) are saved in the microSD card, a phonebook selection screen appears. Follow the onscreen instructions to select import method.

To Export contacts

Tap "Export to SD card" → Select export method → "OK" → Operate following the onscreen instructions.

To send as contact data (vCard)

"Share phonebook data" → Select sending method.

Menu on contacts list screen/profile screen

Tap  to display the following items.

■ Contacts screen

Item		Description
Delete ^{*1}		Delete contacts.
Help ^{*1}		Check how to use Phonebook or precautions.
Others ^{*1}	Import/Export	→ P.193
	Sync with the server	Sync with Backup center and back up.
	Contacts display order	Change display order of contacts.
	Accounts to display	View only contacts corresponding to tapped items.
	About	Check the version of "Phonebook" application provided by DOCOMO or the number of phonebook items.

Item		Description
Sync. deleted items ^{*2}		Update Recent calls of "Phonebook" application provided by DOCOMO, the sent/received log of sp-mode mail and SMS applications to the latest information.
Share ^{*3}		Send name card data via Bluetooth, mail, etc.
Announcement ^{*3}		Check i-concier information.
Loading name card ^{*3}		Read name card data saved in the microSD card.
Exchange logs ^{*3}		Check exchanging log of name cards.
General settings ^{*3}	Data management	Import/Export name card data.
	Name card exchange settings	Set exchange name cards to "Use"/"Not use".

*1 Appears only on the contacts list screen.

*2 Appears only when "Communication" on the contact list screen is tapped.

*3 Appears only when "My profile" on the contacts list screen is tapped.

■ Profile screen

Item	Description
Share	Send contacts by Bluetooth, a mail, etc.
Delete	Delete contacts.
Set ringtone	Set individual ringtone.
Join/Separate	Link related contacts such as family, company, etc. to put into one contact or separate it.
Sync. deleted items*	Update Recent calls of "Phonebook" application provided by DOCOMO, the sent/received log of sp-mode mail and SMS applications to the latest information.

* Appears only when "Communication" on the Profile screen is tapped.

Information

- If contact is linked by "Join", it does not appear on Contacts list.

SD card backup

You can move and back up phonebook entries, sp-mode mails, bookmarks, etc. using external media such as microSD card.

- For details on SD card backup, see P.404.

Mail/Web browser

sp-mode mail

Send/Receive the mail using i-mode mail address (@docomo.ne.jp). You can use pictogram and Deco-mail. Mails can be received automatically.

For details, see Mobile Phone User's Guide (sp-mode).

- 1** From the Home screen, "spモードメール" (sp-mode mail)
- 2** Install sp-mode mail according to the onscreen instructions

SMS

You can send and receive text messages up to 70 Full-width characters (160 Half-width alphanumeric characters) to/from the terminal with phone number.

Creating and sending SMS

1 From the Home screen, → "Messaging"

A thread (sender/recipient of SMS) list appears.

2 Tap

An SMS creation screen appears.

3 In To field, enter a mobile phone number to send

- To send a message to multiple recipients, separate with a comma (,).
-  → Tap "Groups", "Contacts", "Favorites", "Logs" to enter recipients selecting from Phonebook, Phonebook group, Favorites, history.
- To send to users of overseas network operators, enter "+", "Country code" and then "the recipient mobile phone number". Enter the phone number without a leading "0", if any. You can also enter "010", "Country code" and "the recipient mobile phone number" to send messages. (To reply to the received SMS overseas, enter "010".)

4 Enter text in the "Enter message" field

To enter a smiley

 → "Insert smiley" → Tap a smiley you want to enter.

To insert saved data

 → Tap "Add text".

5 Tap

To save composing SMS as a draft

When a recipient and text are entered and the keypad is not displayed, tap .

Information

- You can also send/receive text messages to/from customers using overseas network operators. For available countries/overseas network operators, see "Mobile Phone User's Guide [International Services]" or the DOCOMO International Services website.
- If "#" or "*" is included in the address, SMS cannot be sent.

Checking received SMS

- 1 From the Home screen,  → "Messaging"

A thread (sender/recipient of SMS) list appears.

- 2 Tap thread you want to read

An SMS list appears.

- Received SMS is displayed in yellow balloon and sent SMS is displayed in blue balloon.

Information

- If "Notifications" (P.203) is marked, when an SMS is received,  appears on the status bar.

Menu on thread list screen/SMS list screen

Tap  to display the following items.

Item		Description
Search ^{*1}		Search SMS.
Settings ^{*1}		
Display	Bubble style	Set the style for callout.
	Background style	Set the style for background.

Item		Description
Settings* ¹		
Display	Use the volume key	Set whether to change character size by 0.
Storage settings	Delete old messages	Set whether to delete automatically when the number of SMS exceeds the specified limit number.
	Set text message limit	Set limit numbers of SMS.
	Text templates	Add/Edit phrase.
Text message (SMS) settings	Delivery reports	Set whether to request delivery report of SMS each time you send.
	Manage SIM card messages	Check/Delete/Copy messages copied to the docomo mini UIM card to the terminal.
	Message center	Set for SMS center.
	Expiry date	Set expiry date for an SMS you send.

Item		Description
Settings* ¹		
Notifi- cation settings	Notifi- cations	Set whether to notify with sound and icon when SMS is received.
	Select ringtone	Set notification sound for sounding when an SMS is received.
Delete threads* ¹		Delete a thread.
Call* ²		Call to the other party.
Insert smiley* ²		Enter a smiley.
Add text* ²		Insert saved data.
Add to Contacts* ^{2*3} / View contact* ^{2*4}		Add/View Contacts.
Delete messages* ²		Delete SMS.

*1 Appears on the thread list screen.

*2 Appears on the Messaging list screen.

*3 SMS to or from contacts who are not saved
to the terminal appears as list.

*4 SMS to or from contacts who are saved to
the terminal appears as list.

Menu on message screen

Touch and hold the sent/received SMS to display the following items.

Item	Description
Delete message	Delete SMS.
Copy message text	Copy an SMS text.
Lock message/ Unlock message	Lock/unlock an SMS to prevent being deleted.
Forward	Forward an SMS.
Copy to SIM	Copy an SMS to docomo mini UIM card.
View message details	Display a type, sender/recipient, date, delivery report or status.

Information

- Up to 20 SMS messages can be copied to the docomo mini UIM card.

Setting up Email

You can set Email account provided by mopera U mail or general service provider that POP3 and IMAP etc. are supported, and send/receive emails.

Flow of preparation for using Email

■ Connecting via packet communication

Step 1: Subscribe to a provider

Step 2: Set an access point (P.257)

Step 3: Set Email account (P.206)

Step 4: Create and send email (P.212)

■ Connecting via Wi-Fi

Step 1: Determine utility form

- For connecting to Public wireless LAN service/company LAN, ask a service provider/network administrator about the required information for connection.
- For connecting under environment such as home, install an access point and obtain necessary information for connection from the Instruction manual of the installed access point, etc.

Step 2: Make settings for Wi-Fi (P.241)

Step 3: Set Email account (P.206)

Step 4: Create and send email (P.212)

Information

- If you send/receive emails to/from a PC or other device, some pictograms, HTML mails, etc. may not be displayed correctly depending on the usage environment.
- If "Sync Email" (P.210) is marked, when the terminal sends/receives an email, synchronization with the mail server is performed. Items to be synchronized such as "Inbox" will be the same state as the synchronizing server.

Setting Email account

When you enter mail address and password, Email account settings are downloaded and set automatically.

- If settings cannot be made automatically or you make settings manually, you need to enter settings for sending and receiving. Prepare the required information of Email account settings in advance.

1 From the Home screen, → "Email"

To set up second or later mail account

From the Home screen,  → Tap "Email" →  → "Settings" → 

2 Enter mail address and password → "Next"

Settings of Email account are downloaded automatically.

- If the settings are not downloaded automatically and an account type selection screen appears, follow the onscreen instruction to make settings.
- "Send email from this account by default" check box appears when setting the second mail account. Marking this check box can set the account as default account. From the Email list screen, tap  → "Settings" → Select an account → Mark/Unmark "Default account" to change the default account.

To set manually

Enter Email address and password → "Manual setup" → Follow the onscreen instruction to make settings.

3 Set account options → "Next"

4 Enter account name and user name → "Done"

Managing Email account

- 1** From the Home screen,  → "Email"
An Email list screen appears.
- 2**  → "Settings" → "General preferences"/Tap an account you want to set
- 3** Tap an item you want to set

Item	Description
General preferences ^{*1}	
Display after deleting message	Set a screen to display after deleting an email.
Message preview line	Set number of lines for Email preview.
Email title	Set whether "Subject" or "Sender" is displayed as an Email tile.
Confirm deletions	Set whether to display a confirmation screen when deleting email.
Quick responses	Edit common phrases. You can insert common phrases when entering body texts in Email creation screen. → P.213

Item	Description
Common settings*2	
Account name	Set an account name.
Your name	Change user name.
Signature	Edit a signature.
Default account	Set whether to use as default Email account. If you mark it,  is displayed at the set account in the Email accounts list screen.
Always Cc/Bcc myself	Add your Email address to Cc/Bcc.
Forward with files	Set whether to send attached files when forwarding email.
Recent messages	Set number of emails to be displayed.
Show images	Set whether to display images. When you receive an email which exceeds the size set with "Size to retrieve emails", images are not displayed even if marked. Tap "Load more details" on a message screen to display images.

Item	Description
Data usage* ²	
Sync Email	Set whether to synchronize with email server.
Email check frequency	Set intervals of checking new emails.
Auto download attachments* ³	Set whether to download attached files automatically when connecting via Wi-Fi.
Size to retrieve emails	Set an email size for receiving.
Notification settings* ²	
Email notifications	Set whether to notify with sound and icon when email is received.
Select ringtone	Set notification sound for sounding when email is received.
Server settings* ²	
Incoming settings	Change settings of receiving server.
Outgoing settings	Change settings of sending server.

*1 Appears when "General preferences" is tapped in Step 2.

*2 Appears when an account is tapped in Step 2.

*3 Does not appear for POP3 account.

Information

- To check received emails for all registered Email accounts by a list, tap an account on the Email list screen → Tap "Combined view".
- To delete an Email account, on the Email list screen,  → "Settings" →  → Mark an Email account you want to delete → Tap "Delete" → "Delete".
- For Microsoft Exchange ActiveSync account, the setting items differ.

Creating and sending an email

- 1** From the Home screen,  → "Email"
- 2** Tap 
 - The Email creation screen appears.
- 3** In To field, enter a mail address to send
 - To add Cc or Bcc,  → Tap "Add Cc/Bcc".
 -  → Tap "Groups", "Contacts", "Favorites" or "Logs" and select recipients from Phonebook, Phonebook group, Favorites, history to enter.
 - When you set multiple Email accounts, tap sender's name at the top of the screen to switch the Email account.
- 4** Enter a subject in the "Subject" field

5 Enter a text in the message field

To attach/insert an S memo

 /  → "S Memo" → Tap an S memo you want to attach or insert.

* When you attach an S memo, select a file format. When you select "JPG", select an image size and tap "OK".

To attach a file

 → Tap the file you want to attach.

To insert saved data

 → Tap the file you want to insert.

To insert a common phrase for a quick response

 → Tap the common phrase to insert.

To set read/unread or delivery report of mail

 → "Tracking options" → Mark "Read receipt" and "Delivery receipt" → Tap "OK".

6 Tap

To save the currently editing email as a draft

 → "Save as draft".

To discard an editing email

 → "Discard" → "No".

Checking received emails

1 From the Home screen, → "Email"

An Email list screen appears.

- When multiple Email accounts are registered, tap an account name to select an account to display, then display the Email list screen.

2 Tap

3 Tap an email you want to read

A message screen appears.

Information

- If "Email notifications" (P.210) is marked, when an email is received,  etc. appears on the status bar.
- Tap  → "Folder" on the Email list to switch folders.
- Tap source Email address to select "Add to Contacts" or "Send email". If Email address is saved on Phonebook, tap source name to select "View contact" and "Send email".
- When data is attached,  appears on the Email list. When you tap "Attachment XX" on the message screen, file name or  appears.
 - Tap a file name to check attached data.
 - To save the attached data to the terminal, tap .

Menu on Email list screen/message screen

Tap  to display the following items.

Item	Description
Search ^{*1}	Search an email.
Folders ^{*1}	Switch, delete, add, and rename folders.
Sort by ^{*1}	Sort emails by "Date (Most recent)", "Date (Oldest)", "Sender (A to Z)", "Sender (Z to A)", "Read/Unread", "Favorites", "Attachments" or "Priority".
View mode ^{*1}	Switch the view of the Email list.
Delete all ^{*1}	Delete all emails.
Mark as unread ^{*2}	Change read email to unread.
Move ^{*2}	Move an email to the other folder.
Save email ^{*2}	Save email on the terminal.
Font color ^{*2}	Set font color.
Background color ^{*2}	Set background color.

Item	Description
Print ^{*2}	Print email using via printer manufactured by Samsung. As of June, 2012, there are no printers that use this features in Japan.
Compose ^{*2}	Compose email.
Save as group ^{*2}	Save email as a group.
Settings ^{*1*2}	Change Email account settings. → P.208

*1 Appears on the Email list screen.

*2 Appears in the message screen.

Information

- Touch and hold email on the Email list screen to display the menu of each operation.

Gmail

You can send/receive emails using Gmail.

- To use Gmail, you need to set Google account. When a setting screen of Google account appears, perform the settings according to onscreen instructions and then operate it.

Opening Gmail

- 1 From the Home screen,  → "Gmail"
- 2 On "Inbox" screen, tap email you want to read
The contents of selected email appear.

Creating and sending Gmail

- 1 From the Home screen,  → "Gmail"
- 2 On "Inbox" screen, tap 
Email creation screen appears.
- 3 In to field, enter a address
 - To send an email to multiple recipients, separate with a comma (,).
 - To add Cc/Bcc, tap  → "Add Cc/Bcc".
- 4 Enter subject in "Subject" field

5 Enter text in "Compose email" field

6 Tap 

To save draft email

Tap  → "Save draft"

To edit draft email

On "Inbox" screen, tap  → "Drafts" → Tap draft email you want to edit → Tap .

Switching accounts

1 From the Home screen,  → "Gmail"

2 On "Inbox" screen, "Inbox"

3 Tap the account to switch

Inbox of the selected account appears.

Information

- For details, from "Inbox" screen,  → Tap "Help" to refer to Android OS Help.

Early Warning "AreaMail"

Area Mail is a service with which you can receive emergency earthquake flash reports delivered by the Meteorological Agency etc.

- You can receive Area Mails for free without subscriptions.
- Up to 50 Area Mails can be stored.
- Area Mails cannot be received when the power off, in Airplane mode, during International roaming, while displaying the PIN code entry screen, etc. Also if the terminal is low on memory, receiving Area Mail may fail.
- Area Mail that could not be received cannot be received later.

When receiving Early Warning "AreaMail"

When Area Mail is received, the Area Mail ringtone sounds, a notification icon appears on the status bar, and receiving screen opens.

- The Area Mail ringtone sounds in maximum volume. The setting cannot be changed.
- The Area Mail ringtone sounds even in Silent mode by default. Setting not to sound in Silent mode is available.

Viewing received Area Mail

- 1 From the Home screen,  → "Area Mail"
- 2 Tap an Area Mail you want to check

Setting Early Warning "AreaMail"

Set incoming settings and ringtone settings. You can also check receiving operation.

- 1 From the Home screen,  → "Area Mail"
- 2  → "Settings"
- 3 Tap an item to set

Item		Description
Receive setting		Set whether to receive Area Mail.
Beep tone		Set ring time of ringtone. Set whether to sound ringtone in Silent mode.
Check screen image and beep tone		Check receiving screen and ringtone for Earthquake Early Warning, Tsunami Warning and Disaster/Evacuation information.
Other settings	Receive entry	Register/Delete Area Mail.

Talk

Google Talk is a Google instant message program. You can chat with friends who have a Google account. To use Google Talk, set Google account.

Preparation for Google Talk

To use Google Talk, log in and add members. However, if you have already set Google account, log-in is not unnecessary.

Login to Google Talk

- 1 From the Home screen,  → "Talk"
 - Google account that have already set appears.

Information

- If Google account setting is not completed, "Add a Google Account" appears. Follow the onscreen instructions. If you do not have Google account, you can get Google account.
- For details on Google Talk, from the Google Talk screen, tap  → "Help" to refer to Android OS Help.

Chatting

- 1** From the Home screen,  → "Talk"
- 2** Tap account you want to chat with
 - Chat screen appears.
- 3** Enter text in the "Type message" field
→ 
 - Message you entered is sent.

Web browser

Using web browser

Using web browser, you can view web pages as PCs.

- Some web pages may not be displayed or may not appear properly.

Starting web browser

1 From the Home screen, "Internet"

Web browser activates and web page set as home page (by default, dmenu (<http://smt.docomo.ne.jp/>) (in Japanese only)) appears.



Browser screen


- ① **Address bar**
Enter a URL of web page or a keyword you want to search.
- ② **Reload**
- ③ **Bookmarks/History/Saved pages**
Display a list of bookmarks, history or saved pages.

④ Windows

Switch between windows, close and open windows. Tap  to view web page in secret mode.

Exiting web browser

1 Touch and hold  → "Task manager" → "End" of "Internet" → "OK"

- Even when you return to the Home screen by pressing  or tap  on the browser screen, the browser is not terminated.

Information

- The following operations are available (Some operations are not available depending on the web page display).
 - Zoom in/out: Widen/Narrow the distance between your fingers at the point you want to zoom in/out.
 - Zoom in/out a part framed: Double-tap at the point you want to zoom in/out.
 - Scroll: Scroll/Flick the screen.
 - Back to the previous screen: Tap .
 - Using magnifying glass: Touch and hold the screen (Available only for text area).
 - Copy text: Touch and hold the screen (without link) → Drag / in all directions and select the text range to be copied → .
 - Searching text: Touch and hold the screen (without link) → Drag / in all directions and select the text range to search →  → "Find"/"Web Search".
 - Sharing text: Touch and hold the screen (without link) → Drag / in all directions and select the text range to share →  → Tap sharing method.

Operating links in web pages

1 On the browser screen, touch and hold a link

2 Tap an item you want to use

Item	Description
Open	Open web page.
Open in new window	Open web page in new window.
Save link	Save web page to the terminal/microSD card.
Copy link URL	Copy URL.
Select text ^{*1}	Select text.
Save image ^{*2}	Save an image to the terminal/microSD card.
Copy image ^{*2}	Copy images to Clipboard.
View image ^{*2}	Display an image.
Set as wallpaper ^{*2}	Set an image as wallpaper of the Home screen.

*1 Appears only when touching and holding linked text.

*2 Appears only when touching and holding linked image.

Information

- Depending on the web pages, some link operation menu may not be displayed or the displayed items may differ.

Menu items on browser screen

Tap  to display the following items.

Item	Description
Forward	Go back to the previous web page when displaying the web page by tapping  .
New window	Open new window.
Add bookmark	Add web page to bookmark. → P.230
Add shortcut to home	Add a shortcut of web page to the Home screen.
Share page	Share or send URL of web page via online services/Bluetooth/Email etc.
Find on page	Search text in web page.
Desktop view	Set whether to open the desktop version web page.
Save for offline reading	Save a displayed web page to view offline. To check the contents, tap  → "Saved pages".

Item	Description
Brightness	Adjust the screen brightness.
Downloads	Check downloaded or downloading data information.
Print	Print browser screen via printer manufactured by Samsung. • As of June, 2012, there are no printers that use this features in Japan.
Settings	→ P.233

Managing history and bookmarks

Viewing web pages from the history

1 From the Home screen, "Internet"

2  → "History"

A history list appears.

- History is displayed in reverse chronological order of view date.
- In "Most visited" field, history is displayed in descending order of viewing frequency.
- To add to bookmark, tap ★ (gray) in History. ★ (orange) appears for the history which is added as bookmark.

3 Tap a web page you want to view

Information

- To delete all history (including "Most visited"), on the history list,  → Tap "Clear history".

Adding a web page to Bookmarks

- 1 From the Home screen, "Internet"
- 2 Display a web page to bookmark →  → "Add bookmark"
- 3 Check or change the name → Tap "Folder" field → Tap a folder you want to register to → "Save"

Viewing web pages from a bookmark

- 1 From the Home screen, "Internet"
- 2  → "Bookmarks"
A bookmark list appears.
- 3 Tap a web page you want to view

Information

- When  is tapped on the bookmark list, the following items appear.
 - "List view"/"Thumbnail view": Change display method of list.
 - "Create folder": Create a folder.
 - "Change order": Change display order of the bookmark list.
 - "Move to folder": Change the bookmark registering location.
 - "Delete": Delete bookmarks.

Menu of history/bookmark

The following items appear when touching and holding history/bookmark.

Item	Description
Open	Open a web page in current window.
Open in new window	Open a web page in a new window.
Remove from Bookmarks ^{*1}	Delete a web page saved as a bookmark in history from bookmark.
Add bookmark ^{*1}	Add to bookmark (It is not displayed if web page is already registered to bookmark).
Edit bookmark ^{*2}	Edit the name or URL of the bookmark and change the storage folder.
Add shortcut to home ^{*2}	Create shortcut of bookmark on the Home screen.
Share link	Share URL of web page via online service or send via Bluetooth function or mail attachment.
Copy link URL	Copy URL of web page.
Remove from history ^{*1}	Delete a web page from history.

Item	Description
Delete bookmark ^{*2}	Delete a bookmark.
Set as homepage	Set a web page as home page.

*1 Appears only in history list.

*2 Appears only in bookmark list.

Setting web browser

- 1 From the Home screen, "Internet"
- 2  → "Settings"
- 3 Tap an item you want to set

Item	Description
General	
Set home page	Set a home page.
Form auto-fill	Set whether to enter contents registered in "Auto-fill text" when tapping a web form field.
Auto-fill text	Register contents for auto entry to web form field.

Item	Description
Privacy and security	
Clear cache	Delete cache data.
Clear history	Delete view history.
Show security warnings	Display warning for low-security web pages.
Accept cookies	Permit to save or read Cookies.
Clear all cookie data	Delete saved Cookies.
Remember form data	Save text data entered to a web page.
Clear form data	Delete stored text data.
Enable location	Permit accessing the location information of the terminal.
Clear location access	Delete all location information of the terminal.

Item	Description
Privacy and security	
Remember passwords	Store user name/ password entered to a web page.
Clear passwords	Delete stored username/ password.
Enable notifications	Set whether to enable notification function.
Clear notifications	Delete notifications.
Accessibility	
Force zoom	Activate "Accessibility" settings and set whether to zoom in/out all web pages.
Scale text up and down	Set font size.
Zoom amount on double tap	Set zoom ratio when double-tapping.
Minimum font size	Set minimum font size.
Inverted rendering	Set whether to set reverse rendering.
Contrast	Set contrast when "Inverted rendering" is marked.

Item	Description
Advanced	
Select search engine	Set search engine.
Open in background	Display a new window behind the current viewing windows.
Enable JavaScript	Enable JavaScript.
Enable plug-ins	Enable plug-ins.
Default storage	Set a saving location of downloaded data.
Website settings	Display detail of the web page accessed to location information.
Default zoom	Set display magnification of web page.
Open pages in overview	Display a newly opened web page in full-screen view.
Auto-fit pages	Display a web page fitting the screen size.
Block pop-ups	Block popup windows.
Text encoding	Set text encode.

Item	Description
Advanced	
Reset to default	Delete data and reset settings to return to the default in Browser.
Bandwidth management	
Preload search results	Set browser to preload a highly trusted search result in background.
Load images	Set whether to display images.
Labs	
Quick controls	Set whether to enable to operate browser by displaying quick control. • Swipe from the left/right end of the screen to display quick control, and drag your finger to an operation icon for which you want to perform, then release it so that you can perform operations. • If marked Quick controls, address bar etc. is not displayed.
Full screen	Set whether to hide the status bar and display a web page in full screen.

Settings

Setting menu

You can set various items such as screen brightness, screen view, ringtone, communication, etc.

- 1** From the Home screen,  → "Settings"
- 2** Select a menu item and make settings

Wireless and network

You can set for wireless network connection.

Item	Description
Wi-Fi	→ P.240
Bluetooth	→ P.246
Data usage	→ P.246
More settings	
Airplane mode	→ P.247
Kies via Wi-Fi	→ P.247
VPN	→ P.248
Tethering and portable hotspot	→ P.250
Wi-Fi Direct	→ P.253
Nearby devices	→ P.254
Mobile networks	Set data communications, roaming, access point (APN), network mode, network operator, etc.

Wi-Fi

You can use Wi-Fi function of the terminal to connect to wireless access point of your home or company network. Also, you can connect to Public wireless LAN service access point to use mails and Internet.

■ Reception interference caused by Bluetooth devices

The terminal's wireless LAN device and Bluetooth devices use the same frequency band (2.4GHz). If you use the terminal near a Bluetooth device, reception interference may occur or the communications speed may lower. Also, you may hear noise or have a connection problem. In these cases, do the following:

1. Keep the wireless LAN device over 20 m away from a Bluetooth device.
2. Within 20 m, turn off either the wireless LAN device or the Bluetooth device.

Information

- Packet communication can also be used even when Wi-Fi function is ON. However, Wi-Fi will be used first during Wi-Fi connection. LTE/3G/GPRS network will be connected automatically if Wi-Fi network is disconnected. Be noticed that packet communication charge will be applied if you keep using LTE/3G/GPRS network after toggling.

Enabling Wi-Fi and connecting to network

- 1** From the Home screen,  → "Settings" → "Wi-Fi"
- 2** Tap 
Scanning available Wi-Fi networks starts automatically and a list is displayed.
- 3** Tap a Wi-Fi network you want to connect → "Connect"
To connect to a Wi-Fi network protected by security, enter a security key and tap "Connect".

Connecting using WPS

Wi-Fi network with "WPS available" shown can be connected using WPS (Wi-Fi Protected Setup). Tap a Wi-Fi network → Mark "Show advanced options" → Select connecting method from "WPS" → Operate on access point as required → Tap "Connect".

Information

- The Wi-Fi network security key connected once is automatically saved so that you do not need to enter it next time.

Notifying Wi-Fi open network

Set whether to notify when available open network exists near you.

- 1 From the Home screen,  → "Settings" → "Wi-Fi"
- 2  → "Advanced"
- 3 Mark "Network notification"

Canceling connection of Wi-Fi network

- 1 From the Home screen,  → "Settings" → "Wi-Fi"
- 2 Tap a connected Wi-Fi network → "Forget"

Setting Wi-Fi access point

- For information necessary for connection, refer to user manual of wireless LAN access point you use. For connecting to company LAN or using Public wireless LAN service, ask a network administrator or service provider about the required information for connecting.
- When the wireless LAN access point is set for connecting only to the MAC address registered device, register the MAC address of the terminal to the wireless LAN access point. To check MAC address, from the Home screen,  → "Settings" → "Wi-Fi" → Tap "Advanced". You can view IP address for connected Mobile AP in Wi-Fi detail screen.

1 From the Home screen,  → "Settings" → "Wi-Fi"

2  → "Add network"

3 Enter the network SSID → Set the security (Authentication method) → "Save"

The possible certificate method is "None", "WEP", "WPA/WPA2 PSK", "802.1x EAP".

Setting sleep policy of Wi-Fi

You can set to disable Wi-Fi when the display of the terminal turns off or to enable when charging.

- 1** From the Home screen,  → "Settings" → "Wi-Fi"
- 2** "Advanced"
- 3** "Keep Wi-Fi on during sleep" → Select a sleep policy

Selecting frequency band for Wi-Fi

Select frequency band to use.

- 1** from the Home screen,  → "Settings" → "Wi-Fi"
- 2** "Advanced"
- 3** "Wi-Fi frequency band" → Select frequency band to use

Using static IP address

You can set the terminal to connect to Wi-Fi network using the static IP address.

- 1** From the Home screen,  → "Settings" → "Wi-Fi"
- 2** Tap 
- 3** Tap Wi-Fi network to connect → Mark "Show advanced options"
- 4** In "IP settings", tap "Static"
- 5** Set required items
For using static IP address, enter the following items.
 - IP address
 - Gateway
 - Network prefix length
 - DNS 1/DNS 2
- 6** "Connect"

Bluetooth

- 1 From the Home screen,  → "Settings" → "Bluetooth"
- 2 Tap 
- 3  → Select item

Item	Description
Device name	Edit a device name of the terminal.
Visible time-out	→ P.313
Show received files	Display received file.

Information

- Mark "SC-06D" to show the terminal from other Bluetooth devices.
- Tap "Scan" to re-search Bluetooth devices.

Data usage amount

Enable/Disable data communication or set upper limit of data communication. Also set a period of time for measuring amount of communications.

Airplane mode

Disable all wireless connections.

- 1 From the Home screen, tap  → "Settings" → "More settings" → Mark "Airplane mode" → "OK"

Information

- Alternatively, press  for 1 second or longer and tap "Airplane mode" to switch setting.
- If you mark "Airplane mode", Wi-Fi also turns OFF. However you can turn ON the Wi-Fi while enabling Airplane mode.

Connecting to Samsung Kies via Wi-Fi

You can connect Samsung Kies (P.318) via Wi-Fi.

- 1 Start "Samsung Kies" on a PC
- 2 From the Home screen, tap  → "Settings" → "More settings" → "Kies via Wi-Fi" → Confirm details of note → "OK"

A "Kies via Wi-Fi" screen appears.

- If Wi-Fi function is not ON, network connection screen appears. Select connection method and follow the onscreen instructions.

3 Tap searched device name

- If Wi-Fi connection request screen appears, follow onscreen instructions.

Information

- Connect PC and the terminal to the same Wi-Fi network.

Connecting to VPN (Virtual Private Network)

VPN (Virtual Private Network) is a technology to connect to the information in a protected local network from another network. Generally, VPNs are provided to companies, schools and other facilities. A user can access to the information in the local network from outside of the premises.

- To set up a VPN access from the terminal, you need to retrieve the information related to security from your network administrator.
- When ISP is set to sp-mode, PPTP is not available.

Adding a VPN

1 From the Home screen,  → "Settings" → "More settings" → "VPN"

- For the first activation, an attention screen appears. Tap "OK" and set screen unlock method following the onscreen instructions.

2 "Add VPN network"

To edit VPN

Touch and hold VPN to edit → "Edit network" → Set each item → Tap "Save".

To delete VPN

Touch and hold VPN to delete → Tap "Delete network".

3 Follow the instruction of the network administrator to set required items of VPN settings

4 "Save"

Connecting to a VPN

- 1 From the Home screen,  → "Settings" → "More settings" → "VPN"
 - 2 Tap a VPN you want to connect to
 - 3 Enter necessary authentication information → "Connect"
-  appears on the status bar.

Disconnecting VPN

- 1 Open the notification panel → Tap the VPN connecting notification
- 2 "Disconnect"

Using tethering

Tethering means to connect devices support wireless LAN and USB to Internet via mobile phone lines, for example, a smart phone, as a modem.

Setting USB tethering

You can connect to Internet by connecting the terminal to PC via USB cable SC02.

- To perform tethering, dedicated driver is required. For details, refer to the URL below.
<From a PC> <http://www.samsung.com/jp/support/download.html> (In Japanese)

1 Connect the terminal to PC via USB cable SC02

- For connection method, see "Connecting with USB cable SC02" (P.317).

2 From the Home screen, → "Settings" → "More settings" → "Tethering and portable hotspot"

3 Mark "USB tethering" → Check details of precautions → "OK"

Information

- SD card cannot be connected to PC during USB tethering.
- Operating environments for USB tethering are as follows. DOCOMO is not liable for the operation after upgrading/adding/changing OS.
Windows XP (Service Pack 3 or later),
Windows Vista and Windows 7

Setting Wi-Fi tethering

You can use your terminal as a portable hotspot and connect at most 10 devices support wireless LAN to Internet.

- 1** From the Home screen,  → "Settings" → "More settings" → "Tethering and portable hotspot" → "Portable Wi-Fi hotspot"
- 2** Tap 
- 3** Confirm details of notes → "OK"

Adding access point for Wi-Fi tethering

- 1** From the Home screen,  → "Settings" → "More settings" → "Tethering and portable hotspot" → "Portable Wi-Fi hotspot"
- 2** Tap 
If the message is displayed, tap Confirm details of notes → "OK".
- 3** "Configure"
- 4** Tap "Network SSID" field and input the network SSID
 - By default, "AndroidHotspotXXXX" is set.
- 5** "Security"
Select a proper setting from "Open", "WPA PSK" and "WPA2 PSK".
- 6** Tap "Password" field to enter password
Password is not required if you set "Open" in "Security".
- 7** "Save"

Information

- The default setting is "WPA2 PSK".
- While connecting via Wi-Fi tethering, in the Portable Wi-Fi hotspot screen, "Configure" → Mark "Hide my device" → Tap "Save" to disconnect the connected wireless LAN device. Unmark "Hide my device" → Tap "Save" to reconnect.

Wi-Fi Direct settings

You can connect Wi-Fi Direct devices and can exchange data.

1 From the Home screen,  → "Settings" → "More settings" → "Wi-Fi Direct"

2 Tap 

-  appears on the status bar.

3 Tap a detected device name

- When the connection is accepted on the searched device, the terminal will be connected via Wi-Fi Direct and  appears on the status bar.
- Tap "Scan" to update search result.

To connect with multiple devices

"Multi-connect" → Mark a device to connect → "Done".

Canceling the Wi-Fi Direct connection

1 From the Home screen,  → "Settings" → "More settings" → "Wi-Fi Direct"

2 "End connection" → "OK"

Nearby devices

Use Wi-Fi function to share and play the terminal media files on other client device (DLNA: Digital Living Network Alliance).

- To use this function, connect the terminal and device to be accessed to the same Wi-Fi network in advance.

Setting nearby device

1 From the Home screen,  → "Settings" → "More settings" → "Nearby devices"

2 Set each item

Item	Description
Shared contents	Select contents to be shared.
Device name	Edit a name of the terminal.
Access control	Set a method for accessing the terminal. • When you select "Only allowed devices", you can access only devices registered in "Allowed devices list".
Allowed devices list*	Display a device list that can access the terminal.
Not-allowed devices list*	Display a device list that cannot be access the terminal.

Item	Description
Download to	Set a saving location of media files that is uploaded to the terminal from the other device.
Upload from other devices	Set action of the terminal when media file is uploaded.

* It can be selected only when "Access control" is set to "Only allowed devices".

Information

- To delete devices added to Allowed devices list/Not-allowed devices list, from "Allowed devices list"/"Not-allowed devices list" → Mark devices to delete → Tap "Delete".

Registering DLNA device for accessing the terminal

- 1** From the Home screen,  → "Settings" → "More settings" → "Nearby devices"
- 2**  of "File sharing".
When a notes screen appears, tap "OK".
 is displayed on the status bar.
- 3** Perform connecting operation on the device to be accessed to the terminal.
A confirmation screen asking if you permit to access appears.

4 "OK"

The terminal is connected to the accessed device and the device will be added to the Allowed devices list (P.254).

- To reject access, tap "Cancel". The device will be added to Not-allowed devices list (P.254).

5 Perform play operation from the accessed device.

Setting an access point

Access point for connecting the Internet (sp-mode, mopera U) is already registered. You can add or change it if necessary.

By default, sp-mode is set for the usual access point.

Checking the access point in use

- 1 From the Home screen,  → "Settings" → "More settings" → "Mobile networks" → "Access Point Names"

Setting an access point additionally

- 1 From the Home screen,  → "Settings" → "More settings" → "Mobile networks" → "Access Point Names" →  → "New APN"
- 2 "Name" → Enter a name of network profile to create → "OK"
- 3 "APN" → Enter the access point name → "OK"
- 4 Enter the other items required by the network operator
 - Do not change "MCC" and "MNC" other than 440 and 10, respectively. If they are changed, they are not displayed on the screen.

5 → "Save"

Information

- When you changed settings of MMC or MNC and access points are not displayed, perform reset to default or set an access point manually.

Initializing an access point

By initializing an access point, the settings can be in the default state.

1 From the Home screen,  → "Settings" → "More settings" → "Mobile networks" → "Access Point Names"

2  → "Reset to default"

sp-mode

sp-mode is ISP for NTT DOCOMO smartphone. In addition to accessing Internet, you can use the mail service using the same address as i-mode mail (@docomo.ne.jp), etc. sp-mode is a service requiring subscription. For details of sp-mode, refer to NTT DOCOMO's website.

mopera U

mopera U is ISP for NTT DOCOMO's Internet connection. By subscribing to mopera U, you can use Internet after making simple settings. mopera U is a service requiring subscription.

Setting mopera U

- 1 From the Home screen,  → "Settings" → "More settings" → "Mobile networks" → "Access Point Names"
- 2 Tap  (neutral) to change to  (green) on "mopera U" / "mopera U 設定 (mopera U settings)"

Information

- "mopera U設定 (mopera U settings)" is an access point for setting mopera U. When you use the access point for mopera U settings, packet communication charges do not apply. Note that you can set only the initial setting screen or the setting change screen. For details of mopera U settings, refer to mopera U website.

Sound

You can set ringtone, vibration, etc.

Item	Description
General	
Silent mode	→ P.262
Volume	→ P.263
Vibration intensity	Set intensity of vibration.
Ringtone and notifications	
Device ringtone	→ P.264
Device vibration	→ P.265
Default notifications	→ P.264
Sound and vibration	Set ON/OFF of vibration when notifying of incoming call, new SMS, etc.

Item	Description
System	
Keytones	Set operation sound to ON/OFF for tapping number key on the dial screen.
Touch sounds	Set operation sound to ON/OFF for tapping  ,  or menu items.
Screen lock sound	Set notification sound for the screen lock to ON/OFF.
GPS notifications	Set ON/OFF of the sound when activating Google Maps. Enabled if "Use GPS satellites" (P.382) is marked.
Haptic feedback	Set vibration to ON/OFF for certain operations.
Auto haptic	Mark applications to vibrate the terminal responding sound. Applications which have vibration function are marked in advance. However, unsupported functions are inoperative even if they are marked.

Shutting off device ringtone

If Silent mode is set to "Vibrate"/"Mute", incoming call ringtones and notification sounds no longer ring.

1 From the Home screen,  → "Settings" → "Sound" → "Silent mode" → "OFF"/"Vibrate"/"Mute"

- If "Vibrate" is set,  appears on the status bar.
- If "Mute" is set,  appears on the status bar.
- Open the Notification panel and tap  to change Silent mode type.

Information

- When Silent mode is set to "OFF" with "Sound and vibration" marked, ringtone/notification sound sounds and the terminal vibrates when receiving calls, SMS, etc. If you unmark "Sound and vibration", only ringtone/notification sound sounds.
- If you change "Ringtone" of "Volume" when Silent mode is set to "Vibrate"/"Mute", Silent mode turns to "OFF".

Adjusting volume of each sound

- 1 From the Home screen,  → "Settings" → "Sound" → "Volume"

A volume bar appears.

Item	Description
Music, Video, games, and other media	Playback sound of Music Player etc.
Ringtone	Ringtone for incoming call
Notifications	Notification sound for incoming notification (P.94)
System	Touch operation sound and ON/OFF sound for screen lock/unlock, GPS notification.

- 2 Drag  of each sound volume left to right. → "OK"

Adjusting ringtone volume with volume key

- 1 Press  (volume key)

Notifying an incoming call/ notification by sound/vibration

Set melody of ringtone/notification sound etc. or whether to vibrate.

Setting ringtone/notification sound

- 1** From the Home screen,  → "Settings" → "Sound" → "Device ringtone"/"Default notifications"
- 2** Tap a ringtone/notification sound you want to set → "OK"
 - When "Silent" is set, ringtone/notification sound does not sound.

Setting vibration

- 1 From the Home screen,  → "Settings" → "Sound" → "Device vibration" → Select a pattern you want to set → "OK"
 - You can adjust the intensity of vibration at "Vibration intensity" (P.260).
 - Tap "Create" to create a pattern yourself.

Display

You can set screen brightness or display method.

Item	Description
General	
Brightness	→ P.268
Screen timeout	Set time until screen display turns off. The screen becomes dim a little in approx. 6 seconds before the set time to notify the screen off
Smart stay	Set Screen timeout setting to be disabled when the terminal detects that you are watching the screen. •  lights on the status bar while the function activates.
Auto-rotate screen	Switch to portrait/landscape view according to orientation of the terminal automatically.
Touch key light duration	Set timeout time until the backlight of  or  is off.

Item	Description
Font	
Font style	Set font style for the screen.
Font size	Set font size in the screen.
Screen	
Auto adjust screen tone	Adjust screen tone according to the displayed image to reduce the battery.
More settings	
Display battery percentage	Set whether to show battery level in percentage.
Gyroscope calibration	Level-calibrate the terminal using built-in acceleration sensor

Adjusting the brightness of the display

The brightness of the display is set to auto-adjustment according to the ambient brightness by default. To adjust manually, perform the following operations.

- 1** From the Home screen,  → "Settings" → "Display" → "Brightness"
- 2** Unmark "Automatic brightness"
- 3** Drag  of brightness → "OK"

Information

- The highest brightness may not be set if the terminal is hot due to prevention of overheating.

Wallpaper

Set wallpapers for the Home screen or lock screen.

Item	Description
Home screen	Select a wallpaper for the Home screen from "Gallery"/"Live wallpapers"/"Wallpapers"/"Wallpaper gallery".
Lock screen	Select a wallpaper from "Gallery"/"Wallpapers".
Home and lock screens	Select a wallpaper for the Home screen and lock screen from "Gallery"/"Live wallpapers"/"Wallpapers".

LED indicator

Set action of notification LED when the screen display is off.

Item	Description
Charging	Set ON/OFF of the notification LED when connecting the terminal to a charger.
Low battery	Set ON/OFF of notification LED when the battery is low.
Missed event	Set ON/OFF of notification LED when missed calls, unread messages or application events exist.

Motion

You can set motion setting which can be operated by detecting tilt, etc. of the terminal.

* In some applications provided by DOCOMO and other applications, motion function may not be available.

Item	Description
Motion activation	Set whether to activate Motion.
Direct call	→ P.80
Smart alert	→ P.81
Double tap to top	→ P.81
Tilt to zoom	→ P.81
Pan to move icon	→ P.82
Pan to browse images	→ P.82
Shake to update	→ P.82
Turn over to mute/pause	→ P.83
Hand motions	
Palm swipe to capture	→ P.83
Palm touch to mute/pause	→ P.83

Power saving

Set for power saving mode.

Item	Description
Power saving mode settings	
CPU power saving	Limit the maximum performance of CPU.
Screen power saving	Set the display to dim.
Background color	Change the background color in order to save battery power for Email and Internet.
Turn off haptic feedback	Turn vibration for tapping screen to OFF to reduce battery power consumption.
Power saving tips	
Learn about power saving	Display descriptions for each content of the power saving mode settings.

Storage

You can check memory space of microSD card or the terminal, or format microSD card.

Item	Description
Device memory	
Total space	Display total memory space of the terminal. Under Total space, amount of stored data such as Apps, Pictures, etc. is displayed in category. Tap an item to check data.
SD card	
Total space*	Display entire memory space of microSD card.
Available space*	Display free memory space of microSD card.
Unmount SD card*/Mount SD card	Unmount/recognize microSD card.
Format SD card*	→ P.62

* Appears only when microSD card is attached.

Battery

View battery use, battery level, etc.

Application manager

You can set application view and management.

Item	Description
Downloaded	Manage downloaded applications.
Running	View or manage current services.
All	Manage/Remove installed applications.

Disabling applications

Disabled application stops its operation and it is not displayed on the Applications screen.

- The application is not uninstalled.
- It is available for some applications or services that cannot be uninstalled.

1 From the Home screen,  → "Settings" → "Application manager" → "All"

2 Tap an application to disable → "Disable" → "OK"

Information

- If you disable an application, another application linking with the disabled application may not be operated correctly. Enable the application again to operate linked application correctly. To enable again, from the Home screen,  → "Settings" → "Application manager" → "All" → Scroll down to the end of the list → Tap an application you want to enable → Tap "Enable".

Docomo service

You can set functions for docomo service.

Item	Description
Application manager	Check update checker, etc.
Wi-Fi	Set up & manage Wi-Fi settings for docomo service.
docomo apps password	Set password for docomo apps.
AUTO-GPS	AUTO-GPS function setting, history of positioning location.
docomo location information	Set location information service function for imadoco search/imadocokantan search/Keitai-Osagashi Service.
docomo Wi-Fi かんたん接続 (docomo Wi-Fi easy connection)	Make easy settings for using docomo Wi-Fi or home Wi-Fi network.
Open source licenses	Display Open source licence.

Home selection

You can switch home applications for the Home screen.

Item	Description
docomo Palette UI	→ P.126
TouchWiz home	Set Home screen provided by Samsung.

Accounts and sync

You can set synchronization of each application or online service.

Item	Description
Add account	→ P.278
Sync all/ Cancel sync	Synchronize registered accounts/Stop synchronizing.

Setting account

- 1** From the Home screen,  → "Settings" → "Accounts and sync"
- 2** "Add account" → Tap an account you want to add
- 3** Set according to the onscreen instructions
 - For the online services requiring log in such as Facebook, enter mail address, password, etc. and tap "Log in"/"ログイン"(Log in).

Information

- To edit a registered account, delete the account and register again.
- To change synchronizing items, tap an account → mark only items to synchronize.
- To synchronize manually, tap an account to synchronize → "Sync now".

Samsung account

Set up Samsung account to set SIM change alert. Operating the terminal remotely using SamsungDive is also available.

- Tap "Account and sync" in setting menu screen → "Add account" → "Samsung account" → follow the onscreen instruction to make Samsung account settings.
- For details on SamsungDive, refer to the following website.
<http://www.samsungdive.com>

Information

- Make sure to note down, etc. the password you set when registering a Samsung account not to forget it. If you forget your Samsung account password, contact a docomo Shop.

Setting accounts such as Facebook

Online service accounts such as Facebook, Google can be created on the terminal and you can synchronize or send/receive data between the terminal and each online service server.

- You can set a Microsoft Exchange ActiveSync account to synchronize with Microsoft Exchange Server 2007 (or former).

Information

- For setting for each account, perform under the environment where Internet connection is available.
- Depending on country/region, some function such as auto-synchronization may not be available.
- For setting each account, refer to the following website.
 - docomo account:
<http://www.nttdocomo.co.jp/>
 - Windows Live Hotmail account :
<http://windowslive.jp.msn.com/>
(In Japanese)
 - Facebook account:
<http://www.facebook.com/>
- To set Microsoft Exchange ActiveSync account, ask your network administrator for the setting information.

Deleting account

When registered account is deleted, the account data saved to the terminal (messages, contacts, settings, etc.) is also deleted.

- The data stored on the server is not deleted.

1 From the Home screen,  → "Settings" → "Accounts and sync"

2 Tap an account to delete → "Remove account" → "Remove account"

Information

- Some accounts may not be deleted. To delete the account, perform "Factory data reset" (P.301).

Location services

You can set for location services.

Item	Description
Use wireless networks	→ P.382
Use GPS satellites	→ P.382
Location logs	→ P.382
Location and Google search	→ P.382

Security

You can set for security.

Item	Description
Screen security	
Screen lock	→ P.293
With swipe lock	→ P.294
Lock screen options	→ P.295
Improve facial recognition	Shoot you in various conditions such as in the light, in the dark, wearing glasses, etc. to improve accuracy of facial recognition • It appears when you set screen unlock method to "Face unlock".
Make pattern visible	Set whether to display the trace of pattern when unlocking the screen. • It appears when you set screen unlock method to "Pattern".

Item	Description
Screen security	
Lock automatically	Set time from when the screen display turns off till when the screen lock activates. It appears when you set screen unlock method to "Face unlock"/ "Pattern"/"PIN"/ "Password".
Lock instantly with power key	Set to activate screen lock by pressing  It appears when you set screen unlock method to "Face unlock"/ "Pattern"/"PIN"/ "Password".
Vibrate on screen tap	Set to vibrate the terminal when unlocking the screen. It appears when you set screen unlock method to "Face unlock"/ "Pattern"/" PIN".
Owner information	Entered information is displayed on the lock screen. It appears when you set screen unlock method to other than "None".

Item	Description
Encryption	
Encrypt device*	Set to ask to enter password each time you turn ON the terminal.
Encrypt SD card*	Encrypt a microSD card to prevent it from being used with other terminals or PCs.

Item	Description
Find my mobile	
Remote controls	Allow remote phone lock, wipe data and phone tracking. For details, refer to http://www.samsungdive.com . → P.298
SIM change alert	Send SMS to other mobile phone when docomo mini UIM card is changed (P.297).
SamsungDive web page	Display the homepage of SamsungDive.
SIM card lock	
Set up SIM card lock	→ P.292
Passwords	
Make passwords visible	Set whether to display entered characters on password entry screen.

Item	Description
Device administration	
Device administrators	Set whether to enable Device administrators.
Unknown sources	Set whether to permit installation of applications other than ones provided by Google Play.
Credential storage	
Trusted credentials	Display trusted certificates.
Install from device storage	Install encrypted certificates from USB storage.
Clear credentials	Delete all certification data and passwords.

* Set screen unlock method (P.293) to "password" to set this function. Set 6 or more alphanumeric characters in "password".

Security codes used on the terminal

Some functions provided for convenient use of the terminal require the security code to use them. Besides a password for screen lock of the terminal, a network security code necessary for the network services etc. are available. Make use of the terminal using an appropriate security code according to the purpose.

- Entered PIN/password for screen lock, network security code, PIN code and PUK code are shown as "●".

■ Notes on the security codes

- Avoid using a number that is easy to guess, such as "birth date", "part of your phone number", "street address number or room number", "1 1 1 1", and "1234". Make sure to make a note of the security code you set lest you should forget it.
- Be very careful not to let others know your security code. If your security code is known by anyone else, DOCOMO shall have no liability for any loss due to any unauthorized use of it.
- If you forget security codes, you should bring your official identification (such as driver's license), the terminal, and docomo mini UIM card with you to the nearest docomo Shop. For details, contact the "docomo Information Center" on the last page of this manual.
- The PUK code is written on the subscription form (copy for customer) handed at the subscription in the docomo Shop. If you have subscribed at other than docomo Shop, you should bring your official identification (such as driver's license), the docomo mini UIM card with you to the nearest docomo Shop or contact "docomo Information Center" on the last page of this manual.

PIN/password for screen lock

The security code is used for lock function of the terminal.

Network security code

The network security code is a 4-digit number necessary for identification or using the docomo Network Services at reception of your request in docomo Shop or at docomo Information Center. It can be set any number at the subscription and also changed later by yourself.

You can change your network security code to the new one using the PC if you have a "docomoID/Password" for General support site for PC "My docomo"*.

You can change by yourself from dmenu.

Operate dmenu → "お客様サポートへ (To Customer support)" → "各種お申込・お手続き (Various application/Procedures)". (In Japanese only)

* For "My docomo" and "お客様サポート (Customer support)" (In Japanese only), see back side of the back cover.

PIN code

You can set security code, named PIN, for the docomo mini UIM card. This code are set to "0000" at the time of subscription. They can be changed by yourself.

PIN is a 4- to 8-digit number (code) that must be entered for user confirmation to prevent unauthorized use by a third party every time you insert the docomo mini UIM card into the terminal or when the terminal is powered on. You can set entering the PIN code enables making/receiving calls and terminal operations.

- If you use newly purchased the terminal with the docomo mini UIM card you used inserted, use the set PIN code on the former terminal.
- If you enter a incorrect PIN code three consecutive times, the PIN code is locked and you cannot use the code. In this case, enter "PIN Unblocking Key" (PUK) to unlock and then set PIN code again.

Enter PUK (8 digits) → "OK" → Enter a new PIN code → "OK" → Enter PIN code again → "OK".

PUK code

The PUK code is an 8-digit number for canceling the locked PIN code. The PUK code cannot be changed by yourself.

- If you enter a incorrect PUK code 10 consecutive times, the docomo mini UIM card is locked. If it locked, please contact a docomo Shop.

Setting PIN code

You can set to require the PIN code entry for using the terminal when the power is turned on.

- 1** From the Home screen,  → "Settings" → "Security" → "Set up SIM card lock" → Mark "Lock SIM card" → Enter current PIN code → "OK"
"Lock SIM card" is marked.

Changing PIN code

- 1** From the Home screen,  → "Settings" → "Security" → "Set up SIM card lock" → Mark "Lock SIM card" → Enter current PIN code → "OK"
"Lock SIM card" is marked.
- 2** "Change SIM PIN" → Enter the current PIN code and a new PIN code according to the onscreen instructions

Setting unlock method for the screen lock

You can set to require unlock operation which specified in advance to unlock the screen lock.

- 1** From the Home screen,  → "Settings" → "Security" → "Screen lock"
- 2** Select unlock method → Enter according to onscreen instructions
 - Set "PIN" with 4 or more numbers; set "password" with 4 or more characters including alphabets.

Information

- To set the screen lock to OFF, from the Home screen,  → "Settings" → "Security" → "Screen lock" → Operate/Enter unlocking method that is set → "None".
- When you fail entering unlock pattern, PIN or password 5 times*, a message indicating re-entry after 30 seconds appears.

* Patterns connecting 3 dots or less or PIN/password entry within 3 digits are not counted.

If you forget unlock pattern, tap "Forgot pattern?" on the re-entry screen and sign in to Google account previously set on the terminal or enter backup PIN entered when setting unlock pattern to unlock the screen. Note that you cannot unlock the screen lock if you forget PIN, password, or backup PIN.

- When you set face unlock/pattern/PIN/password as unlock method, detailed setting items appear. If "With swipe lock" in the advanced settings is marked, tap  before performing unlock operation.
- When setting Face unlock, hold the terminal in front of your face to fit your face in the displayed frame.

Lock screen options

Set shortcuts, clock, etc. to be displayed on the unlock screen. Set unlock method to "Swipe/Touch", or set other than "None" and mark "With swipe lock" to select.

- This function is enabled on the unlock screen when the home selection is set to "TouchWiz home".

Item	Description
Shortcuts	Set to display shortcut icons on the unlock screen.
Information ticker	Set to display ticker information on the unlock screen.
Camera quick access	Set to activate the camera by touching and holding the screen on the unlock screen and tilting the terminal.
Clock	Set to display the clock on the unlock screen.
Dual clock	Set to display the dual clock on the unlock screen while roaming.
Weather	Set to display weather forecast on the unlock screen.

Item	Description
Ripple effect	Set ripple effect (effect that wave pattern appears when touching the screen) to be displayed. • If "Live wallpaper" is set to the unlock screen, Ripple effect is disabled.
Help text	Set to display help text on the unlock screen.

Enabling SIM change alert

You can set to send the replaced docomo mini UIM card phone number and the terminal information to the specified phone number via SMS when the docomo mini UIM card is replaced to another miniUIM.

1 From the Home screen,  → "Settings" → "Security" → "SIM change alert"

2 Set Samsung account

- Follow the onscreen instructions.
- Sign in if you have already had a Samsung account.

3 Tap 

4 "Alert message" → Enter message displayed in SMS → "OK"

5 "Create" → Enter the phone number for SMS recipient → "OK"

Enter "+" at the beginning and then country code, phone number without leading "0".

- Japanese country code is "81".
- Tap "Contacts" to select a recipient from the registered contacts.

6 "Save"

Enabling remote function

Lock and track the device, or delete the data remotely.

1 Set Google account

2 Set Samsung account

- Set Samsung account according to the onscreen instructions.
- Sign in if you have already had a Samsung account.

3 From the Home screen,  → "Settings" → "Security" → "Remote controls"

4 Tap <http://www.samsungdive.com>

5 After logging in by the Samsung account, follow the onscreen instruction to make settings.

* Since "Remote controls" automatically turns ON if Google and Samsung accounts are registered, they do not need to be operated via terminal. Perform starting from Step 4.

Language and input

You can set the language, input method, Google voice search and Text-to-speech function.

Item	Description
Language	Set language to use.
Keyboards and input methods	
Default	Set input method.
Google voice typing	→ P.123
Samsung Japanese keypad	→ P.117
Samsung keyboard	→ P.121
Speech	
Voice search	
Language	Set language to enter for Google voice search.
SafeSearch	Set adult filter for images and text.
Block offensive words	Hide search result including improper words.

Item	Description
Speech	
Text-to-speech output	
Google Text-to-speech Engine*	Set a sound synthesizing engine for reading text.
Samsung TTS*	Set Samsung TTS
Speech rate	Set text reading speed.
Listen to an example	Playback sample of audio synthesis.
Mouse/trackpad	
Pointer speed	Set a pointer speed when using mouse/trackpad.

* Japanese is not supported.

Back up and reset

You can set back up or restoration of Google application or reset the terminal.

Item	Description
Backup and restore	
Back up my data	Back up the settings, data etc. of Google application to Google server.
Backup account	Set an account for backup.
Automatic restore	Restore backed up settings and data when reinstalling application.
Personal data	
Factory data reset	Reset the terminal to the default. • Data saved in microSD card cannot be deleted. To delete them, perform "Format SD card" (P.62).

System

Dock

Item	Description
Dock sound	Set whether to sound when attaching/removing the terminal to/from the dock.
Audio output mode	Set to enable external speakers when the terminal is connected to the doc.
Desk home screen display	Set to show the desk home screen when the terminal is connected to the doc.

Date and time


By default, "Automatic" (download date and time information from network automatically and adjust) is set. To set date and time manually, unmark "Automatic date and time" in advance.

Item	Description
Automatic date and time	Adjust date and time automatically according to online settings.
Automatic time zone	Set time zone automatically.
Set date*	Set date.
Set time*	Set time.
Select time zone	Set a time zone.
Use 24-hour format	Switch clock to 24-hour format.
Select date format	Switch format of year, month and date.

* When Google account is set, date and time information may be adjusted automatically.

Accessibility

You can set User support applications which sounds or vibrates according to operation for ending calls or user's operation.

Item	Description
System	
Auto-rotate screen	Switch to portrait/landscape view according to orientation of the terminal automatically.
Speak passwords	Set whether to read out entered password using TalkBack.
Call answering/ending	Set whether to answer a call by pressing  or to end call by pressing  .
Accessibility shortcut	Set whether to add the accessibility shortcuts on the terminal option screen appeared when  is pressed for 1 second or longer.
Screen timeout	Set time until screen display turns off.

Item	Description
Services	
TalkBack	Enable user accessibility such as service with which sound or vibration responds to your operations and text-reading service.
Vision	
Install Web scripts	Set whether to install script which allows you to easily access web contents from an application.
Negative colors	Invert screen color.
Font size	Set font size in the screen.
Hearing	
Mono audio	Change audio to monaural for easy listening with one earphone.
Turn off all sounds	Turn OFF all sound including receiver volume.
Mobility	
Tap and hold delay	Set time for touching and holding the touch screen.

Information

- You can download compatible applications such as Kick back, Sound back from Google Play to set.
- If allow the use of "Services" (TalkBack) , note that private informations such as credit card number or user interface will be recorded. NTT DOCOMO is not liable for any loss of the registered data or information.

Developer options

You can set options for application development.

About device

You can check information such as phone number, battery level, legal information, etc.

Item	Description
Software update	→ P.456
Status	View battery level, phone number, etc.
Legal information	
Open source licences	Check license agreement of open source.
Google legal	Check the terms of use of Google.
Licence settings	DivX® VOD: Check or cancel the registration code. → P.308
Model number	View model number
Android version	View software version
Baseband version	
Kernel version	
Build number	

Checking your own phone number

- 1 From the Home screen,  → "Settings" → "About device" → "Status"

Your phone number is displayed in "My phone number".

Checking DivX® VOD register key

DivX® VOD register key is a registration key to be required for playing DivX® VOD (Video on Demand) files.

For registration etc., refer to <http://vod.divx.com>.

- 1 From the Home screen,  → "Settings" → "About device" → "Legal information" → "Licence settings" → "DivX® VOD" → "Register"

A register code appears.

File management

My files

You can display or manage various data such as still images, videos, music or document saved on the terminal or microSD card.

- 1** From the Home screen,  → "My files"
- 2** Tap a folder you want to use → Tap a file

A selected file is displayed/played.

Menu of My files

The following items appear when tapping  .

Item	Description
Create folder	Create new folders.
Delete	Delete folders/files.
Search	Search for files.
View by	Set display mode in list.
Sort by	Change order in list.
Share via	Share files using online services, send files via Bluetooth or attaching to mail, or use files on other applications.
Move	Move folders/files.
Copy	Copy folders/files.
Rename	Rename folders/files.
Settings	Set whether to display hidden files or file extensions. Or set home directory.

Bluetooth

You can transfer data between the terminal and Bluetooth device wirelessly.

- For Bluetooth compatible version or profile, see "Main specifications" (P.461).
- For setting or operations, refer to the user manual of Bluetooth device to connect.
- This terminal does not connect wirelessly with all types of Bluetooth devices.

■ Notes on using Bluetooth function

1. Connect the terminal to the other Bluetooth device within 10 m of vistaed distance. Depending on the environment (wall, furniture, etc.) or structure of building, available distance for connecting may be extremely small.
2. Keep more than 2 m away from the other device (electronic products, AV equipment, OA equipment etc.) and connect it. Always keep more than 3 m away from a microwave oven because it strongly affects the connection when it is operated. If it is near, the connection may not be established properly when the other device power on. Or the connection may cause noises on TV or radio or the image may be distorted.

■ Reception interference caused by wireless LAN devices

This terminal's Bluetooth device and wireless LAN devices use the same frequency band (2.4GHz). If you use the terminal near a wireless LAN device, reception interference may occur or the communications speed may lower. Also, you may hear noise or have a connection problem. In these cases, do the following:

1. Keep the Bluetooth device over 20 m away from a wireless LAN device.
2. Within 20 m, turn off either the Bluetooth device or the wireless LAN device.

■ Bluetooth pass code

Pass code is an authentication code to enter when accessing Bluetooth devices for the first time to recognize and permit the connection each other. Entering the same pass code (up to 16 Half-width alphanumeric characters) on each sending/receiving device is required.

- On this terminal, pass code may be displayed as "PIN".

Enabling Bluetooth function and making your terminal detectable

- 1 From the Home screen,  → "Settings" → "Bluetooth"
- 2 Tap 
- 3 Tap 
- 4 "Visible time-out" → **Select an item**
 - Your terminal can be detectable by another Bluetooth device within a set time.
 - When "Never timeout" is set, your terminal can be detectable always by another Bluetooth device.

To name your terminal

Tap "Device name" → Enter a name → Tap "OK".

Information

- When you do not use Bluetooth function, turn it OFF to save the battery.
- The setting of the Bluetooth ON/OFF is not changed even when the power is turned off.

Pairing/Connecting with a Bluetooth device

To transfer data between your terminal and other Bluetooth device, perform pairing with the device and register it to the terminal beforehand. And then perform connection.

- Depending on Bluetooth device, only pairing may be performed or pairing and connection may be performed successively.

1 From the Home screen,  → "Settings" → "Bluetooth"

2 Tap 

Detected Bluetooth devices are displayed by list.

- If no Bluetooth devices are displayed, tap "Scan" to re-search.

3 Tap a device you want to connect

4 Confirm a pass code → "OK" or enter pass code (PIN) → "OK"

- Even for devices requiring entry of pass code when pairing, once pairing is performed, entering pass code is not necessary for next connection.

When the other device requests for pairing

- When pairing request for Bluetooth communication screen appears, tap "OK" or enter a pass code (PIN) → "OK".

Canceling the connection

- On the Bluetooth device list, tap a connected device → Tap "OK".

Canceling the pairing

- 1 From the Home screen,  → "Settings" → "Bluetooth"
- 2 Tap 
- 3  of a device you want to cancel → "Unpair"

Sending/Receiving data via Bluetooth

- Set the Bluetooth function to ON beforehand to be detectable.

Sending data via Bluetooth

You can send data of Contacts (contact data in vcf format) or files such as still images or videos, etc. to a device (PC etc.) compatible with Bluetooth.

- For sending, perform the operation from the menu such as "Share"/"Send" of each application.

Receiving data via Bluetooth

1 If "Bluetooth authorization request" screen appears, tap "Accept"

 appears on the status bar and data reception starts.

- Reception condition can be checked by the notification panel.
- After completion of the reception, display notification panel and tap "Bluetooth share : Received" to display the list of received data. Tap data you want to view/play, you can check received data.


PC connection

Connecting with USB cable SC02

When you connect the terminal with PC via USB cable SC02, you can synchronize data with "Samsung Kies" (P.318) on a PC, or recognize the terminal as media device (P.319).

- 1** Insert microUSB plug of USB cable SC02 into the external connection jack and connect the terminal to a PC

Insert the microUSB plug with facing  printed side up horizontally.

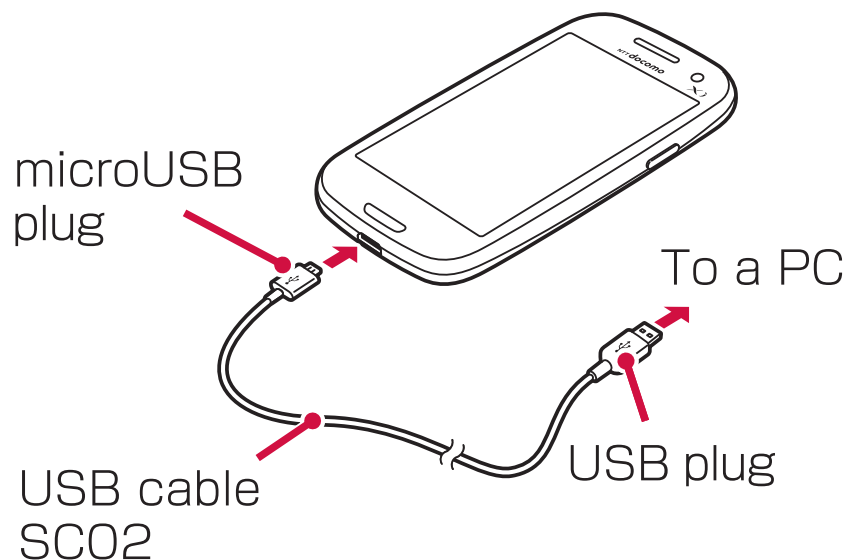

Information

- Connect the USB plug of USB cable SC02 directly to the USB connector of a PC. If you connect it via USB hub or USB extension cable, it may not work properly.
- Do not remove USB cable SC02 while data is transferred. It may cause damage of data.
- The connectable OS are Windows XP, Windows Vista (32/64bit) and Windows 7(32/64bit).
- To remove the terminal from a PC, perform safe removal procedure of the terminal on the task tray on the PC. If you do not perform the safe removal procedure, data saved in the terminal may be damaged.

Using Samsung Kies

Data such as contacts, music, video can be synchronized with the terminal, and the software of the terminal can be updated by using Samsung Kies.

- You can download Samsung Kies from Samsung's homepage and install it into your computer. For more information, see Samsung's homepage.

1 Connect the terminal with computer by USB cable SC02

- For connecting method, see "Connecting with USB cable SC02" (P.317).

2 Start up "Samsung Kies" on a PC

- For how to use Samsung Kies, refer to "Kies チュートリアル"(Kies Tutorial) of the help menu.

Using as media device

Connect the terminal and a PC with USB cable SC02. The terminal is recognized as a media device (MTP) and you can transfer media files such as music or videos.

1 Connect the terminal to PC via USB cable SC02

- For connecting method, see "Connecting with USB cable SC02" (P.317).

2 Open the notification panel → Check if "Connected as a media device" is displayed

- When "Connected as a camera" is displayed, "Connected as a camera" → Mark "Media device (MTP)".

3 Operate the PC to transfer data between the terminal and the PC

Using as camera device

Connect the terminal and a PC with USB cable SC02 and turn to camera (PTP) mode. You can transfer still images and videos to the PC.

- Use Camera (PTP) mode for transferring data to a PC etc. that is not compatible to MTP.

1 Connect the terminal and a PC with USB cable SC02.

- For connecting method, see "Connecting with USB cable SC02" (P.317).

2 Open the notification panel → "Connected as a media device" → Mark "Camera (PTP)"

3 Operate PC to transfer data between the terminal and the PC

AllShare Play

Share files with online storage and other devices in AllShare Play.

- To use AllShare Play, you need to set Samsung account.
- Depending on device type, some file may not be played.

Setting AllShare Play

1 From the Home screen,  → "AllShare Play" → "Start"

- If a notification screen about mobile networks appears, tap "OK".
- If your Samsung account is not set, tap "Sign in" to sign in to your Samsung account.

2  → "Settings" → Set the followings

Item	Description
Web storages	Manage online storage.
Devices	Manage device.
Setting up web services	Sign in to web service account.
Auto Upload photos from mobile	Make settings for uploading still images or videos shot by the terminal automatically to online storage.

Item	Description
Video quality settings	Set whether to play videos in quality most suitable to the device.
Lock AllShare Play	Lock AllShare Play.
Language	Select language.
About	Display detail information of AllShare Play.
Contact Us	Connect to the Inquiries.

Uploading files in the terminal to online storage or other device

- 1** From the Home screen,  → "AllShare Play"
- 2** Tap the terminal from "Devices"
- 3** Tap a file type tab → Tap  of files to upload
 - Uploading files are marked.
- 4**  → Tap uploading destination
 - Uploading starts. To cancel uploading, tap "Cancel".

Playing files in online storage or other compatible device with the terminal

- 1** From the Home screen,  → "AllShare Play"
- 2** From "Web storages" or "Devices", tap a storage or device for playback
 - If any storage or device is not displayed, tap  → "Refresh" to scan again.
- 3** Perform operation to play the file on the terminal

Information

- Depending on network connection or status of recipient device, play may be interrupted.

Application

dmenu

In the dmenu, you can quickly access DOCOMO recommended sites and useful applications.

- 1 From the Home screen,  → "dmenu"
 - The browser is activated and "dmenu" is displayed.

Information

- To use dmenu, Internet connection by packet communication (LTE/3G/GPRS) or Wi-Fi is required.
- For connecting dmenu and downloading applications introduced by dmenu, a packet communication charge is applied separately. Some downloaded applications automatically perform packet communications.
- Applications introduced by dmenu may include charged ones.

You can pick up useful and interesting contents which meet your needs at dmarket.

- For details of dmarket, refer to NTT DOCOMO's website.

1 From the Home screen, → "dmarket"

- For the first activation, an agreement appears. Read the contents and then mark "Agree" and then tap "Start use".

Play Store

- To use Google Play, you need to set Google account.

Installing an application

- 1** From the Home screen,  → "Play Store"
 - When you activate for the first time, the Terms of Service appears. Tap "Accept".
- 2** Search for an application you want to download, then tap it → Check details
- 3** For free applications, "Download" → "Accept & download", for charged ones, tap price → "Continue" → "Accept" → Follow the onscreen instructions

When the completion of downloading and installing,  appears in the status bar.

- Be very cautious about applications that have access to many functions or a significant amount of your data. Once you operate to download, you are responsible for the results of using the application on the terminal.

Information

- Be sure to check the security of application, and then install it at your own risk. The terminal may be infected with a virus and the data may be damaged.
- NTT DOCOMO is not liable for malfunctions, if any, caused by the application you installed. In such case, the repair is charged even during the warranty period.
- NTT DOCOMO is not liable for any disadvantage brought to you or any third party due to an application you installed.
- Some applications automatically perform packet communications. Packet communication is kept active unless you disconnect it or the time-out is occurred.
- If you are not satisfied with the purchased application, you can ask for refund within the specified time frame. Note that refund is accepted only once for each application.
- For detail of Google Play, on the Google Play screen,  → Tap "Help" to refer to Google Play Help.
- For instructions on uninstalling application, see "Uninstalling applications" (P.149).

Samsung Apps

You can download a lot of applications Samsung recommended easily using Samsung Apps.

Opening Samsung Apps

- 1** From the Home screen,  → "Samsung Apps"
 - When you activate for the first time, the disclaimer appears. Read it and tap "Accept".
- 2** Search an application you want to use and download it

Information

- Samsung Apps may not available depending on the country or region. For details, on the Samsung Apps screen,  → Tap "Information" → "Samsung Apps" to refer to the support page in the Samsung Apps site.

Osaifu-Keitai

Osaifu-Keitai equipped with IC card is a function which allows you to pay money or to use coupon, stamp-rally, etc. only by holding the terminal over an IC card reader in stores etc. You can access a site or website, obtain the latest coupon, check credit or payment of electronic money, etc. by holding the terminal over the IC card reader. In addition, you can lock your Osaifu-Keitai to provide against loss or theft, and you can use Osaifu-Keitai with safe.

- For details on Osaifu-Keitai, refer to "ご利用ガイドブック (spモード編) (Mobile Phone User's Guide [sp-mode]) (in Japanese only)".
- A setting from the dedicated website or application is required to use Osaifu-Keitai compatible services.
- The data (including electronic money, points, etc.) in the IC card may be lost or modified because of the malfunction of the terminal (When we take your Osaifu-Keitai for repair etc., as we cannot take it with data remained, you are required to erase the data by yourself). For support such as reissuance, restoration, temporary preservation or transfer of data, contact Osaifu-Keitai compatible service providers. For important data, be sure to use a service with backup service.

- If the data in the IC card is lost, modified or damaged by any means related to Osaifu-Keitai compatible service such as malfunction or model change, DOCOMO assumes no responsibility for the loss of data.
- If the terminal is stolen or misplaced, immediately contact Osaifu-Keitai compatible service provider for an advice.
- Attach the battery pack SC07 when using Osaifu-Keitai. FeliCa antenna is equipped with the battery pack SC07.

Using Osaifu-Keitai

To use Osaifu-Keitai compatible service, download Osaifu-Keitai compatible application from Osaifu-Keitai compatible site before setting up. Depending on service, Osaifu-Keitai compatible application does not require to be downloaded.

1 From the Home screen, → "Osaifu-Keitai"


- Obtain service information and update a service list.
- If you did not perform Osaifu-Keitai initial settings in "Initial settings" (P.86), Initial settings screen appears. Follow the onscreen instructions.

2 Tap service you want to use

3 Configure settings for service

Holding Osaifu-Keitai over IC card reader

You can exchange data by holding  mark over an IC card reader.

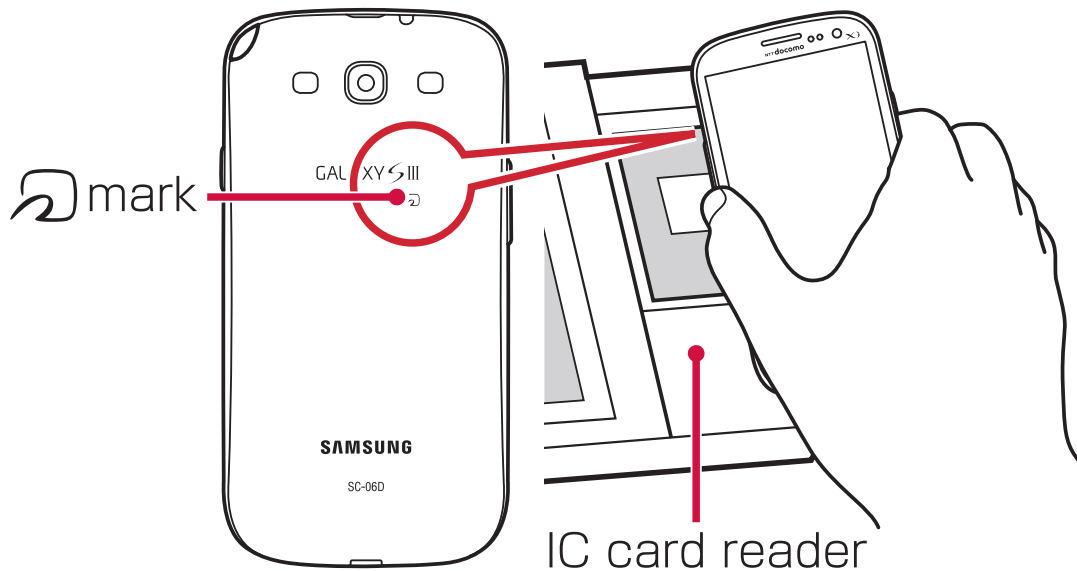

Please note the followings when holding Osaifu-Keitai over an IC card reader

- Do not hit the terminal on the IC card reader
- Hold the  mark over the IC card reader horizontally
- Hold the  mark over the center of the IC card reader slowly as possible
- If not recognized by the IC card reader, move the  mark back, forth and around
- Do not attach metal objects etc. to the  mark side

Locking Osaifu-Keitai function

You can lock to prevent using Osaifu-Keitai service. If you lock, you cannot obtain data with the IC card reader.

1 From the Home screen,  → "Osaifu-Keitai"

2 "Lock Settings" → Enter a new password → Enter the password again → "OK"

- If a password is already set, "Lock Settings" → Enter password → Tap "OK".

To unlock

"Lock Settings" → Enter password → Tap "OK".

To change password

"Lock Settings" → "PW Change" → Enter a password → Enter a new password → Enter the password again → Tap "OK".

ToruCa is an electronic card that can be obtained to mobile terminals. It can be obtained from the IC card reader or site as store information, coupon ticket, etc. Obtained ToruCas are saved to the "ToruCa" application, which can be displayed, searched, and updated using "ToruCa" application.

- For details on ToruCa, refer to "ご利用ガイドブック (spモード編) (Mobile Phone User's Guide [sp-mode]) (in Japanese only)".

1 From the Home screen, → "ToruCa"

- For the first activation, an agreement appears. Read the contents and then tap "同意する (Agree)".

Information

- For obtaining, displaying or updating ToruCa, a packet communication charge may be applied.
- Some ToruCa provided for i-mode terminals may not be obtained, displayed, or updated by your phone.
- Depending on the settings of IP (Information Provider), the following functions may not be available.
Obtaining/Updating from the IC card reader, sharing ToruCa, moving/copying to a microSD card, displaying map

- Some ToruCa which can display a map from ToruCa (details) may not display a map from the ToruCa list depending on the IP settings.
- While using Osaifu-Keitai lock settings, you cannot obtain ToruCa with an IC card reader.
- If you mark "重複チェック (Duplication check)", obtaining the same ToruCa redundantly is not available. To obtain the same ToruCa redundantly, in the ToruCa list screen,  → "More" → "設定 (Settings)" → Unmark "重複チェック (Duplication check)".
- When ToruCa is sent via mail, it is sent in the condition before obtaining ToruCa (details).
- Depending on the mail application, ToruCa received via mail may not be saved.
- Via some browsers, ToruCa cannot be obtained.
- When ToruCa is moved, copied to microSD card, it is moved or copied in the condition before obtaining ToruCa (details).
- If initial setting for Osaifu-Keitai is not made, you cannot obtain ToruCa with an IC card reader.

1 Seg

1 Seg is a terrestrial digital TV broadcasting service for mobile devices and enables these devices to receive data broadcasts in addition to video and audio broadcasts. It allows users to obtain more detailed information about TV programs and to readily participate in quiz shows and enjoy TV shopping and other contents.

For details, see Website below.

The Association for Promotion of Digital Broadcasting Website:

<http://www.dpa.or.jp/>

Notes on using 1 Seg

1 Seg is a service provided by TV broadcasters (broadcast stations), etc. Transmission charges are not incurred for receiving image, audio, and sound.

For details on NHK viewing fees, contact NHK.

The data broadcast area displays two types of information: "Data broadcasting" and "data broadcasting web site"

"Data broadcasting" information is carried in a broadcast wave, together with image, audio, and sound.

"Data broadcasting web site" information is used to access sites provided by the TV broadcaster (broadcast station).

Packet communication charges are incurred when accessing a site such as a "data broadcasting web site" or others.

Some sites require information charges to use.

Airwaves


1Seg is a broadcasting service that operates on radio waves (airwaves) different from those for the FOMA service. Therefore, you cannot receive the 1Seg service in locations that airwaves cannot reach or during hours when program is not available, regardless of whether you are outside of inside the FOMA service area. Even in areas where the terrestrial digital TV broadcasting service is available, you may have poor or no reception in the following places:

- Place far away from a tower that transmits airwaves
- Place in a mountain area or behind a building where radio waves are blocked by land or structural features
- Inside a tunnel, underground, inner area of a building or other place where radio waves are weak or nonexistent

To get good reception, fully extend the antenna for the 1Seg service. Changing the orientation of the antenna, moving the terminal away from or closer to your body, or moving to another location may result in better reception.

1 Seg antenna

Do not change the direction of the antenna with excessive force.

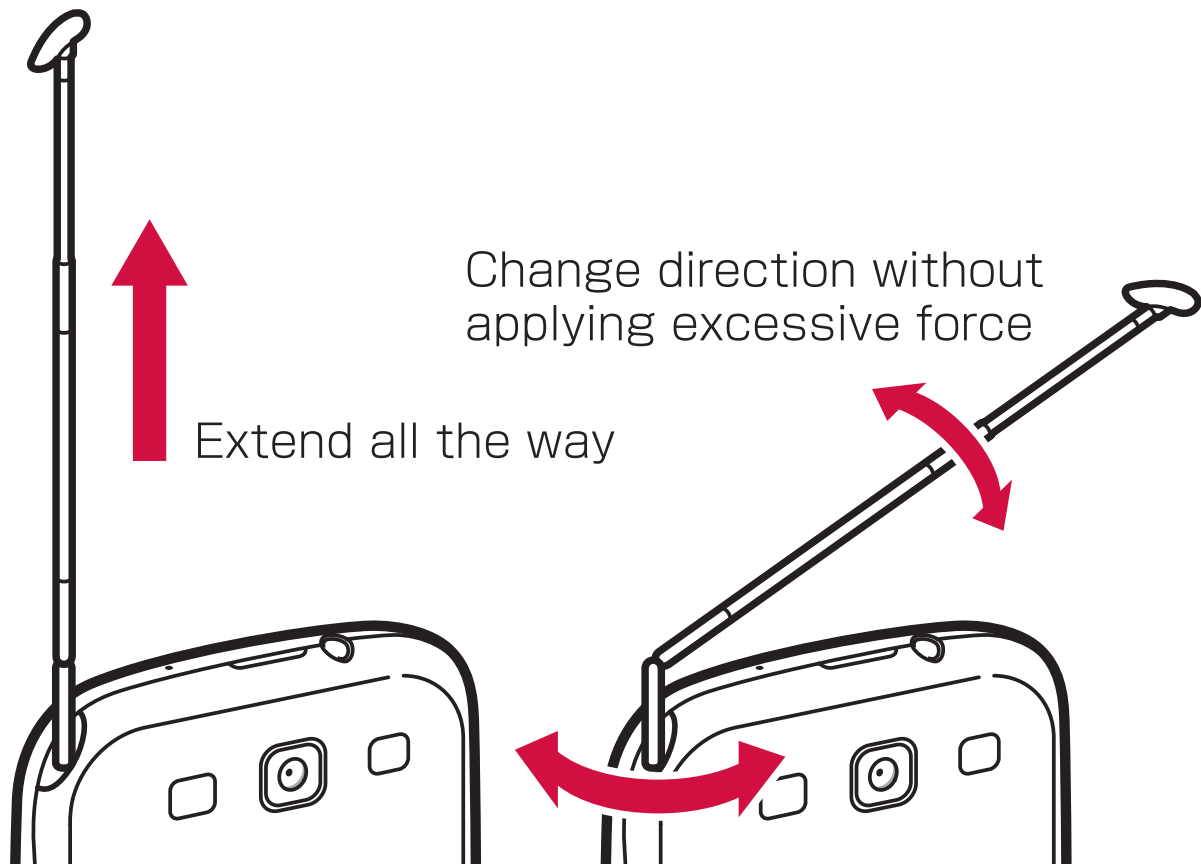

Information

- When using the 1 Seg antenna, pull the antenna out fully. The antenna may be broken if excessive force is applied without fully pulled out.
- When storing the 1 Seg antenna, hold the root of the antenna and retract it until it stops. Do not retract the antenna by holding the tip.

Watching 1 Seg

1 From the Home screen, → "Mobile TV"

Watching screen (P.340) appears.

- If the operation screen appears, tap any of TV preview, channel, and "TV full view" to display watching screen.
- When the first activation or if the channel area is not registered, set channel area (P.352).

Information

- According to the airwave status, the images and sounds may be interrupted.
- When watching 1 Seg, you cannot set to mute sounds automatically with the "Turn over to mute/pause" (P.83), "Palm touch to mute/pause" (P.83) functions, but you can mute sounds manually using .
- Depending on the volume setting (P.263), sound may be reproduced even though the Silent mode is set. In such a case, adjust volume with .


Transferring to Bluetooth headset

- 1** On the watching screen, tap  → "Transfer to BT headset"
 - If Bluetooth function is OFF, a notification for turning Bluetooth ON appears. Tap "OK" to turn ON.
- 2** Tap a device to connect
 - If the device is not visible, "Scan" → Tap the device to connect.
- 3** Enter pass code (PIN) → "OK", if required

Information

- Available only for SCMS-T compatible Bluetooth headset.

Watching screen

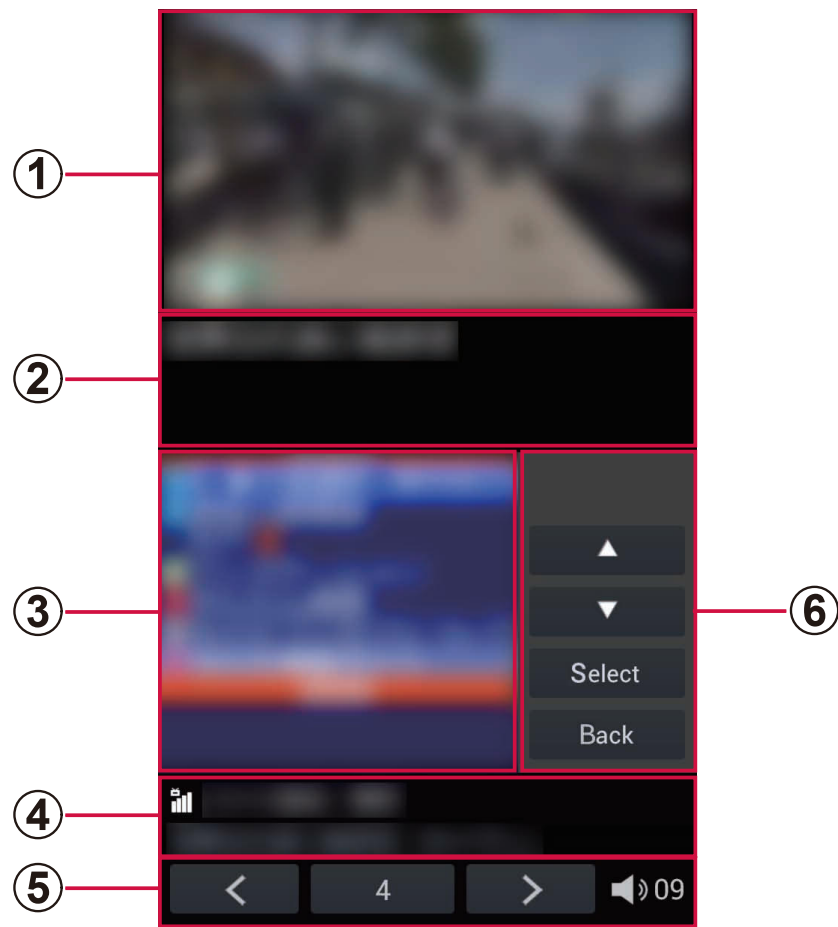

Watching screen

① Image

- Channel can be switched by flicking to the left or right.
- Details of the program displays by touching and holding the image.

② Subtitle

-  → "Settings" → "Display Settings" → Mark "Caption" to show subtitles.


③ Broadcast data

④ Channel/Program name

⑤ TV operation panel

- Channel can be switched with  / .
- "Ch. list" tab of the operation screen appears by tapping the number of the channel.
- Adjust the volume with .

⑥ Operation panel for broadcast data

- Adjust the cursor with  /  and select an item tap "Select" to select an item. The broadcast data of the link displays.
- Tap "Back" to return to the previous linked program.

■ Key operations on viewing screen


- Lock the screen with  (Power/screen lock key).
- Adjust the volume with  (Volume key).

Operation screen

1 On the watching screen, tap a channel number

2 Tap a tab at the top of the screen

Ch. list

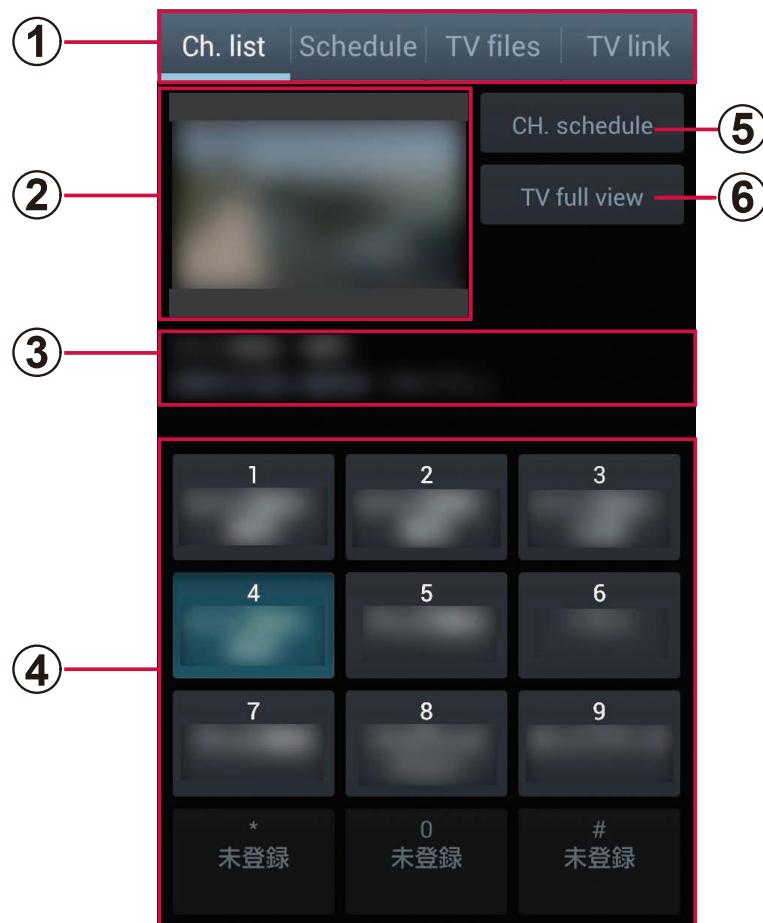

Operation screen (Ch. list tab)

- ① Tab**
 - Switch the operating target by tapping the tab.
- ② Preview image**
 - The watching screen appears by tapping it.
- ③ Channel/Program name**

④ Channel list

- Watching screen appears by tapping the channel.
- Channel can be deleted from the Channel list by touching and holding the channel → Tap "Delete".

⑤ Program list

- The watching program list appears by tapping it.


⑥ TV full view

- The watching screen appears by tapping it.

■ Key operations on Ch. list tab

- Adjust the volume with  (Volume key).

Schedule tab

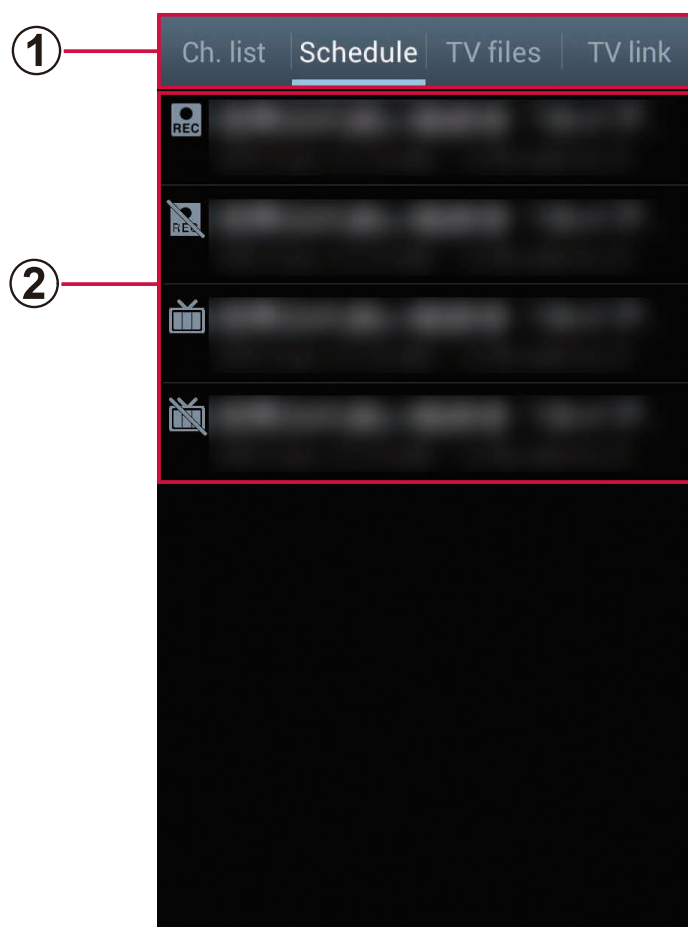

Operation screen (Schedule tab)

① Tab

- Switch the operating target by tapping the tab.

② Schedule list



: Recording schedule (including the completed schedule)



: Watching schedule (including the completed schedule)




: Failed recording schedule




: Failed watching schedule

- Change the schedule by tapping the unexecuted schedule.
- Delete the schedule by touching and holding the unexecuted schedule → Tap "Delete".
- Confirm the result and delete the schedule from the list by tapping the executed schedule.

TV files tab

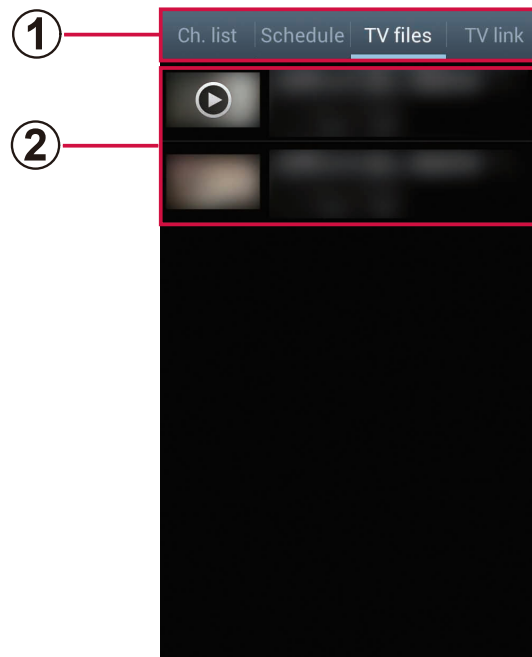

Operation screen (TV files tab)

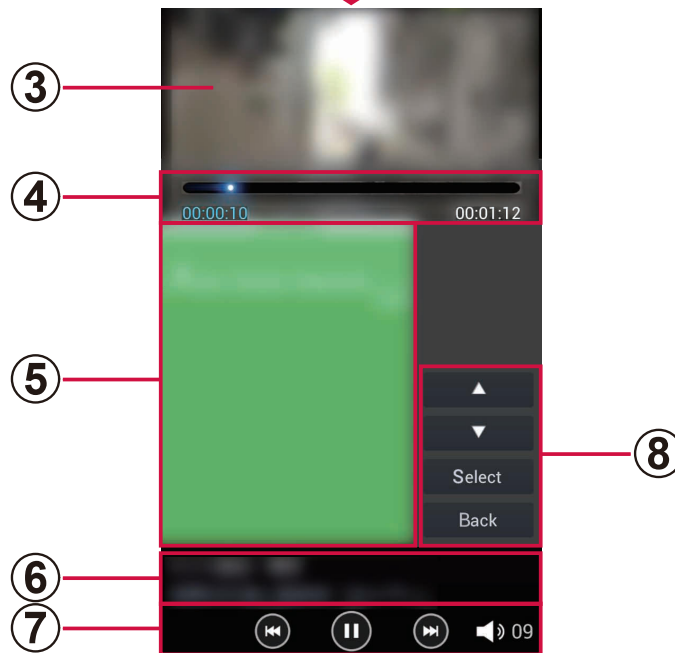

Playing file screen

① Tab

- Switch the operating target by tapping the tab.

② TV file list

- Play or display TV file by tapping it.

③ Image

- TV file to be played can be switched by flicking to the left or right.

④ Play time, slider

- Tap video screen to display.
- Change any time point of the file to be viewed with .

⑤ Broadcast data

⑥ Channel/Program name

⑦ Play operation panel

- TV file to be played can be changed with  / .
- Play/Pause the TV file with  / .
- Adjust the volume with  09.


⑧ Broadcast data operation panel

- Adjust the cursor with  /  and select an item with "Select". The broadcast data of the link displays.
- Tap "Back" to return to the previous linked program.

■ Key operations on the playing file screen

- Lock the screen with  (Power/screen lock key).
- Adjust the volume with  (Volume key).

TV link tab

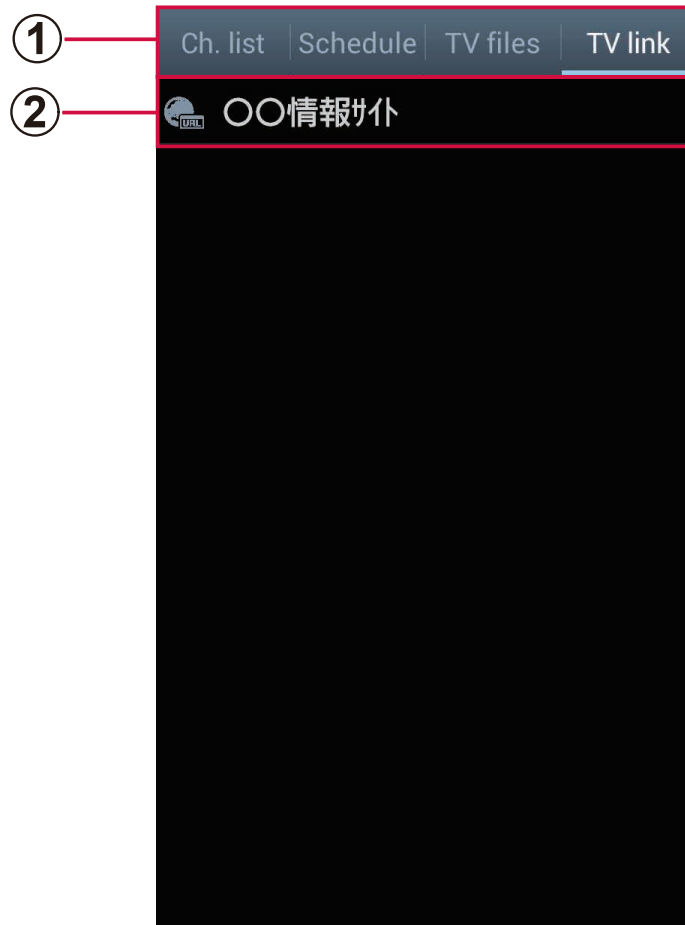

Operation screen (TV link tab)

① **Tab**

- Switch the operating target by tapping the tab.

② **TV link**

- Connect to registered site (P.354).

Recording 1 Seg

1 On the watching screen,  → "Record"

- To stop recording, tap "Stop".

Information

- According to the airwave status, the images and sounds may be interrupted.
- During recording, channel cannot be changed.
- If you activate any other application during recording, the program may not be recorded correctly.

Playing recorded programs

1 On the watching screen,  → "TV files"

2 Tap a program to be played

Capturing the watching screen

- 1 On the watching screen,  → "Capture"
 - Captured images can be checked in "TV files" tab on the operation screen.

Reserving to record or watch 1 Seg

Reserving from channel schedule

- 1 On the watching screen, tap a channel number
 - "Ch. list" tab of the operation screen appears.
- 2 "CH. schedule" → Tap the program to be scheduled
 - Channel can be changed by tapping the channel name on the top of the screen.
 - Detail of the program can be confirmed by tapping the program.
- 3 "Schedule" → "Schedule to record"/
"Schedule to watch"

Reserving from G-Guide program list

- 1** On the watching screen,  → "Launch EPG"
 - For the first activation, an agreement appears. Read the contents and then tap "利用規約に同意する (Agree with Terms of Use)". Then perform "地域設定 (Select regions)".
- 2** Select a program from the G-Guide program list, "ワンセグ連携 (link to 1Seg)" → "ワンセグ録画予約 (1Seg recording reservation)"/"ワンセグ視聴予約 (1Seg watching reservation)"
- 3** Confirm/Change each items at the New program reservation screen
 - Details of the item can be changed by tapping it.
- 4** Tap 

Scheduling manually

- 1** On the watching screen, tap a channel number
 - "Ch. list" tab of the operation screen appears.
- 2** "Schedule" tab
- 3**  → "Schedule manually"
- 4** Enter each items on New program reservation screen
- 5** Tap 

Deleting reservations

- 1** On the watching screen, tap a channel number
 - "Ch. list" tab of the operation screen appears.
- 2** "Schedule" tab
- 3** Touch and hold the reservation to be deleted
- 4** "Delete" → "OK"

Setting channels

Setting area information

- 1** On the watching screen, tap a channel number
 - "Ch. list" tab of the operation screen appears.
- 2**  → "Set area information" → Select the area to be registered
- 3** Select regions → Select province → Select local area

Channels are searched and the selected area is registered to the channel list.
- 4** "OK"

Switching area information

- 1** On the watching screen, tap a channel number
 - "Ch. list" tab of the operation screen appears.
- 2**  → "Change area" → Tap the area to be switched
 - When the area to be switched to is not registered to the channel list, area information is set (P.352).

Deleting area information

- 1** On the watching screen, tap a channel number
 - "Ch. list" tab of the operation screen appears.
- 2**  → "Set area information" → Touch and hold the area to be deleted
- 3** "Reset"

Using TV link

Registering TV link

- 1** Operate broadcast data and select the item which can be registered to TV link

The registration method of TV link varies depending on each program.

Information

- TV link may not be registered depending on each link.

Displaying TV link

- 1** On the watching screen, tap a channel number
 - "Ch. list" tab of the operation screen appears.
- 2** "TV link" tab
- 3** Select a TV link

Connect to the registered website.

Deleting TV link

- 1** On the watching screen, tap a channel number
 - "Ch. list" tab of the operation screen appears.
- 2** "TV link" tab
- 3** Touch and hold the TV link to be deleted
- 4** "Delete" → "OK"

Setting Mobile TV

- 1** On the watching screen,  → "Settings"
- 2** Set the items

Item		Description
Display Settings	Brightness	Adjust the screen brightness.
	Frame interpolation	Set whether to perform frame interpolation.
	Caption	Set whether to display subtitles.

Item		Description
Audio Settings	Audio effects	Select audio effects from 5 options.
	Audio language	Set sound to be heard for sound multiplex programs.
	5.1 Ch	Set whether to watch with 5.1 channel audio.
Save to		Set a saving location of recorded or captured data.
TV Off timer		Set time before stopping Mobile TV automatically.
Broadcast data	Set recording	Set to record image and text or only image.
	Image location	Set an image saving location.
	Notify connection	Set whether to check communication connection.
	Location	Set whether to check location information.
	Manufacture number	Set whether to notify serial number.
	Delete station data	Delete broadcasting data.

Camera

Copyrights and portrait rights

Avoid copyright infringements when you handle photos taken with your terminal, e.g. copy/alter/edit except for the purpose of personal use. Please refrain from unauthorized use of portraits or names of other persons that may infringe on portrait rights. Note that capturing or recording a stage performance, entertainment or exhibition may be prohibited even if for personal use.

If you cause the public any trouble using the terminal, you may be punished under law or regulations (for example, nuisance prevention ordinance).



Please be considerate of the privacy of individuals around you when taking and sending photos using camera-equipped mobile phones.


Before using Camera

- Though the camera is manufactured using extremely accurate technology, some dots and lines may always be displayed to be lighter or darker than you expect. Images shot under very low light intensity contain increased noise such as white lines or random dots, but it is not a malfunction.
- Note that, a stripe pattern may appear on the screen when Camera is activated, but it is not a malfunction.


- Still images or videos shot by Camera may differ from actual subjects in color and brightness.
- When attempting to take a photo of a strong light source such as the sun or a lamp, images may become dark or degraded.
- If the lens is contaminated with fingerprints or skin oil, you cannot shoot clear still images/videos. Use a soft cloth to remove any such contaminants on the lens before taking photos.
- When shooting, hold the terminal firmly with your hand not to move. Moving the terminal when shooting may cause blur shot images.
- Do not cover the lens with your finger or hair when shooting.
- Using Camera consumes much power of battery. Note that, if you shoot with low battery, the screen may become dark or a shot image may be blurred.
- If you use camera for a long time such as continuous shooting of still images and long-time shooting of videos, the terminal may become hot and camera may be terminated automatically, but it is not a malfunction. Please use after a while.
- Do not remove microSD card or battery pack forcibly immediately after capturing. It may not save correctly or may cause data corruption. If you want to remove microSD card or battery pack, turn off the terminal before removing.
- Even in Silent mode, shutter sound for still image shooting, focus sound and start/stop sound of shooting video sounds.

Shooting screen

1 From the Home screen,  → "Camera"

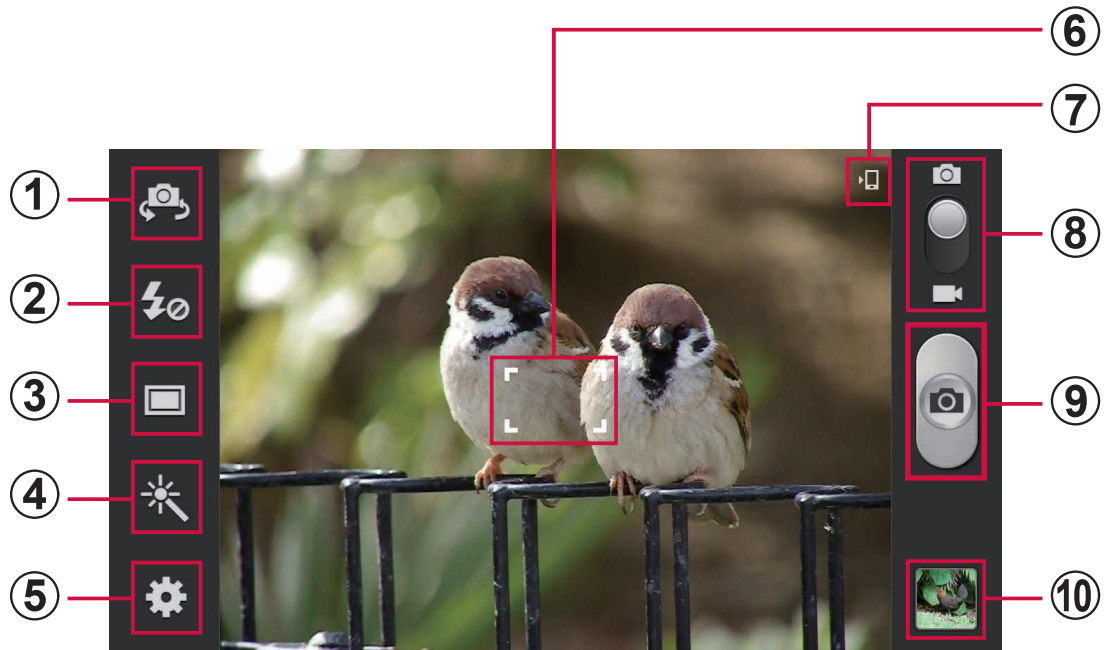

Still Image Capture Screen

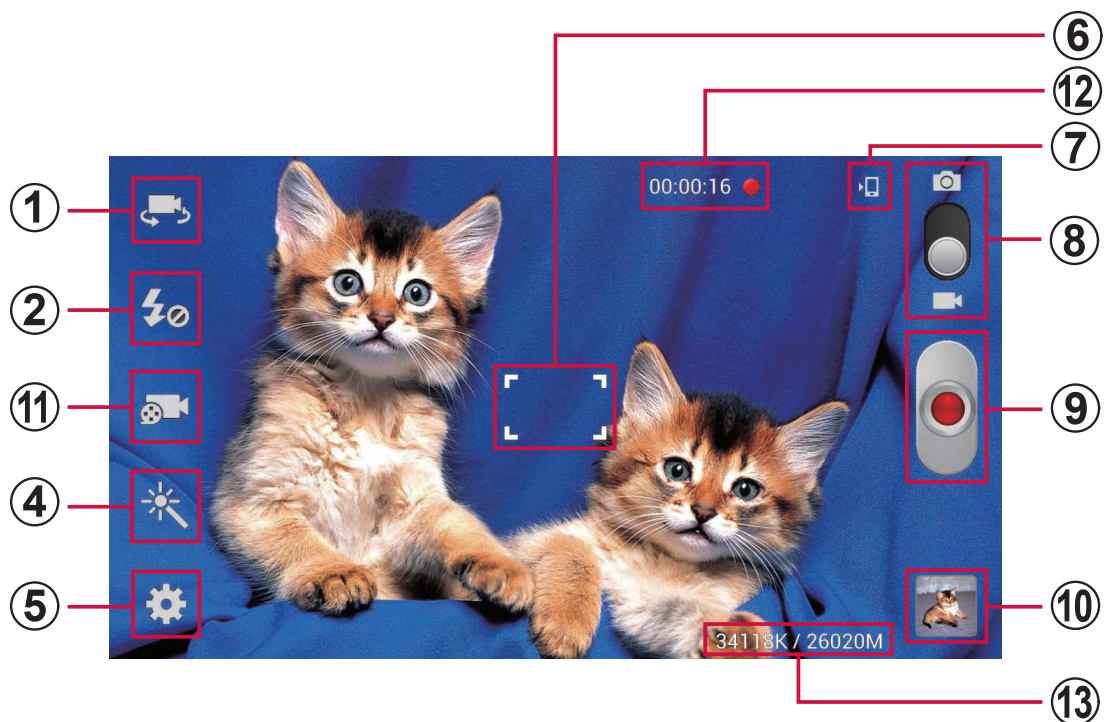

Video Recording Screen

- ① Switch between In-camera and Out-camera
- ② Set Flash
- ③ Switch shooting mode for still images
- ④ Set Effects

- ⑤ Setting
- ⑥ Focus
- ⑦ Saving location
- ⑧ Switch capturing still image mode and capturing video mode
- ⑨ Shutter
- ⑩ Thumbnail
 - Tap to activate Gallery.
- ⑪ Switch recording mode for video
- ⑫ Shooting time of videos
- ⑬ Data amount of shot video (bytes)/Available memory (bytes)

Information

- If no operation is performed with Camera activated for approximately 2 minutes, Camera ends.
- "Face detection", "Smile shot", "Beauty", and "Buddy photo share" are compatible with Face detection.

Setting before shooting

- 1** From the Home screen,  → "Camera"
- 2** On the still image/video shooting screen,  → **Set required items**
Some items may not be set together.

Item	Description
Edit shortcuts	Add up to 4 shortcuts for frequently used setting menus on the left.
Self-portrait* ¹ / Self-recording* ²	Capture image with in-camera.
Flash	Whether to use flash when capturing images.

Item	Description
Shooting mode* ¹	
Single shot	Capture still images.
Burst shot	Shoot continuously. - Storage for the shot images are switched to "Phone". - Set Best photo to "On" to shoot 8 images by one tap of shutter. Touch and hold an image from among the 8 thumbnails to display  → Tap "Done". - Set Best photo to "Off" and touch and hold the shutter to shoot up to 20 images. All shot images are saved.
HDR	Shoot in HDR (High Dynamic Range) mode. Both HDR image and normal image are saved.
Face detection	Detect face of object and shoot.
Smile shot	Detect and capture a smile.
Beauty	Detect a face and capture it with a bright face effect.
Panorama	Capture maximum 8 still images and make them into a panorama picture.

Item	Description
Shooting mode ^{*1}	
Cartoon	Add an effect of illustration and capture.
Share shot	Share shot images with the other party connected via Wi-Fi Direct.
Buddy photo share	Detect an object from a shot image to send email if the detected person is registered in Phonebook.
Recording mode ^{*2}	
Normal	Shoot usual videos.
Limit for email	Shoot images in suitable size for e-mail attachment.
Scene mode ^{*1}	Set mode suitable for the scene such as portrait shooting or night scene shooting.
Exposure value	Set exposure value.
Focus mode ^{*1}	Set focus mode.
Timer	Set self-timer.
Effects	Shoot images with special effect.
Resolution	Select resolution (size) for shooting.

Item	Description
White balance	Select lighting condition on shooting to correct color shade.
ISO ^{*1}	Set ISO sensitivity.
Metering ^{*1}	Set photometry.
Anti-Shake	Set anti-blur function to be valid/invalid.
Auto contrast ^{*1}	Set auto-adjustment of contrast to be valid/invalid.
Guidelines	Set whether to display a guideline on the shooting screen.
Image quality ^{*1}	Set image quality when shooting still images.
Video quality ^{*2}	Set image quality on shooting videos.
GPS tag ^{*1}	Set whether to add location information on still images.
Storage	Select saving location of shot still images/videos.
Reset	Reset Camera settings.

*1 Appears only for still image settings.

*2 Appears only for videos.


3 After setting, tap somewhere on the screen or tap 

Shooting still images

1 From the Home screen,  → "Camera"
Still image capture screen appears.

2 On the still image shooting screen, point Camera at an object

- You can adjust zooming by pressing  or widening/narrowing your fingers distance on the display.

3 

Shutter sound sounds and then an image is shot. The shot still images are automatically saved.

- Touch and hold  when shooting to keep fixing the focus on an object in auto-focus frame. Release your finger to capture.

Information

- Shot still image is saved in JPEG format.

Shooting videos

- 1** From the Home screen,  → "Camera"
Still image shooting screen appears.
- 2** Drag  of  to 
Mode is switched to video shooting mode.
- 3** **Point Camera at an object** → 
Start sound sounds and shooting video starts.
 - You can adjust zooming by pressing  or widening/narrowing your fingers distance on the display.
 - Tap  to shoot still images while shooting video. If "Anti-Shake" (P.364) is set to "On", this function is not available.
- 4** **To stop shooting,** 
Stop sound sounds and video is saved automatically.

Information

- Before shooting video, check if the memory space is enough.

Gallery

You can view or organize still images/ videos saved to this terminal or microSD card. Supported format are as follows. However, even if in the following file format, some images or some videos may not be displayed/played.

Type	Format
Still image	JPEG, PNG, GIF, BMP, WBMP, AGIF
Video	H.263, H.264, MPEG-4, Divx, WMV, VC-1, VP8

1 From the Home screen, → "Gallery"

A folder list screen appears.

- Tap  to activate Camera.

2 Tap a folder

A data list screen appears.

Viewing still image

1 On the data list screen, tap a still image to display

The still image is zoomed in.

- To switch still images, scroll the screen to the left or right.
- The following icons appear when tapping the screen.

Item	Description
	Share still images using online services, send data via Bluetooth or attaching to mail, or use data on other applications.
	Set "Effect", "Music", "Speed" and tap "Start" to start slideshow.
	Delete still images.

Playing video

1 On the data list screen, tap a video to play

2 → Select player

Playing starts.

- If playing video with "Media Player", see "Using Media Player" (P.370) for icons or operations.

- If playing with "Video player", see "Using Video player" (P.372) for icons or operations.

Menu of Gallery

When you tap  on the folder/data list screen, the following items appear.

Item	Description
Select album ^{*1} / Select item ^{*2}	Tap multiple folders/data to select, and then operate collectively. • To select all folders/data, tap "XX selected" → "Select all". • Tap  to share data using online services, send data via Bluetooth or attaching to mail, or use data on other applications. • Tap  to delete folder/data. • Tap  to check details of folder/data, rename folder/data, slideshow, edit images. Available functions vary depending on the selected folder/data.
View by ^{*1} /Group by ^{*2}	Sort data in folder into groups by selected theme.

*1 Appears only on the folder list screen.

*2 Appears only on the data list screen.

Information

- On the data list screen, tap a still image/video → Tap  to show the operation menu.

Player

Using Media Player

You can play music or videos saved on the terminal or microSD card.
Available file formats for playing are as follows.
However, even if in the following file format, some songs and videos may not be played.

Type	Format
Music	AAC, HE-AAC v1 (aacPlus v1 / AAC+), HE-AAC v2 (aacPlus v2 / eAAC+/Enhanced AAC+/AAC++), MP3, MIDI, WMA
Video	H.263, H.264, MPEG-4, Divx, WMV, VC-1, VP8

- 1** From the Home screen,  → "Media Player"
- 2** "Songs"/"Artists"/"Albums"/"Movie"/"Store"

Appear result corresponding to tapping tab.

- If you tap "Artists"/"Albums", tap Artist name/Album name to display song name.

- If you tap "Store", dmarket activates and you can purchase contents such as music, videos, etc.

3 Tap a music or a video to play

Playing music or video starts.

Item	Description
	Indicate the current play position. Drag left and right to change the play position. * When playing back music, tap screen and icon appears.
 *1 /  *2	Display data list.
 *1 /  *1	Set whether to switch to portrait/landscape view according to orientation of the terminal automatically (switch automatically ON/OFF).
 / 	Play/Pause.
 / 	Tap to skip to data top/next data.
 *2 /  *2 /  *2	Set repeat mode (No repeat/All repeat/Repeat the track).
 *2 /  *2	Set shuffle function (Shuffle OFF/ON).
	Display the volume level. Drag left or right to adjust the volume.

*1 Appears only for playing video screen.

*2 Appears only for playing music screen.

Using Video player

You can play videos saved on your terminal or microSD card.

Available file formats for playing are as follows.
However, even if in the following file format, some videos may not be played.

File format
H.263, H.264, MPEG-4, Divx, WMV, VC-1, VP8

1 From the Home screen,  → "Video player"

2 "Thumbnails"/"List"/"Folders"

3 Tap a video

Playing starts.

- The following icons appear when tapping the screen.

Item	Description
 / 	Adjust the volume.
	Switch vertical/horizontal display. * Appears when "Auto-rotate screen" (P.84) is set to OFF.
	Indicate the current play position. Drag left and right to change the play position.
 /  / 	Switch view size of video.

Item	Description
	Decrease the playing screen size. You can play videos while operating other applications. * This function is available only when playing video with "Video player".
	Play/Pause.
	Tap to skip to data previous/next data. Touch and hold to rewind/fast forward.
	In Playback screen press  to toggle to Lock screen. The screen does not react to tapping.

Information

- Tap  while playing video, "Press the back key again to return to previous screen" appears. Tap  with message displayed to return to video list.

Menu of Video player

When you tap  on the list screen/play screen, the following items appear.

■ List screen

Item	Description
Share via	Share videos in online service or send via Bluetooth or by mail attachment etc.
Delete	Delete videos.
Search video	Search videos.
List by	Change order of the list.
Auto play next	Set whether or not all videos automatically play back.

■ Play screen

Item	Description
Share via	Share videos using online services, send data via Bluetooth or attaching to mail.
Chapter preview	Display chapters in thumbnail view.
Trim	Crop a video.
Via Bluetooth	Output voice sound to Bluetooth device.
Video auto off	Set time duration for ending playback automatically.
Settings	Make settings such as playback screen brightness, playback speed, SoundAlive, etc.

Item	Description
Details	Display details of data.

Using Music player

You can play music saved on your terminal or microSD card.

Available file formats for playing are as follows. However, even if in an available file format, some tune may not be played.

File format
AAC, HE-AAC v1 (aacPlus v1 / AAC+), HE-AAC v2 (aacPlus v2/eAAC+/Enhanced AAC+/AAC++), MP3, MIDI, WMA

1 From the Home screen, → "Music player"

For the first activation, "All" screen appears.


2 Select tabs at the top of the screen → Tap data you want to play

Playing starts.

Item	Description
Artist name/ Title/Album name	Tap to show details.
 / 	Adjust the volume.
 / 	Set shuffle function (Shuffle ON/OFF).

Item	Description
	Set repeat mode (All repeat/Repeat the track/No repeat).
	Display music square. • Music square automatically creates playlists analyzing characteristics of songs. Tap the square at the top of the screen to play songs having similar characteristics. • If a playlist is not created automatically, tap  → "Library update".
	Indicate the current play position. Drag left and right to change the play position.
	Play/pause.
	Tap to skip to data previous/next data. Touch and hold to rewind/fast forward.
	Set SoundAlive.
	A list screen/playing screen appears.

Information

- When Stereo Headset with Microphone (sample) is connected (P.162), press switch to activate "Music player" and play music. While the "Music player" is activated, you can switch play/pause each time you press the switch. Volume can be adjusted with the volume key.
- Even when the screen lock is set during music play, the play continues. To operate, press  to display the unlock screen and unlock screen. If playing music in the background, open the notification panel to play music/pause music/skip to the next or previous track.

Creating playlist

- 1** From the Home screen,  → "Music player" → "Playlists"
- 2**  → "Create playlist"
- 3** Enter a playlist name → "OK"
- 4** "Add music" or  → "Add"
Song list appears.
- 5** Mark a song to add → "Done"
Song is added to created playlist.

Editing playlist

- 1** From the Home screen,  → "Music player" → "Playlists"
- 2** Tap a playlist you want to edit
The contents of the playlist appear.
- 3**  → Tap an item

Adding tune to quick list

You can register a playing tune to Quick list. It is useful for registering favorite tune without stopping the play.

- 1** From the Home screen,  → "Music player"
- 2** Tap a tab at the top of the screen → Tap data you want to add

3 → "Add to quick list"

Registered tune is added to "Quick list" of "Playlists".

To register as playlist

From the quick list screen,  → "Save as playlist" → Enter playlist name → "OK"

Menu of Music player

When you tap  on tab screen for selecting the music classification/playing music, the following items appear.

■ Tab screen for selecting the music classification

Item	Description
Add to playlist	Add a song to the playlist.
Create playlist	Create a new playlist.
Delete	Delete songs.
Edit title	Edit playlist name.
Thumbnail view/ List view	Switch view type of songs.
Search	Search a song.
Help	Display Help of Music square.
Library update	Update library of Music square.

Item	Description
Change horizontal axis	Change horizontal axis type of Music square.
Settings	Set SoundAlive or playing speed etc.
End	Exit Music player application.

* Available functions vary by tab screen.

■ Play screen

Item	Description
Add to quick list	Add a song to quick list. • For songs already added to quick list, "Go to quick list" appears. Tap to switch to quick list view.
Via Bluetooth	Play a song connecting to a Bluetooth device.
Share music via	Share songs using Wi-Fi Direct etc., send songs via Bluetooth or attaching to mail.
Add to playlist	Add a song to the playlist.
Details	Display detail information of song.
Set as	Set a song to "Phone ringtone", "Caller ringtone", "Alarm tone".

Item	Description
Settings	Set SoundAlive, Play speed, etc.
End	Exit Music player application.

Enabling location information

If you use an application that uses location information, you need to enable GPS function in advance. You can set for detecting location information more accurately using Wi-Fi/Mobile network or the motion sensor.

1 From the Home screen,  → "Settings" → "Location services"

2 Mark a detection method

Item	Description
Use wireless networks	Identify location information using Wi-Fi/mobile network.
Use GPS satellites	Detect location information more accurately. However, the terminal consumes much power of battery.
Location logs	Display location information log.
Location and Google search	Allow Google to use location information.

Precautions on using GPS

- Use the GPS system with great care. DOCOMO is not liable for any damage caused by abnormality of the system.
- Note that DOCOMO shall have no liabilities for any purely economic loss including those due to missing a chance to check the measurement (communication) results because of external factors (including the running out of the battery), such as a failure, malfunction, or any other problems of the terminal or the power failure.
- You cannot use the terminal as a navigation device for an aircraft, vehicle, and person. Note that DOCOMO shall have no liabilities whatsoever even if you suffer damage or loss while performing a navigation using the location information.
- You cannot use the terminal as a high-accuracy measurement GPS. Note that DOCOMO shall have no liabilities whatsoever even if you suffer damage or loss due to a deviation of the location information.
- GPS is a service operated by the USA Department of Defense, so the GPS radio wave condition may be controlled (accuracy degraded, radio wave suspended, etc.) for reasons of US national security. And, wave conditions differ by satellite locations; therefore, positioning operations in the same location under the same environmental conditions may not yield the same result.

- Some wireless communications products (mobile phone, data detectors and some others) block satellite signals and also cause instability of signal reception.
- Some map displays based on location information (latitude/longitude information) may be not accurate due to some countries' or regions' regulations.

■ Where radio waves are difficult to receive
Note that radio waves may not be received or it may be difficult to receive radio waves in the following conditions, since GPS uses radio waves from a satellite.

- Inside or immediately under a building
- Inside a basement or tunnel, and below the ground or water
- Inside a bag or box
- Building area or residential area
- Inside or under a thick covering of trees
- Near a high-voltage cable
- In a car, inside a train compartment
- Bad weather such as heavy rain or snow
- When there are obstructions (people or objects) near the terminal

Using Google Maps

By using Google Maps, you can search for the current location or other locations, or obtain guide information to destination.

- To use Google Maps, enable data connection (LTE/3G/GPRS) or connect to Wi-Fi.
- Google Maps does not cover the whole world or region.

Opening Google Maps

1 From the Home screen,  → "Maps"

Search by Google Maps

Use the "経路"(Route) function of Google Maps to set the location other than the current location as departure place, or search the route by car, by train or on foot.

1 From the Home screen,  → "Maps"

2  → Enter the place name in "End point : "field

- Tap , you could specify the destination by selecting from "Contacts", "Point on map", or "My Places".
- To change the start point, tap "My Location" field to enter name of place or tap  to select a place from "My current location", "Contacts", "Point on map", or "My Places".

3 Tap the locomotion strategy (/ /) icon

- If  is tapped, select search condition from "Best route", "Fewer transfers", "Less walking".

4 "NAVIGATION"/"GET DIRECTIONS"

Using Latitude

You can check where a friend is on the map and vice versa or send a mail. You can also make a call and search the route to the friend's current location.

- To share the location information, you need to join Latitude and invite friend whom gives your location information to, or to receive an invitation from friend.

1 From the Home screen, → "Latitude"

- When activating for the first time, notification appear. Tap "Share location with family or friends" → "Agree & Continue".
- When a map is displayed with Google Maps, tap "Maps" on the screen → "Latitude"/"Join Latitude".

2 "See map"

Information

- For detail of Latitude, on the Latitude screen,  → Tap "Help" to refer to Maps for mobile Help.

Using Navigation

You can check route to the destination using Google Maps.

1 From the Home screen,  → "Navigation"

- For the first activation, a usage precaution screen appears. Read it and tap "Accept".

2 "Type destination" → Enter name of destination, etc. in "Destination" field
→ Tap destination on the list

Route information appears.

- Input the destination by voice and search by the address set on Contacts are available.

Using Places

You can search restaurants, sightseeing spots, etc. in the current location area using Google Maps.

- 1** From the Home screen,  → "Places"
- 2** Tap a category you want to search → Tap information to check

If there is no category you want to search, tap  at the top of the screen, and enter desired search categories or shop names, etc. in keyword field → Tap .

To add a category,  → "Add a search" → Enter a category etc. → Tap .

Clock

You can use Alarm, World clock, Stopwatch, Timer or Desk clock.

- 1** From the Home screen,  → "Clock"
- 2** Tap a tab at top of the screen
Tapping switches screen of each function.

Using Alarm

- 1** On the "Alarm" screen, "Create alarm"
- 2** Enter time, Alarm repeat, Alarm type, volume, Alarm tone, Snooze, Smart alarm, Name → "Save"
- 3** To stop alarm, drag  to the outline of the displayed circle
When snooze is set, drag  to the outline of the displayed circle, then alarm sounds again after elapse of set time.

Information

- Snooze is a function which stops the alarm and sets it to ring again at a short time later.
- To delete registered alarm, on the "Alarm" screen, tap  → "Delete" → Mark an alarm to delete → Tap "Done". Alternatively, touch and hold an alarm → Tap "Delete".
- To make the set alarm OFF, tap  (Green)/ (Yellow) to switch to  (Gray).
- To set an alarm sound or vibration when the terminal is in Silent mode, on the "Alarm" screen, tap  → "Settings" → Set required items.

Using World clock

You can check date and time of registered to country/region by a list.

1 On the "World clock" screen, "Add city"

2 Tap a country/region to register

To sort country/region by time difference to search

Tap  → "By time zone". To return to the city name sort, tap  → "By name".

To search country/region with world map

Tap . To return to the country/region list, tap .

To register country/region from world map, tap country/region → tap .

Information

- To delete registered country/region, on the "World clock" screen,  → "Delete" → Mark a country/region to delete → Tap "Done". Alternatively, touch and hold country/region → "Delete" to delete.
- To set summer time to registered country/region, touch and hold a country/region → "DST settings" → Select item.

Using Stopwatch

- 1** On the "Stopwatch" screen, "Start"
Measurement starts.
To measure lap time
Tap "Lap".
- 2** To stop the measurement, "Stop"
To restart the measurement, tap "Restart"
and tap "Reset" to re-measure.

Using Timer

- 1** On the "Timer" screen, set hour,
minute, and second → "Start"
The timer starts.
To stop count down, tap "Stop", and to rest
timer, tap "Reset".
While stopping, tap "Restart" to restart
Timer.
- 2** To stop alarm sound, drag  to the
outline of the displayed circle

Using Desk clock

Check current time and date.

- 1** "Desk clock"
Tap  /  to zoom in/out the screen.


S Planner

Display Calendar to register event and task.
Set up a Google account to synchronize
with Google calendar and check events and
tasks registered from a PC.

1 From the Home screen,  →
"S Planner"

2 Tap 

- If a screen related to Google calendar synchronization appears, check and tap "Done".

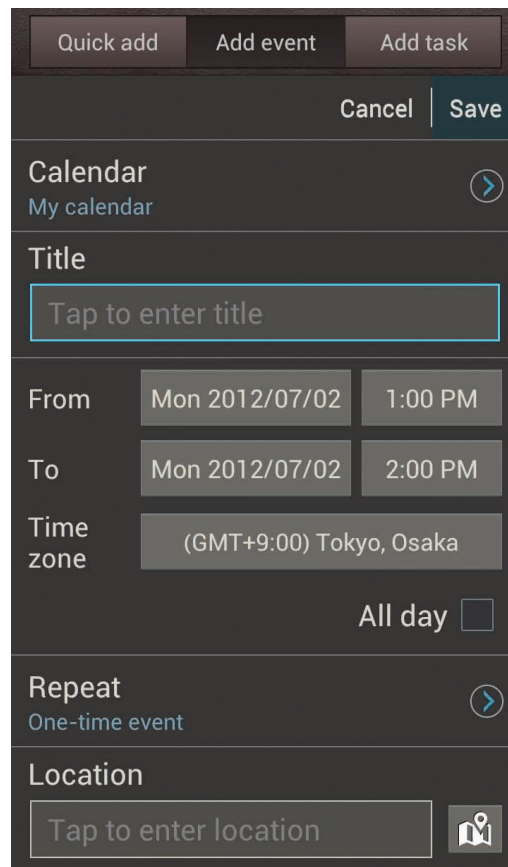

Register events screen

3 "Add event" or "Add task"


4 Set each item → "Save"

S memo

You can create memos and draw pictures. Add photos, or pictures to memos, also save recorded sound in memos.

Creating memos

- 1** From the Home screen,  → "S Memo"
S memo list screen appears.
- 2** Tap  or , or select a template to use from the list → Tap the screen
You can edit a memo.

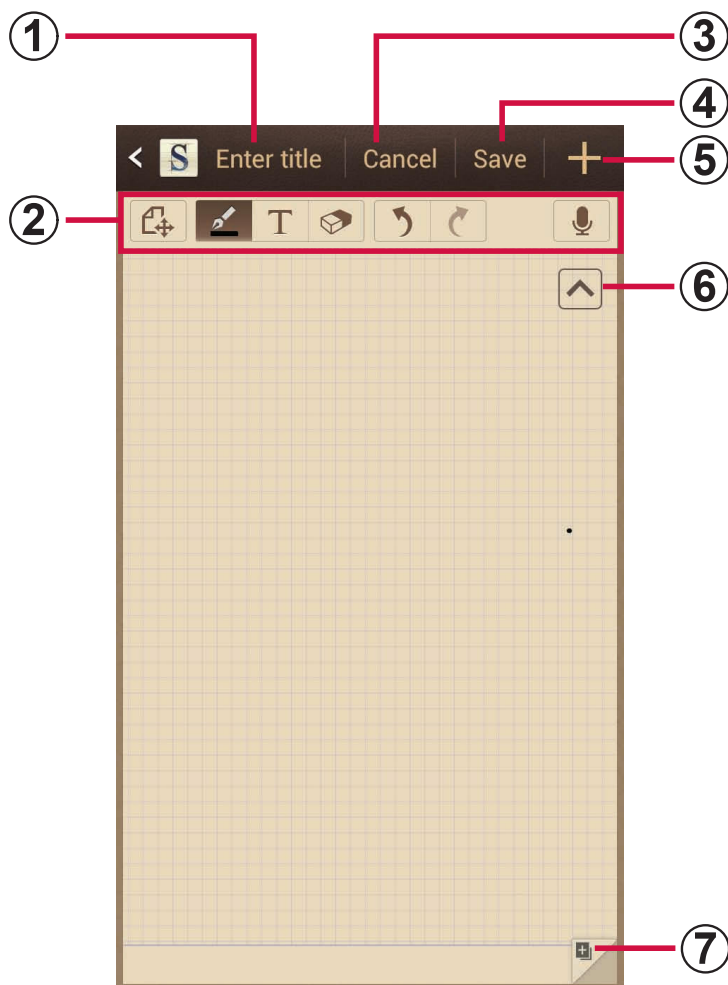

S memo creation screen (example)

① **Enter title**

- Enter title.

② **Toolbar**

 : Save entered content and go into the view mode.

 : Select pen type, thickness and color.

 : Use keypad to create memos.

 : Change eraser setting or completely erase memo.

 : Undo.

 : Restore.

 : Record audio attached to memos.

③ **Cancel**

- Tap "OK" to discard editing memo and return to the S memo list screen.

④ **Save**

- Save editing memo and return to the S memo list screen.

⑤ **Create new**

- Save editing memo and create another memo.

⑥ **Show/Hide toolbar**

 : Display toolbar.

 : Hide toolbar.

⑦ **New page**

- Create new memo page. New memo cannot be created on an empty memo screen.

3 Create memos → "Save" or .

Information

- To mark a specific memo as a favorite, tap a memo to mark in S memo list screen → Tap .

Menu of S Memo

Tap  on S memo list screen/S memo creation screen to show the following items.

■ S memo list screen

Item	Description
Search	Search for S memos.
Delete	Delete S memos.
Sort by	Change list display sequence.
View by list/View by thumbnail	Switch data display format.
Share via	Share S memos using online services, send memos via Bluetooth or attaching to mail.
Export	Export created S memo as gallery images and PDFs.
Sync	Synchronize S memo to Google document or Evernote.
Create folder	Create new folders.

Item	Description
Rename	Change the title of a S memo.
Move	Move S memos.
Copy	Copy S memos.
Lock	Apply PIN lock so that others cannot check or edit contents.
Unlock	Unlock PIN for S memo.
Print	Using a printer manufactured by Samsung to print S memo. • As of June, 2012, there are no printers that use this features in Japan.

Item	Description
Settings	
Auto sync	Set whether to perform auto-synchronization.
Change PIN	Set so that the terminal cannot be used unless PIN is input.
Screen timeout	Set time until screen display goes blank.
Handwriting language update	Update languages which can convert handwriting character to text. • By default, only hand-written characters of symbols, numbers, alphabets, Korean, Japanese can be converted into texts. • For Japanese, only hiragana and katakana can be converted as of June, 2012.
Auto hide toolbar	Set whether to automatically show or hide toolbar.
Tutorial	Shows descriptions regarding how to use S memos.

■ S memo creation screen

Item	Description
Rename	Rename created S memos.
Share via	Share S memos using online services, send memos via Bluetooth or attaching to mail.
Handwriting-to-text	Convert hand-written characters, symbols or numbers into text. • By default, only hand-written characters of symbols, numbers, alphabets, Korean, Japanese can be converted into texts. • For Japanese, only hiragana and katakana can be converted as of June, 2012.
Export	Export created S memos as gallery images and PDFs.
Sync	Synchronize S memo to Google document or Evernote.
Save as	Save created S memo as a new file.
Add picture	Add an image.
Add tag	Add tag information to S memos.
Add as favorite	Mark as a favorite.
Change background	Change background format.

Item	Description
Link to S Planner	Activate S Planner, register a creating S Memo as an event or task, or check a registered S Memo.
Lock/Unlock	Apply PIN lock so that others cannot check or edit contents.
Set as	Save as contact images, and home screen/home screen lock wallpapers.
Print	Using a printer manufactured by Samsung to print S memo. • As of June, 2012, there are no printers that use this features in Japan.

Voice recorder

Recording voice sound

- 1** From the Home screen,  → "Voice recorder"
- 2** Tap 
Recording starts.
 - To pause the recording, tap , or to start the recording, tap .
 - To cancel the recording, tap  → "OK".
 - When  is tapped while recording, the recorded content until the tapping are saved and then the Voice recorder ends.
- 3** Tap 
Stop recording and save data.

Playing the voice sound

- 1** From the Home screen,  → "Voice recorder"
- 2** Tap 
 - A recorded data list screen appears.
- 3** Tap data you want to play
Playing starts.
 - To pause the playing, tap , or to start the playing, tap , or to stop the playing, tap .

- To crop voice sound, while playing voice sound, tap  → "OK" → Drag the slider to the position you want to crop →  → Select save method for cropped data → Tap "OK".
- To adjust volume, tap .

Menu of Voice recorder

When you tap  on the list screen/playing screen, the following items appear.

Item		Description
Share		Share data using Wi-Fi Direct etc., send data via Bluetooth or attaching to mail.
Delete		Delete data.
Rename		Rename file.
Settings*	Storage	Select saving location.
	Default name	Set default file name.
	Recording quality	Set recording quality.

* Appears only for list screen.

Calculator

You can four arithmetic operations (+, -, ×, ÷), percent calculus, functional calculus, etc.

1 From the Home screen, → "Calculator"

Turning the terminal sideways switches to the alpha calculator.

- Tap  to display history.

Menu of calculator

Tap  to display the following items.

Item	Description
Clear history	Clear history.
Text size	Set character size.

Backing up SD card

You can move and back up phonebook entries, sp-mode mails, bookmarks, etc. using external media such as microSD card.

- Do not remove the battery pack or micro SD card from the terminal while backing up or restoring data. Data on the terminal may be damaged.
- When item name of contacts of another terminal (phone number etc.) is different from the terminal, the item name may be changed or deleted. And registered character may be removed because the characters that can be registered to phonebook vary by terminal.
- Phonebook data available to back up is phonebook saved in docomo account and the terminal.
- When backing up phonebook entries to microSD card, data without a name registered cannot be copied.
- Backup may not be performed if the microSD card does not have enough memory. In this case, delete unnecessary files to make available memory.
- Backup or restoration may not be performed if the battery level is low. In that case, charge the terminal then try to back up or restore again.
- When a microSD card is not inserted, data such as still images and videos are stored on the terminal. With this application, image data only stored on the terminal can be backed up. Data stored in microSD card cannot be backed up.

Backing up data

You can back up data such as phonebook entries, sp-mode mails, media files.

- 1** From the Home screen,  → "SD card backup"
 - For the first activation, an agreement appears. Read the contents and then tap "Agree".
- 2** "Backup" → Mark data to be backed up → "Start backup" → "OK"
- 3** Enter DOCOMO apps password → "OK"
 - Selected data is stored in microSD card.
- 4** "Back to top"

Restoring backup file to the terminal

You can restore data such as phonebook entries, sp-mode mails, media files.

- 1** From the Home screen,  → "SD card backup"
- 2** "Restore" → "Select" of data type to be restored → Mark data to be restored → "Select"
- 3** Select restoration method → "Start restore" → "OK"

- 4** Enter DOCOMO apps password → "OK"
 - Selected data is restored to the terminal.
- 5** "Back to top"

Copying phonebook entries saved in the Google account or the terminal to docomo account

Contacts saved in Google account phonebook and in "Contacts" application provided by Samsung can be copied to docomo account.

- 1** From the Home screen,  → "SD card backup"
- 2** "Phonebook account copy" → "Select" on the phonebook entry to be copied → "Overwrite"/"Add"
 - Copied data is saved to docomo account.
- 3** "OK"

Setting schedule to back up automatically

- 1** From the Home screen,  → "SD card backup"
- 2** "Periodical backup" → "Add schedule" → Mark "Schedule ON"
- 3** "Select" → Mark data to be backed up → "Select"

- 4 Select a repeat task → Set an execution time → "Enter"
- 5 "Set" → Enter password → "OK" → "OK"

YouTube

YouTube is a free online video streaming service. You can view or post video.

Playing video

- 1 From the Home screen,  → "YouTube"
- 2 Tap a video you want to play
Video is played.
 - Tap screen to switch pause/play.  appears while video is paused.
 - Turn the terminal side way to enlarge screen. The following icon appears when screen is enlarged.
 -  : Drag left or right to rewind/fast-forward.
 -  /  : Tap to set ON/OFF of high quality play.

Posting video

You can post video you shot from the terminal.

- To post videos to YouTube, you need to log in YouTube via Google account or YouTube account.

1 From the Home screen,  → "YouTube"

2  → Shoot video → "Save"
Uploading video screen appears.

When you do not sign in YouTube

On the displayed sign-in screen, tap an account or "Add account" → Log-in the existing account/Create new account following the onscreen instructions.

3 Enter/Set required items → "Upload"
Video will be uploaded.

Dictionaries

Use three foreign language dictionaries (Japanese, English, Korean) to search for words and phrases.

The following dictionaries are included at time of purchase.

- 旺文社英和辞典 (Obunsha English-Japanese Dictionary)
- 旺文社和英辞典 (Obunsha Japanese-English Dictionary)
- ニューエース韓日辞典 (NEW-ACE KOREAN-JAPANESE DICTIONARY)
- ニューエース日韓辞典 (NEW-ACE JAPANESE-KOREAN DICTIONARY)

1 From the Home screen,  → "Dictionary"

2 Enter a search word in the keyword entry field



Dictionary screen

- ① **Dictionary currently in use**
- ② **Change dictionary**
 -  : Switch type of dictionary.
 -  : Switch between "ENG-JPN"/"JPN-ENG" or "JPN-KOR"/"KOR-JPN".
- ③ **Search candidates list**
- ④ **Keyword input field**
- ⑤ **Voice search**
- ⑥ **Words and text**
 - Tap text or drag it to the left of the screen and search candidates list does not show. To show search candidates list again, drag text to the right of the screen.
- ⑦ **Special functions toolbar**
 -  : Highlight selected portions of text.
 -  : Change the font size of text.
 -  : Add memos to displayed words.
 -  : Save displayed words in flashcard.
- ⑧ **Switch contents of text display**

Dictionary menus

Tap  to show the following items.

Item	Description
Search*	Return to dictionary screen.
Flashcards	Show saved vocabulary lists.
History	Show search histories.
Settings	Customize fonts.
Help	Check dictionary app usage methods, notation rules, and product information.

* Appears flashcard and history screens.

Polaris Office

You can display/edit Office document etc. or create new one on the terminal.

If you have a Dropbox account, you can manage document online.

Compatible file types and versions are as follows.

- Some files with password are available only for viewing.

Type	Version	
	Create, edit	View
Microsoft Word	MS Word 97-2007 (.doc, .docx)	MS Word 97- 2010 (.doc, .docx, .dot, .dotx)
Microsoft Excel	MS Excel 97- 2007 (.xls, .xlsx)	MS Excel 97-2010 (.xls, .xlsx, .xlt, .xltx, .csv)
Microsoft PowerPoint	MS PowerPoint 97-2007 (.ppt, .pptx)	MS PowerPoint 97- 2010 (.ppt, .pptx, .pps, .ppsx, .pot, .potx)
Adobe PDF	—	V1.2-V1.7(.pdf)
Hansoft Hangul	—	HWP 97-3.0, 2002-2010 (.hwp)

Type	Version	
	Create, edit	View
Text	(.txt)	(.txt, .asc, .rtf)
Zip	—	(.zip)

Creating a new document

1 From the Home screen,  → "Polaris Office"

- The Polaris Office screen appears.
- For the first activation, user registration screen appears. To register, enter your mail address → "Register", or "Skip" not to register.

2  → Select a document type to create

3 Create a document

4  → Enter a file name → Select a folder path → "Save"

- Tap  to go back to the Polaris Office screen.

Displaying/Editing document

- 1** From the Home screen,  → "Polaris Office"
 - "Recent documents": Search from recently used documents.
 - "Browser": Search a document from a saving location.
 - "Clouds": Search documents saved in online storage.
 - "Form type": Search by document type.
 - "Favorites": Search from documents added to Favorites.

2 Tap a document to display/edit

International roaming

Overview of international roaming (WORLD WING)

The international roaming (WORLD WING) is a service that allows you to use the same phone number and Email address as ones used in Japan within the service area of overseas network operator that is associated with DOCOMO. You can use without changing of call and SMS settings.

■ Supported network

This terminal is a Class 4 device. You can use the terminal in 3G network and GSM/GPRS network service area. Services are also available in countries and areas supporting 3G850MHz/GSM850MHz. Check supported area. For areas out of Xi area such as overseas, connect to 3G or GSM/GPRS network.

■ Before using the terminal overseas, refer to the followings

- "Mobile Phone User's Guide [International Services]"
- DOCOMO International Services website

Information

- For country codes/international call access codes/universal number international prefix, supported countries/areas and network operators, refer to "Mobile Phone User's Guide [International Services]" or the DOCOMO International Services website.

Available services

(○: Available ×: Unavailable)

Main Communication services	3G	3G 850	GSM (GPRS)	LTE
Call	○	○	○	×
SMS	○	○	○	×
Email*	○	○	○	×
Browser*	○	○	○	×

* To use data communication when roaming, turn ON the data roaming settings (P.427).

Information

- Some services are not available depending on the overseas network operator or network.

Before using the terminal

Checking before leaving Japan

Check the following for using terminal overseas before leaving Japan.

■ Subscription

- Confirm your application status of WORLD WING. For details, contact "docomo Information Center" on the last page of this manual.

■ Usage fee

- Overseas usage charge (call and packet communication) differs from those in Japan.
- As some applications automatically perform packet communications, the packet communication charge may become expensive. For each application, confirm with your application provider by yourselves.

Preset

■ Network service

If you subscribed to network services, Voice mail service, Call forwarding service and Caller ID request service are available from overseas. However, some network services may not be used.

- To use network services overseas, you need to activate "Remote operation settings" (P.175). Alternatively, you can set "Remote operation (charged)" (P.177) overseas.
- Depending on overseas network operators to connect, network services may not be used even if it can be activate/deactivate.

Checking in the country you stay

When you arrive overseas and turn on the terminal, an available network is automatically connected.

■ Connection

The optimum network will be selected automatically if "Select automatically" is selected for "Available networks" in "Network operators". When you connect to the network operator conducted in flat-rate service, you can use the service with flat-rate packet communication charges overseas up to the specified upper limit per day. Also, you need to subscribe packet flat-rate service in Japan to use it. For details, see "Mobile Phone User's Guide [International Services]" or DOCOMO International Services website.

■ Display

A network type in use is displayed on the status bar.

Icon	Network type
 / 	International roaming in use (Radio signal reception Weak/Strong)
 / 	GPRS network Usable/communicating
 / 	3G network Usable/communicating
 / 	HSDPA network Usable/communicating

- Connected network operators are viewable on the notification panel.

■ Setting clock

When you mark "Automatic date and time" on "Date and time", the clock time or time difference of the terminal is corrected by receiving information about time or time difference from the network overseas operator.

- Depend on the network provided by overseas network operator, time/time difference correction may not be performed correctly. Set the time zone manually if it is not performed correctly.
- Correction timing varies by overseas network operator in connection.
- "Date and time" (P.303)

■ About inquiries

- If the terminal or the docomo mini UIM card is misplaced or stolen overseas, immediately contact DOCOMO from the spot and request for suspension of usage. Please see the last page of this manual for contact information. Be careful that you are charged also for calls and/or communications, if any, occurring after misplacement or stealage.
- For contact from a land-line phone etc., add "International call access code" or "Universal number international prefix" assigned to the countries.

Making/Receiving calls in the country you stay

Making a call to outside country you stay (including Japan)

You can make a call from the country you stay to other country using the international roaming service.

- For information of available countries or network operators, see DOCOMO International Services website.

1 From the Home screen, "Phone" → "Dial"

2 + (Touch and hold "0") → Country code → Area code (city code) → Enter a phone number of the other party

- Please omit the prefix "0" in the area code (city code). However, "0" may be required to dial to some countries or areas such as Italy.

3  → "Call by WORLD CALL"/"Call without int'l prefix"

- For setting International dial assist, tap  → "Call settings" → "Roaming settings" → "International dial assist" to check (P.176) .

4 When the call ends, "End call"

Making a call within the country you stay

You can make a call to a land-line phone or mobile phone in the same way as in Japan.

- 1** From the Home screen, "Phone" → "Dial"
- 2** Enter a phone number of the other party
- 3** Tap 
- 4** When the call ends, "End call"

Making a call to WORLD WING user overseas

If you call to the other party who is overseas "WORLD WING" user, even when he/she is in the country you stay, please make an international call to Japan.

- Regardless of countries, the call is to be communication via Japan. Call in the same way as an international call to Japan, with adding prefix "+" and "81" (Country code of Japan), and then entering a phone number omitted leading "0".

Receiving a call in the country you stay

You can receive a call in the same way as in Japan.

Information

- When you received a call during the international roaming, regardless of which country the call is from, it is forwarded internationally from Japan. A caller is charged for a call fee to Japan, and the receiver is charged for a reception fee.
- Even if the other party calls with the caller ID notified, depending on the overseas network operator, the caller ID may not be notified. Or depending on the network the other party uses, the caller ID may be notified in the different number from the other part's caller ID.
- For overseas use, "Call rejection" may not work (P.183).

Making a call from the other party

- **To have the other party in Japan call you overseas**

Have the other party dial a phone number in the same way as in Japan.

- **To have the other party make a call from the outside Japan to the country you stay**

Regardless of countries, you will receive a call via Japan. The other party should dial with prefix an international access code and "81" (Country code of Japan).

International access code of the country the dialer stays - 81 - 90 (or 80) - XXXX-XXXX

Setting for overseas network connection

When you use the terminal overseas, switching to network available in the country you stay is required. By default, the terminal is set to automatically search and switch to an available network. You can also change the settings manually.

Setting network mode

- 1** From the Home screen,  → "Settings" → "More settings" → "Mobile networks" → "Network mode"
- 2** Tap the network mode to be used
 - GSM/3G/LTE (auto mode): Select from LTE network, 3G network or GSM/GPRS network automatically.
 - GSM only: Use only GSM/GPRS networks.

Information

- LTE network is not available overseas.

Checking an available network operator and setting it manually

- 1 From the Home screen,  → "Settings" → "More settings" → "Mobile networks" → "Network operators"

A list of searched network operator's name appears.

- When an information screen appears, tap "OK".
- To search again, tap "Search networks".
- Displayed network operators vary depending on "Network mode" (P.425) settings.

- 2 Tap a network operator name to connect

Information

- If you set a connecting network operator manually, the terminal cannot be connected automatically to the other network operator when you move out of the service area. However, when you move to the FOMA network area, the terminal automatically connects to the FOMA network even if the connecting network operator is set manually.
- If you set a connecting network operator manually, it is recommended to set "Select automatically" when you return to Japan.

Selecting an available network operator automatically

- 1** From the Home screen,  → "Settings" → "More settings" → "Mobile networks" → "Network operators"
 - When an information screen appears, tap "OK".
- 2** "Select automatically"
 - When an information screen appears, tap "OK".

Setting data roaming

- 1** From the Home screen,  → "Settings" → "More settings" → "Mobile networks"
- 2** Mark "Data roaming"
- 3** "OK"

After returning to Japan

When you return to Japan, the terminal automatically searches a network and is connected to docomo's network. If you do not connect it, set the followings.

- Set "Network mode" of "Mobile networks" to "GSM/3G/LTE (auto mode)" (P.425).
- Set "Network operators" of "Mobile networks" to "Select automatically" (P.427).

Appendix/Index

Introduction of options and related devices

Combining the terminal with optional accessories supports a wide variety of uses from personal use to business use. Some products are unavailable depending on the area. For details, contact a sales outlet such as a docomo Shop.

For details about the optional devices, refer to the instruction manual for each device.

- Battery Pack SC07
- Back Cover SC07
- AC adaptor SC04
- HDMI cable SC03
- USB cable SC02
- FOMA Charging Adapter for microUSB SC01
- FOMA AC Adapter 01 for Global use^{*1*2}
- FOMA AC Adapter 02^{*1*2}
- FOMA DC Adapter 01/02^{*1}
- In-Car Hands-Free Kit 01^{*3}
- FOMA Dry Battery Adapter 01^{*1}
- Wireless Earphone Set 03^{*3}
- Bone conduction microphone/receiver 02^{*3}
- FOMA Portable Charging Adapter 02^{*1}
- Carry Case L 01
- Carry Case 02
- Pocket charger 01/02
- AC adaptor 03
- AC Adapter Converter Plug TypeC 01

- Micro USB Cable 01
- DC adapter 03
- *1 FOMA Charging Adapter for microUSB SC01 is required to connect to the terminal.
- *2 When using the adapter overseas, a conversion plug adapter applicable to the country you are staying is required.
- *3 You can connect to the terminal via Bluetooth communication.

Information

- To connect the terminal with an external device, always connect HDMI cable SC03 to an HDMI cable (commercial item) to use.

Sample accessories

- Sample accessories are not covered by the warranty for free cost of repair.
- Specification or appearance of samples is subject to change without prior notice for performance upgrade.

microSD card (2GB)

■ Notes on use

- Check attaching/removing steps (P.59). Attaching/Removing forcibly may cause malfunction.
- For using the product, be sure to back up the data. Note that DOCOMO assumes no responsibility for any damage or loss of saved data regardless of sort/cause.
- The product has duration of life. By using for long-time period or repeatedly, writing/reading data may be unavailable or the speed may become slow.
- Do not attach the product to the equipment with label or sticker attached to the product or SD card adapter. It may cause fault of attaching/removing to the equipment or bad connection.
- To discard the product, obey the regulations of local government.

■ Disclaimer

Note that DOCOMO shall have no liabilities for the followings:

- Loss, lost earnings by using the product or disability of use, or loss caused by lack of

observing the descriptions in the manual on request from the third party/handling the product

- Loss or damage of data occurred by using the product
 - DOCOMO does not restore/recover data.
- Loss occurred by malfunction caused by combination with connecting device or software

■ Main specifications


Voltage	2.7V - 3.6V
Dimension	Approx. 15 mm (H) x 11 mm (W) x 1 mm (T)
Weight	Approx. 0.29g

Stereo Headset with Microphone

■ How to use

1 Insert the connecting plug of Stereo Headset with Microphone to the headphone connection jack of the terminal.

- While displaying the Home screen etc., press the switch to play music. While incoming call, press to receive a call. Adjust the volume level with Volume Key.
- When you end using, remove it in reverse steps of inserting.
- Firmly insert the connecting plug to the end. If the connecting plug stays on the way, sound may not be heard.
- Take care so that cord of Stereo Headset with Microphone does not get entangled with you, surrounding people or objects.

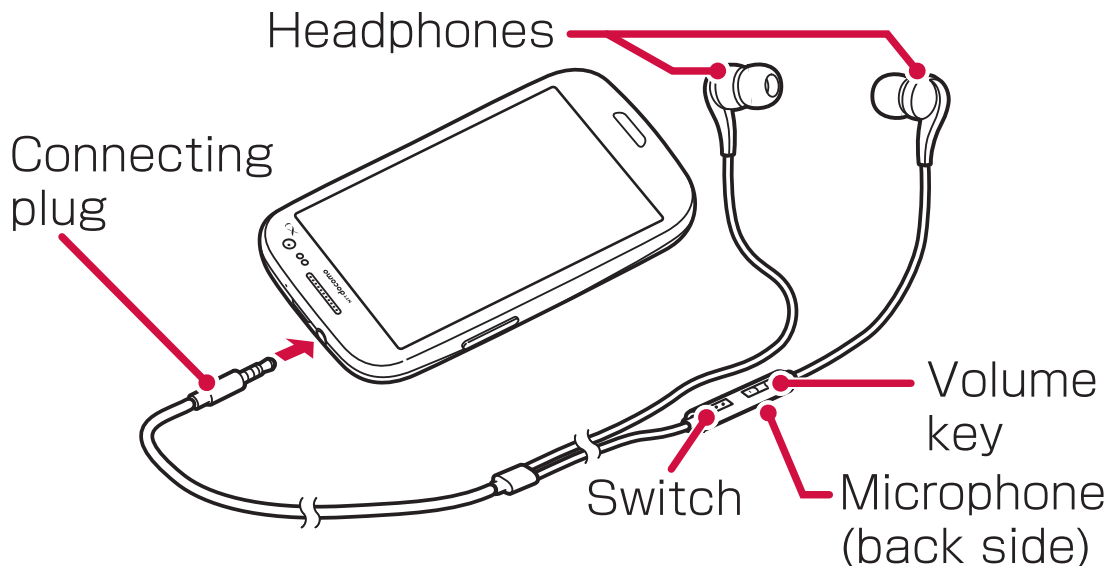

■ When the size of earpieces does not fit

Earpieces in 3 different sizes are supplied with Stereo Headset with Microphone. Change the earpieces if it does not fit in size.

■ Main specifications

Connector shape	3.5 mm stereo mini plug
Impedance	32 Ω
Maximum input	40 mW (1.13V)
Maximum output	95dB
Size	Length: Approx. 1244.2 mm
Weight	Approx. 11.9 g (only main unit)

Troubleshooting

Troubleshooting

- First, check if software update is needed and if it is necessary, update the software (P.456).
- When problems do not improve after checking the following items, contact the phone number given in "Repairs" on the last page (in Japanese only) or DOCOMO-specified repair office.

■ Power

Trouble	Check and remedy
Cannot turn on the terminal (cannot use the terminal).	• Is the battery pack installed correctly? → P.63 • Is the battery exhausted? → P.66

■ Charging


Trouble	Check and remedy
Cannot charge the terminal.	• Is the battery pack installed correctly? → P.63 • Is the adapter or cigarette lighter connector correctly inserted to an outlet or cigarette lighter socket? • Are the adapter and the terminal set correctly?

Trouble	Check and remedy
Cannot charge the terminal.	• Are the accessory USB Cable SC02 and the terminal set correctly? • When using USB Cable SC02, does the power of the PC turn on? • If you execute calls, communications or other operation for a long time while charging, the terminal may become hot and charging may be unavailable. In this case, wait until the temperature of the terminal down and retry charging.

■ Operating terminal

Trouble	Check and remedy
Become hot while operating/charging.	• While operating or charging, or when you call for a long time, the terminal, battery pack or adapter may become hot. There is no safety problems and you can continue to use it.

Trouble	Check and remedy
The operation time is short.	• Is the terminal left for a long time out of service area? Staying outside of the service area may consume much power to search available radio waves for communication. • The operating time of the battery pack varies depending on the operating environment and the secular degradation of the battery pack. • The battery pack is a consumable accessory. The usage duration of the battery per one charge decreases gradually each time the battery is recharged. When the operation time is too short even the terminal is fully charged, purchase a new battery pack of the specified type.
Power is automatically turned off or the terminal is automatically restarted.	• If the terminal of battery pack is dirty, the contact may become poor and the power may shut OFF. When it is dirty, clean the battery pack with a dry cotton swab etc.

Trouble	Check and remedy
No operation is performed even tap the touch screen.	Is the screen locked? Unlock the screen by pressing  / . → P.75
The touch screen reacts slowly when a screen is tapped.	- It may be occurred when large amount of data is saved in the terminal or transferring large-size data between the terminal and microSD card. - Do you attach a protection sheet on the terminal? The operations may be impeded by the protection sheet. - If the surface of the display is scratched or damaged, contact "Repairs" on the last page of this manual (in Japanese only) or DOCOMO-specified repair office.
The docomo mini UIM card is not recognized.	Is the docomo mini UIM card installed with a correct direction? → P.57
Time is incorrect.	It may be occurred if the terminal keeps turned on for a long time. Check if "Automatic date and time" is set to ON, and turn on the terminal at places where signal is strong.

Trouble	Check and remedy
Terminal become unstable	• It may caused by applications installed to the terminal after purchase. If problems improve when you start in Safe Mode, problems may be improved by uninstalling the application. * Safe Mode is a function to activate the phone in a mode similar to default. • To start Safe Mode Press  when power is OFF, while the Samsung logo screen is displayed, Tap  continuously every second. * When start Safe Mode, "Safe Mode" appears on the lower left corner of Home screen. * Turn power OFF and restart to terminate Safe Mode. • For use Safe Mode, back-up the required data beforehand. • Note that widget you created may be removed. • When using phone, terminate Safe Mode because Safe Mode is not usually.

Trouble	Check and remedy
Terminal reacts slowly/ Behaviours become unstable/ Some of the program cannot activate.	Confirm the internal memory usage of the terminal and obtain memory by ending some activated programs. → P.100
Data is not displayed properly/ Cannot operate the touch screen properly.	Try "Factory data reset". → P.301
Cannot unlock the screen.	Is the screen lock set? → P.293
The terminal does not react and cannot operate the terminal.	Press and hold  for 1 second or more and tap "Restart" on the Device options screen or press  for 8 to 10 seconds to restart the terminal. Try "Factory data reset" (P.301) if the problem does not improve after restart.

Trouble	Check and remedy
Application does not work properly (cannot activate, errors occur frequently, etc.)	Are there any applications being disabled? Enable the disabled applications and try again. → P.274

■ Calling

Trouble	Check and remedy
Cannot make a call even though tapping Call key.	- Is the docomo mini UIM card installed to the terminal correctly? → P.57 - Is the terminal set to Airplane mode? → P.247
The ringtone does not sound.	- Is the terminal set to mute? → P.262 - Is "Device ringtone" set to "Silent"? → P.264 - Is "Ringtone" of "Volume" set to 0? → P.263 - Is "Auto reject mode" set to "All numbers" or "Auto reject numbers"? → P.177 - Is the terminal set to Airplane mode? → P.247 - Is the ring time of Voice mail service or Call forwarding to "0 sec."? → P.174

Trouble	Check and remedy
Cannot connect calls. ("out of area" does not disappear even if you change the location, or cannot make/receive a call even if radio wave is strong.)	• Turn the power off and on, or remove and attach the battery pack or docomo mini UIM card. → P.57, P.63, P.73 • Due to the radio wave types, making/receiving calls may be unavailable even in the service area and even when strong radio wave is indicated in 4 signal mark (▬▬▬▬). Move to the other place and call again. • Is call rejection set? → P.177 • Due to the crossing of radio waves, at the crowded public places, calls/mails are crossed and the connection status may not be good. In that case, "Please wait for a while" appears and calling sound is played. Move to other place or call again at other time.
Cannot connect to network.	• Do you use at a place where signal is weak? → P.73

■ Display

Trouble	Check and remedy
The display is dimmed.	• Is the elapsed time before display turned off set? → P.266 • Do you adjust the brightness of the display? → P.268 • Is Power saving mode set? → P.272 • Is "Auto adjust screen tone" under "Display" marked? If marked, screen tone will be adjusted according to the selected image. → P.267 • Is the battery level low? → P.274

■ Volume

Trouble	Check and remedy
During a voice call, the other party's voice is hardly to be heard to or too loud.	• Do you change the listening volume? → P.166

■ Camera

Trouble	Check and remedy
Still images and videos shot with the camera are blurred.	• Check if clouds or dirt attach to the lens of camera. • Set face detection to ON when you take a portrait. • Capture still images with Anti Shake set to ON.
Error messages appear when trying to start the camera.	• Confirm the battery usage. → P.274 • Confirm the memory usage. • Restart the terminal.

■ 1Seg

Trouble	Check and remedy
Cannot watch 1Seg.	• Are you in an area where outside the digital terrestrial broadcasting area or where an airwave is weak? • Do you set channel settings?

■ International roaming

Trouble	Check and remedy
Cannot use the terminal overseas	■ If the signal meter is displayed • Do you subscribe to WORLD WING? Check the subscription of WORLD WING. ■ If "out of area" is displayed • Are you out of the service area of the international roaming service or in weak radio wave area? Check if it is available service area or overseas network operator with "Mobile Phone User's Guide [International Services]" or the DOCOMO International Services website. • Try to change the network settings or settings for overseas communication operator. Set "Network mode" to "GSM/3G/LTE (auto mode)". → (P.425) Set "Network operators" to "Select automatically". → (P.427) • It may recover by turning OFF the terminal and turning it ON again.

Trouble	Check and remedy
Cannot use data communication overseas	Set data roaming to ON. (→P.427)
The terminal cannot be used suddenly while you use it overseas.	Is the limit of maximum charges for use exceeded? A limit of maximum charges for use is set beforehand if you use "International Roaming Service (WORLD WING)". If the limit of maximum charges for use is exceeded, check out your accumulated fee.
No caller ID is notified/A notified caller ID is different from that of the caller/ Functions for using contents saved in Contacts or those using Caller ID notification do not operate.	Even when a caller notifies the caller ID, it is not displayed on the terminal unless notified from the network or network operator used. And, a notified caller ID may be different from that of the caller by some networks or networks operators you use.

■ Data Management

Trouble	Check and remedy
Data transfer is not performed.	• Do you use USB HUB? When USB HUB is used, the terminal may not be operated correctly.
Data saved in microSD card is not displayed.	• Remove and attach microSD card. → P.60
Image is not displayed.	• If it is not supported image data,  appears in "My Files".
No operation is performed even by connecting the terminal to a PC.	• For Windows XP, upgrade to Windows XP Service Pack 3 or later. • Install Samsung Kies 2.0 or later or Windows Media Player 10 or later to a PC.

■ Bluetooth

Trouble	Check and remedy
Cannot connect to Bluetooth device/ Bluetooth device cannot be found by scanning	• The Bluetooth device (commercial item) is needed to be in registration stand-by state. If you register the device again after deleting the registration, delete the registrations on both Bluetooth communication device and the terminal, and then perform registration of the devices.
Cannot call from the terminal with external device connected such as car navigation or hands-free device.	• If the person you call does not answer the phone or if you call several times when out of service, you may not call the number again. Turn off and turn on the terminal again.

If error message appears mentioned below

Error message	Cause and remedy	Page
The application XXXX (process XXXX) has stopped unexpectedly. ／ XXXX (XXXX) has stopped*	Appears when an error is occurred in the terminal or function. Tap "Force close"/"OK" and then retry.	—
Airplane mode on. Turn Airplane mode off to make calls	Appears when you try to make a call with the docomo mini UIM card attached incorrectly or with the Airplane mode is set. Check if the docomo mini UIM card is correctly attached or not or set the Airplane mode is off, and retry.	P.57 P.247

* XXXX indicates application or function name in which an error is occurred.

Smartphone Anshin Remote Support

By sharing screens of your terminal with NTT docomo, you can receive technical support to make settings.

- This service is not available if your docomo mini UIM card is not inserted, during international roaming, or in Airplane mode.
- Smartphone Anshin Remote Support is a service requiring subscription.
- Some operations and settings are not supported.
- For details of Smartphone Anshin Remote Support, refer to NTT DOCOMO's website.

1 Call スマートフォン遠隔サポートセンター (Remote support center for smartphone)



0120-783-360

Business hours 9:00 a.m. to 8:00 p.m.
(open all year round)

2 From the Home screen, → "遠隔サポート (Remote support)"

- For the first using, agree to "ソフトウェア使用許諾書 (License Agreement)".

3 Enter connection number notified by DOCOMO

4 Remote support starts when you are connected

Warranty and After-Sales Service

Warranty

- This terminal is provided with a written warranty. Make sure that you receive it. Check the written contents and items such as "販売店名・お買い上げ日 (Shop name/date of purchase)" and keep it in a safe place. If it does not contain the necessary information, immediately contact the shop where you bought it. The warranty is valid for a period of one year from the date of purchase.
- This product and all accessories are subject to change, in part or whole, for the sake of improvement without prior notice.
- Since troubles, repair or other handling of the terminal may cause contents in the Contacts etc. to be modified or deleted. DOCOMO recommends making a copy of the Contacts data etc., in case.
- * With the terminal, data such as phonebook entries can be saved to microSD card.
- * Data such as phonebook entries can be backed up to Oazukari Center using ケータイデータお預かりサービス (Data Security service) (subscription is required).

After-Sales Service

When problems occur

Before requesting repair, read the section on "Troubleshooting" in this manual. If the problem still persists, contact "Repairs" on the last page of this manual (in Japanese only).

If the result of inquiries indicates that a repair is required

Take your terminal to DOCOMO-specified repair office. Be sure to check the business hours of the repair office before you go. Also, you must bring the warranty. Note that, repair may take longer time depending on the state of damage.

■ In the warranty period

- The terminal is repaired at no charge subject to the conditions of the warranty.
- The warranty must be presented to receive warranty service. The subscriber is charged for the repair without presenting the warranty or repairs of defects resulting from misuse (damage of the display/connector etc.), accident, neglect, etc. even during the warranty period.
- The subscriber is charged even during the warranty period for the repair of failures caused by the use of devices or consumable items that are not DOCOMO-specified.

■ Repairs may not be possible in the following cases.

- When corrosion due to moisture, condensation, perspiration, etc. is detected, or if any of the internal boards are damaged or deformed (repairs may not be possible if external connection jack/headphone connection jack or the display is damaged, or the terminal outer case is lifted)
- * Even in case that a repair is possible, since those conditions are outside the range of the warranty, a repair is charged.

■ After expiration of the warranty

All repairs that are requested are charged.

■ Replacement parts

Replacement parts (parts required to maintain the product functions) are basically kept in stock for at least 4 years after termination of production. However, repair may not be possible due to lack of repair parts etc. Depending on the nature of the required repair, it may still be possible to repair your phone even after this period. Call the contacts listed on the last page of this manual, "Repairs" (In Japanese only).

Notes

- Do not modify terminal or its accessories.
 - Doing so may cause fire, injury or damage.
 - Modified terminals etc. are repaired only after the customer accepts that the modified parts are to be restored to the condition at the time of purchase. However, repair may be refused depending on the nature of modification.

The following cases may be regarded as modifications.

 - A sticker etc. is put on the display part or keypad part
 - The terminal is embellished with adhesive material etc.
 - Exteriors are replaced with other than DOCOMO'S genuine parts
 - Repair of failures or damage caused by modification is charged even during the warranty period.
- Do not remove any inscription stickers attached to terminal. The inscription stickers certify that the terminal satisfies specific technical standards. Note that, if stickers are removed intentionally or reattached in such a way that confirmation of the sticker's contents is impossible, repair or servicing may be refused because confirmation of whether the phone conforms to relevant technical standards cannot be made.
- Data such as settings for each function may be cleared (reset) by malfunctions, repair or other handling of terminal. Should that happen, set up the functions again.

- When the repair is executed, MAC address of Wi-Fi/Bluetooth address in the terminal may be changed regardless of repaired part.
- Magnetic components are used in the parts that are described below. Do not allow cash cards or other devices that are vulnerable to magnetism to come into contact with the phone.

Used parts: speaker, earpiece, camera, vibrator section (around the Back key), around the headphone connection jack

- If the terminal gets wet or moist, immediately turn the power off, remove the battery pack, and bring the terminal to a repair office as soon as possible. However, repair may not be possible depending on the condition of terminal.

Precautions on Memory Dial (Contacts function) and downloaded data

Note that data you created, retrieved or downloaded from sources other than your terminal may be changed or lost when you change the model or have repairs done to the terminal. DOCOMO shall have no liability for any change or loss of any kind. Under some circumstances, DOCOMO may replace your terminal with its equivalent instead of repairing it. When replacing your phone, most of the above-mentioned data cannot be transferred to the new phone.

Updating software

Software update

Download revision file for the terminal from the download site on the Internet and update the software. For software update, there are two methods; connecting to the network directly on the terminal and using "Samsung Kies" (P.318) installed to a PC.

Precautions on software update

Software update can be done with the data saved to the terminal remained. However, note that depending on your terminal condition (malfunction, damage, water-soaked), the data may not be protected. You are recommended to backup the user information and data in the terminal just in case. However, some data may not be backed up.

- Prepare the followings before software update.
 - Exit all programs running on the terminal (P.100)
 - Charge the terminal (P.70) to make the battery level enough.
- Do not remove the battery pack during software update. Doing so may cause failure of the update and the operations may not be available.
- It may take time to update software (download and installation of update files).

- During installing the update files for software update, all functions including making/receiving phone call are not available.
- When you cannot perform any operations because of the failure of the software update, please take your terminal to DOCOMO-specified repair office.

Updating software only with the terminal

You can update the software of the terminal by connecting network with the terminal.

1 Set Google account

2 From the Home screen, → "Settings" → "About device" → "Software update" → "Update"

If you permit downloading a file only when connecting via Wi-Fi, mark "Wi-Fi only".

3 Set according to the onscreen instructions

After the software update is completed, the terminal restarts and update starts. During update, some functions such as making calls cannot be used.

Information

- To suspend installation temporarily after downloading software, tap "Later" on the confirmation screen for continuing installation.
When you suspend installation, the installation can be started immediately by tapping "Update".

Main specifications

■ Phone

Product name		SC-06D
Size		Approx. 137 mm (H) x 71 mm (W) x 9.0 mm (T) (Maximum thickness: Approx. 9.4 mm)
Weight		Approx. 139 g (with battery)
Memory		ROM 32GB RAM 2GB
Continuous stand-by time	FOMA/3G	Stationary (Auto): Approx. 400 H
	LTE	Stationary (Auto): Approx. 270 H
	GSM	Stationary (Auto): Approx. 330 H
Continuous call time	FOMA/3G	Approx. 500 min.
	GSM	Approx. 600 min.
Charging time	AC Adapter SC04	Approx. 190 min.
	DC adapter 03	Approx. 200 min.

Display section	Type	AMOLED
	Size	Approx. 4.8 inches
	Number of colors	16,777,216 colors
	Number of dots	720 (W) dots x 1,280 (H) dots
Image pickup device	Type	External: CMOS Internal: CMOS
	Size	External: 1/3.2 inches Internal: 1/6.0 inches
Number of effective pixels		External: Approx. 8.1 mil. pixels Internal: Approx. 1.9 mil. pixels
Number of recording pixels (Max.)		External: Approx. 8.1 mil. pixels Internal: Approx. 1.9 mil. pixels
Digital zoom		Up to Approx. 4.0 X (30 levels)
Playing music	Windows Media Audio (WMA) file	Continuous play time Approx. 1,600 min. (For background play)
	MP3 file	Continuous play time Approx. 2,200 min. (For background play)

Continuous 1 Seg watching time		Approx. 310 min.
Wireless LAN		IEEE802.11a/ b/g/n compliant (IEEE802.11n: 2.4GHz/5GHz)
Bluetooth function	Version ^{*1}	Bluetooth standard Ver.4.0+LE
	Output	Bluetooth standard Power Class 1
	Vistaed communication distance ^{*2}	Within approx. 10 m
	Compatible profile ^{*3}	Object Push Profile (OPP) Headset Profile (HSP) Hands-Free Profile (HFP) Advanced Audio Distribution Profile (A2DP) Audio/Video Remote Control Profile (AVRCP) Serial Port Profile (SPP) Phone Book Access Profile (PBAP) Human Interface Device Profile (HID)

- *1 It is confirmed that the terminal and all Bluetooth devices are compliant with Bluetooth standards designated by Bluetooth SIG, and they are authenticated. However, procedures may differ or data transfer may not be possible depending on the device's characteristics or specifications.
- *2 May vary by the signal status and/or whether there is interference between communications devices.
- *3 Standardized connection steps of Bluetooth communication by product property.

- Continuous call time is an estimate of the operation time for calling when radio signal reception is normal.
- Continuous stand-by time is an estimate of the stand-by time when radio signal reception is normal.

The stand-by time may be decreased as low as half the time depending on the conditions of battery charge, function settings, temperature, or radio signal reception in the area (no reception or weak), etc.

- A use of the Internet connection reduces the call (communication)/stand-by time. Composing emails or starting applications also reduces call (communication)/stand-by time even if you do not call or use the Internet.
- Stationary continuous stand-by time is the estimated average operation time when radio signal reception is normal in the stationary state.
- Charging time is an estimate for charging an empty battery pack with the terminal power

off. For charging with the terminal power on, it takes longer.

Battery Pack

Product name	Battery pack SC07
Battery used	Li-ion battery
Nominal voltage	3.8V
Nominal capacity	2100mAh

File format

Still images and videos taken with the terminal will be saved in following file formats.

Type	File format	Extension
Still image	JPEG	jpg
Video	MP4	mp4

Shooting number of still images (estimate)

Shooting size	SC-06D (Phone)*	microSD card (1GB)
640 x 480	Up to approx. 260,000 images	Up to approx. 8,500 images

Estimated value in Image quality: Normal are set.

* Default savable number.

Shooting time of videos (estimate)

Shooting size	SC-06D (Phone)*	microSD card (1GB)
640 x 480	Up to approx. 1,100 min. (up to approx. 60 min. per 1 video)	Up to approx. 43 min. (up to approx. 43 min. per 1 video)

Estimated value in both video quality: normal is set.

* Default recordable time.

Specific Absorption Rate (SAR) of Mobile Phones

This model [SC-06D] mobile phone complies with Japanese technical regulations and international guidelines regarding exposure to radio waves.

This mobile phone was designed in observance of Japanese technical regulations regarding exposure to radio waves (*1) and limits to exposure to radio waves recommended by a set of equivalent international guidelines. This set of international guidelines was set out by the International Commission on Non-Ionizing Radiation Protection (ICNIRP), which is in collaboration with the World Health Organization (WHO), and the permissible limits include a substantial safety margin designed to assure the safety of all persons, regardless of age and health condition.

The technical regulations and international guidelines set out limits for radio waves as the Specific Absorption Rate, or SAR, which is the value of absorbed energy in any 10 grams of tissue over a 6-minute period. The SAR limit for mobile phones is 2.0 W/kg. The highest SAR value for this mobile phone when tested for use at the ear is 0.618 W/kg. There may be slight differences between the SAR levels for each product, but they all satisfy the limit.

The actual SAR of this mobile phone while operating can be well below that indicated above. This is due to automatic changes to the power level of the device to ensure it only uses the minimum required to reach the network. Therefore in general, the closer you are to a base station, the lower the power output of the device.

This mobile phone can be used in positions other than against your ear. This mobile phone satisfies the international guidelines when used with a carrying case or a wearable accessory approved by NTT DOCOMO, INC.(*2) In case you are not using the approved accessory, please use a product that does not contain any metals, and one that positions the mobile phone at least 1.5 cm away from your body.

The World Health Organization has stated that "a large number of studies have been performed over the last two decades to assess whether mobile phones pose a potential health risk. To date, no adverse health effects have been established as being caused by mobile phone use."

Please refer to the WHO website if you would like more detailed information.

http://www.who.int/docstore/peh-emf/publications/facts_press/fact_english.htm

Please refer to the websites listed below if you would like more detailed information regarding SAR.

Ministry of Internal Affairs and Communications Website:

<http://www.tele.soumu.go.jp/e/sys/ele/index.htm>

Association of Radio Industries and Businesses Website:

<http://www.arib-emf.org/index02.html>
(in Japanese only)

NTT DOCOMO, INC. Website: <http://www.nttdocomo.co.jp/english/product/sar/>

SAMSUNG Website:

<http://www.samsung.com/sar/sarMain.do>
(In Japanese)

-
- *1 Technical regulations are defined by the Ministerial Ordinance Related to Radio Law (Article 14-2 of Radio Equipment Regulations).
 - *2 Regarding the method of measuring SAR when using mobile phones in positions other than against the ear, international standards (IEC62209-2) were set in March of 2010. In regards to national technical standards, in October of 2011, a portion of advisory 118 was reported on based upon the Information and Communications Council's information and communications technology session meeting.

FCC notice

- This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
- Changes or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment.

■ Information to User

This equipment has been tested and found to comply with the limits of a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation; if this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. Reorient/relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
4. Consult the dealer or an experienced radio/TV technician for help.

FCC RF exposure information

Your handset is a radio transmitter and receiver. It is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission of the U.S. Government.

The guidelines are based on standards that were developed by independent scientific organisations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons, regardless of age and health. The exposure standard for wireless handsets employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit set by the FCC is 1.6 W/kg.

The tests are performed in positions and locations (e.g., at the ear and worn on the body) as required by the FCC for each model. The highest SAR value for this model handset when tested for use at the ear is 0.30 W/kg and when worn on the body, as described in this user guide, is 0.78 W/kg.

Body-worn operation

This device was tested for typical body-worn operations with the back of the handset kept 1.0 cm from the body. To maintain compliance with FCC RF exposure requirements, use accessories that maintain a 1.0 cm separation distance between the user's body and the back of the handset. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided. The FCC has granted an Equipment Authorization for this model handset with all reported SAR levels evaluated as in compliance with the FCC RF emission guidelines. SAR information on this model handset is on file with the FCC and can be found under the Display Grant section of <http://transition.fcc.gov/oet/ea/fccid/> after searching on FCC ID A3LSWDSC06D. Additional information on Specific Absorption Rates (SAR) can be found on the Cellular Telecommunications & Internet Association (CTIA) Website at <http://www.ctia.org/>.

European RF Exposure Information

Your mobile device is a radio transmitter and receiver. It is designed not to exceed the limits for exposure to radio waves recommended by international guidelines. These guidelines were developed by the independent scientific organization ICNIRP and include safety margins designed to assure the protection of all persons, regardless of age and health.

The guidelines use a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit for mobile devices is 2 W/kg and the highest SAR value for this device when tested at the ear was 0.476 W/kg*. As mobile devices offer a range of functions, they can be used in other positions, such as on the body as described in this user guide. In this case, the highest tested SAR value is 0.386 W/kg.

As SAR is measured utilizing the devices highest transmitting power the actual SAR of this device while operating is typically below that indicated above. This is due to automatic changes to the power level of the device to ensure it only uses the minimum level required to reach the network.

Declaration of Conformity

We, **Samsung Electronics**
declare under our sole responsibility that the
product

GSM WCDMA BT/Wi-Fi Mobile Phone: SC-06D
to which this declaration relates, is in conformity
with the following standards and/or other
normative documents.

SAFETY	EN 60950-1 : 2006 +A1 : 2010
	EN 50360 : 2001 / AC 2006
	EN 62209-1 : 2006
SAR	EN 62209-2 : 2010
	EN 62479 : 2010
	EN 62311 : 2008
	EN 301 489-01 V1.8.1 (04-2008)
EMC	EN 301 489-07 V1.3.1 (11-2005)
	EN 301 489-17 V2.1.1 (05-2009)
	EN 301 489-24 V1.5.1 (10-2010)
	EN 301 511 V9.0.2 (03-2003)
	EN 301 908-1 V5.2.1 (05-2011)
	EN 301 908-2 V5.2.1 (07-2011)
RADIO	EN 300 440-1 V1.6.1 (08-2010)
	EN 300 440-2 V1.4.1 (08-2010)
	EN 300 328 V1.7.1 (10-2006)
	EN 301 893 V1.5.1 (12-2008)

We hereby declare that [all essential radio test
suites have been carried out and that] the
above named product is in conformity to all the
essential requirements of Directive 1999/5/EC.

The conformity assessment procedure referred to in Article 10 and detailed in Annex[IV] of Directive 1999/5/EC has been followed with the involvement of the following Notified Body(ies):

BABT, Forsyth House, Churchfield Road,
Walton-on-Thames, Surrey, KT12 2TD, UK*

Identification mark: 0168

The technical documentation kept at :


Samsung Electronics
QA Lab.

CE0168!

which will be made available upon request.
(Representative in the EU)

Samsung Electronics Euro QA Lab.
Blackbushe Business Park, Saxony Way,
Yateley, Hampshire, GU46 6GG, UK*

2012.05.25
(place and date of issue)

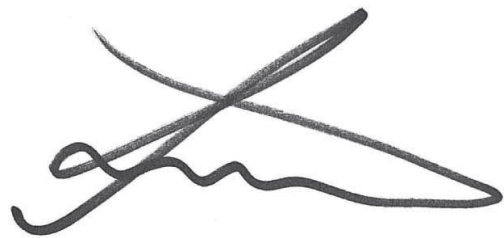

Joong-Hoon Choi/Lab Manager

(name and signature of authorised person)

* It is not the address of Samsung Service Centre. For the address or the phone number of Samsung Service Centre, see the warranty card or contact the retailer where you purchased your product.

Export Administration Regulations

This product and its accessories may be under coverage of the Export Administration Regulations of Japan ("Foreign Exchange and Foreign Trade Control Laws" and the related laws and regulations). And, they are also under coverage of Export Administration Regulations of the U.S. When exporting and reexporting this product and its accessories, take necessary procedures on your responsibility and expense. For details, contact Ministry of Economy, Trade and Industry of Japan or US Department of Commerce.

Intellectual Property Right

Copyrights

The works and copyright of music, video picture, computer program, data base, etc. are protected their right by copyright law. Copying such copyrighted works can be permitted only for the purpose of personal use or use at home. If you copy (including conversion of data format), alter, hand over of duplication, distribute on network, etc. without any approval of copyright owner exceeding above mentioned purposes, you may be claimed for damages or punished as "copyright infringement" or "infringement of moral right of an author". When you make duplications etc. using this product, please observe the copyright law and use them properly. Also, for recorded items using the camera function mounted to this product, please use them properly as above.

Portrait rights

Portrait rights are claimable rights against taking photos by others, publishing or using the taken photos without any permission. In Portrait rights, there are moral right authorized to everyone and property right (publicity right) focused on economic benefit of talent etc. Therefore, taking photos of others or talent, publishing or distributing the photos without any permission are illegal act. Please use the camera function properly.

Trademarks

Company and product names mentioned in this manual are trademarks or registered trademarks of their respective holders.

- "FOMA", "i-mode", "i-α ppli", "Deco-mail", "WORLD CALL", "WORLD WING", "mopera", "mopera U", "sp-mode", "ToruCa", "ToruCa" logo and "Xi" logo are trademarks or registered trademarks of NTT DOCOMO.
- Free Dial logo mark is a registered trademark of NTT Communications Corporation.
- microSD logo, microSDHC logo and microSDXC logo are trademarks of SD-3C, LLC.



- Bluetooth and Bluetooth logo are registered trademarks of Bluetooth SIG, Inc., and uses them under license.



- Wi-Fi Certified[®] and its logo are registered trademark or trademark of Wi-Fi Alliance.



- "Catch Phone (Call waiting service)" is a registered trademark of Nippon Telegraph and Telephone Corporation.
- "Google", "Google" logo, "Android", "Android" logo, "Google Play", "Google Play" logo, "Gmail", "Google Calendar", "Google Maps", "Google Talk", "Google Latitude", "Google +", "Picasa" and "YouTube" are trademarks or registered trademarks of Google, Inc.
- Character conversion is using iWnn of OMRON SOFTWARE Co., Ltd. iWnn[©] OMRON SOFTWARE Co.,Ltd. 2008-2012 All Rights Reserved.
- Microsoft[®], Windows Media[®], and ActiveSync[®] are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries.
- This product software contains a module developed by the Independent JPEG Group.
- Java and Java-based trademarks are trademarks or registered trademarks of Sun Microsystems, Inc. in the U.S. and other countries.
-  is a registered trademark of FeliCa Networks, Inc.
- FeliCa is a contactless IC card technology developed by Sony Corporation.
- FeliCa is a registered trademark of Sony Corporation.

- DivX[®], DivX Certified[®] and associated logos are trademarks of Rovi Corporation or its subsidiaries and are used under license.



ABOUT DIVX VIDEO: DivX[®] is a digital video format created by DivX, LLC, a subsidiary of Rovi Corporation. This is an official DivX Certified[®] device that plays DivX video. Visit divx.com for more information and software tools to convert your files into DivX videos.

ABOUT DIVX VIDEO-ON-DEMAND: This DivX Certified[®] device must be registered in order to play purchased DivX Video-on-Demand (VOD) movies. To obtain your registration code, locate the DivX VOD section in your device setup menu. Go to vod.divx.com for more information on how to complete your registration.

DivX Certified[®] to play DivX[®] video up to HD 720p, including premium content.

May play DivX[®] video up to HD 1080p.

- Rovi, G-GUIDE, G-GUIDE MOBILE and G-Guide related logos are trademarks or registered trademarks of Rovi Corporation and/or its subsidiaries in Japan.



- "Facebook" is a trademark or registered trademark of Facebook, Inc.
- DLNA, DLNA CERTIFIED are trademarks of Digital Living Network Alliance.



- Other products and company names written in this manual are registered trademarks or trademarks of each company.

Others

- This product have Adobe®Flash® Player technologies of Adobe Systems Incorporated. Adobe Flash Player Copyright© 1996-2012 Adobe Systems Incorporated. All rights reserved.

Adobe, Flash are the trademarks or registered trademarks of Adobe Systems Incorporated in the United States and other countries.



- The abbreviations of operating systems (Japanese versions) below are used in this manual.
 - Windows 7 stands for Microsoft® Windows® 7 (Starter, Home Basic, Home Premium, Professional, Enterprise and Ultimate).
 - Windows Vista stands for Windows Vista® (Home Basic, Home Premium, Business, Enterprise and Ultimate).
 - Windows XP indicates the Microsoft® Windows® XP Professional operating system or Microsoft® Windows® XP Home Edition operating system.

- This product is licensed based on MPEG-4 Visual Patent Portfolio License. The use of MPEG-4 Video Codec function is allowed for personal and nonprofit use only in the cases below.
 - Recording moving pictures that conform to MPEG-4 Visual Standard (hereinafter referred to as MPEG-4 Video)
 - Playing MPEG-4 Videos recorded personally by consumers not engaged in profit activities
 - Playing MPEG-4 Video supplied from the provider licensed from MPEG-LA.

For further utilizing such as promotion, in-house use or profit-making business, please contact MPEG LA, LLC in U.S.

Canceling SIM Lock

The SIM lock for this terminal can be unlocked. Non-DOCOMO SIM can be used with this terminal, once SIM Lock is unlocked.

- Please come to docomo Shop to unlock SIM lock.
- Handling fee for unlocking SIM lock occurs.
- When using non-DOCOMO SIM, it cannot be used in LTE. In addition, the service and function may be limited. Docomo shall not be liable for performance.
- For details about unlocking SIM lock, refer to NTT DOCOMO website.

Index

A

About device	307
AC Adapter	70
Charging	70
Accessibility	304
Access point	257
Initializing	258
Setting	257
Accounts and sync	277
Additional service	180
Adjusting ringtone volume	263
Airplane mode	247
AllShare Play	321
Application manager	274
Area Mail	219
Available services overseas	416

B

Backup	301
Battery	274
Battery pack	66
Attaching the battery pack	63
Battery pack life	66
Estimate battery pack operating time ..	67
Estimate charging time	69
Removing the battery pack	65

Bluetooth	246, 311
Brightness	268

C

Calculator	403
Caller ID notification	174
Call forwarding service	174
Call settings	174
Call waiting	174
Camera	357
Setting before shooting	361
Shooting screen	359
Shooting still images.....	365
Shooting videos	366
Charging	66
Checking an available network operator	426
Checking your own phone number	308
Clock.....	389
Alarm.....	389
Desk clock	392
Stopwatch	392
Timer.....	392
World clock.....	391
Configuring initial settings	86
Connecting with USB cable	317
Copying	115
Cutting.....	115

D

Data usage	246
Date and time	303
Dictionary	409
Display	266
Display (touch screen)	76
dmarket	325
dmenu	324
Doc	302
docomo mini UIM card	56
Attaching	57
Removing	58
Security codes	56
docomo Palette UI	126
Kisekae	134
Docomo service	276
Double-tap	77
Drag	78

E

Email	205
Checking received	214
Creating and sending	212
Managing account	208
Setting up	205
Entering characters	102
Samsung Japanese keypad	104
Samsung keyboard	108

Switching the input method 103

F

Flick 78

G

Gallery 367

Google Latitude 386

Google Maps 385

Google Play 326

Google Talk 221

GPS 382

H

Home selection 277

I

Initialize 301

International call (WORLD CALL) 172

International roaming (WORLD WING) ... 415

Internet 223

K

Koe-no-Takuhaibin 174

L

Language and input	299
LED indicator	270
List of running applications	100
Location services	282
Lock screen options	295

M

Mail	198
Email	205
Gmail	217
sp-mode mail	198
Making a call	155
Call logs	167
Phonebook	192
Making calls(International roaming)	421
Media Player	370
microSD card	59
Attaching	60
Formatting	62
Removing	61
Mobile TV	335
mopera U	259
Motion	271
Music player	375
My files	309
My profile	192

N

Navigation	387
Notification panel	94
Number of running applications	100

O

Osaifu-Keitai	329

P

Pasting	115
Phonebook	185
Favorites	190
Group	190
Making a call	192
Registering	185
PIN code	291
Player	370
Playing music	375
Play Store	326
Polaris Office	412
Power saving	272
Public mode (power OFF)	175
PUK code	292

Q

Quick search box	97

R

Rejecting call	182
Set reject messages	182
Remote function	298
Reset	301

S

Samsung Apps	328
Samsung Japanese keypad	104
Switching keypad types	106
Switching text input modes	106
Wildcard Prediction	107
Samsung keyboard	108
Samsung Kies	318
Screen lock	75
Scroll	78
SD card backup	404
Security	283
Security code	288
Network security code	290
PIN code	291
Selecting an available network operator	427
Setting character entry/conversion function	117
Setting display	266
Setting for overseas network connection	425

Setting menu items	238
Setting network operator (overseas) ...	426
Setting ringtone/notification sound	264
Setting vibrator	265
SIM change alert.....	297
S memo	394
SMS	
Checking received	201
Creating and sending	199
Sound	260
Specific absorption rate (SAR)	465
Specifications	459
S Planner	393
sp-mode	258
sp-mode mail	198
Status bar	89
Main notification icon	89
Main status icon	92
Stereo Headset with Microphone	162
Still image	
Shooting	365
Viewing	368
Still images	365
Storage	273
Switching the orientation of the display ...	84

T

Tap	77
Tethering	250

ToruCa	333
Touch and hold	77
Touch screen	76
Turning power ON/OFF	73

U

Updating software	456

V

Video

Playing	368, 372
Shooting	366
Video player	372
Voice mail service	174
Voice recorder	401
Volume setting	
Media sound	263
Phone ringtone	263
VPN	248

W

Wallpaper	269
Web browser	223
Widen/Narrow	79
Wi-Fi	240
Wireless and network	239

Y

YouTube 407

Numeric

"186" (notify)/"184" (not notify) 156

Please ask checking/changing subscription detail, application of various services and request of various information materials online.

From sp-mode dmenu ⇒ "お客様サポートへ (To Customer support)" ⇒ "各種お申込・お手続き (Various application/Procedures)" [Packet communication charge free] (In Japanese only)

From a PC My docomo (<http://www.mydocomo.com/>) ⇒ 各種お申込・お手続き (Various application/Procedures) (In Japanese only)

- * For use from sp-mode, "Network security code" is required.
- * For use of sp-mode, a charge may be applied for some services.
- * For use from a PC, "docomo ID/Password" is required.
- * If you do not have or forget "network security code" or "docomo ID/Password", contact "General Inquiries" on the back cover page.
- * You may not use the services depending on your subscription.
- * There are cases where the site may not be available to system maintenance, etc.

Using mobile phone with your manners!

Always turn OFF your terminal in cases below

■ In a place where use of mobile phones is prohibited

Always turn OFF your terminal in an aircraft, hospital or near courtesy seat.

※ Please note that medical electrical equipment is also used in other parts of a hospital in addition to its wards. Always turn off your terminal in lobbies and waiting rooms as well.

- **When you are in a place where you may be near to people with implantable cardiac pacemakers or implantable cardioverter defibrillators, such as in a crowded train**

The terminal may exert a harmful effect on implantable cardiac pacemakers and implantable cardioverter defibrillators.

**Always set to public mode
in case below**

- **When driving**

A penalty may be imposed for using by holding a mobile phone while driving.

Absolutely necessary cases such as rescue of a sick person or maintaining public's safety are exempted.

- **When you are in a public place such as a theater, movie theater, or museum**

Using the terminal in a public place, where you need to be quiet, annoys people around you.

**Be considerate of where you use
your terminal and keep your voice
and ringtone down**

- **Keep your voice down in quiet places like restaurants and hotel lobbies, etc.**
- **If you are in an outdoor public place, make sure you do not disturb others.**

Respect privacy

- ! Please be considerate of the privacy of individuals around you when taking and sending photos using camera-equipped mobile phones.

Functions for maintaining good manners in public places

There are some advanced setting such as not answering incoming call or muting sound, etc.

■ Public mode (power OFF) (P.175)

Tells the caller via a guidance message that receiver need to turn the power off, and the call ends automatically.

■ Vibration (P.265)

Notify the call by vibration.

■ Silent mode (P.262)

Mute sound/ringtone, etc.

※ Shutter sound cannot be muted.

Besides these things, option services such as voice mail (P.174), call forwarding (P.174), etc. are available.



モバイル・リサイクル・ネットワーク
携帯電話・PHSのリサイクルにご協力を。

Bring no longer needed mobile telephones, etc. to your nearest docomo Shop to be recycled regardless of whether the products were manufactured by DOCOMO or by other companies.

- * Recyclables: mobile telephones, PHS, batteries, battery chargers, tabletop stands (regardless of whether manufactured by DOCOMO or by other companies)

**Loss or theft of terminal or payment of
cumulative cost overseas
<docomo Information Center>
(available 24 hours a day)**

From DOCOMO mobile phones

**International call
access code for the
country you stay**

-81-3-6832-6600*
(toll free)

- * You are charged a call fee to Japan when calling from a land-line phone, etc.
- * From SC-06D, call +81-3-6832-6600 (to enter "+" touch and hold "0").

**From land-line phone
<Universal number>**

**Universal number
international prefix**

-8000120-0151*

- * You might be charged a domestic call fee according to the call rate for the country you stay.
 - * For international call access codes for major countries and universal number international prefix, refer to DOCOMO International Service website.
- If you lose your terminal or have it stolen, immediately take the steps necessary for suspending the use

Failures encountered overseas
<Network Support and Operation Center>
(available 24 hours a day)

From DOCOMO mobile phones

**International call
access code for the
country you stay**

-81-3-6718-1414*
(toll free)

- * You are charged a call fee to Japan when calling from a land-line phone, etc.
- * From SC-06D, call +81-3-6718-1414 (to enter "+" touch and hold "0").

From land-line phone
<Universal number>

**Universal number
international prefix**

-8005931-8600*

- * You might be charged a domestic call fee according to the call rate for the country you stay.
 - * For international call access codes for major countries and universal number international prefix, refer to DOCOMO International Service website.
- If the terminal you purchased is damaged, bring your terminal to a repair counter specified by DOCOMO after returning to Japan.

General Inquiries <docomo Information Center>

(Business hours: 9:00 a.m. to 8:00 p.m.)

 **0120-005-250** (toll free)

* Service available in: English, Portuguese, Chinese, Spanish, Korean.

* Unavailable from part of IP phones.

■ From DOCOMO mobile phones
(In Japanese only)

 (No prefix) **151** (toll free)

* Unavailable from land-line phones,
etc.

■ From land-line phones
(In Japanese only)

 **0120-800-000**

* Unavailable from part of IP
phones.

(Business hours: 9:00 a.m. to 8:00 p.m. (open all year round))

Repairs

■ From DOCOMO mobile phones
(In Japanese only)

 (No prefix) **113** (toll free)

* Unavailable from land-line phones,
etc.

■ From land-line phones
(In Japanese only)

 **0120-800-000**

* Unavailable from part of IP
phones.

(Business hours: 24 hours (open all year round))

● Please confirm the phone number before you dial.

● For Applications or Repairs and After-Sales Service, please
contact the above-mentioned information center or the docomo
Shop etc. near you searched on the NTT DOCOMO website.

NTT DOCOMO website <http://www.nttdocomo.co.jp/english/>

Inquiries for sample accessories

■ Samsung Electronics Co., Ltd.

072-830-6075 (In Japanese only)

Business hours: 9:00 a.m. to 5:00 p.m. (except for Saturday,
Sunday, year-end through New Year holidays, public holidays)

● Please confirm the phone number before you dial.

● Check the supplied sample accessories in this manual.



Li-ion 00



Don't forget your mobile phone ... or your manners!

When using your mobile phone in a public place, don't forget to
show common courtesy and consideration to others around you.

Sales: NTT DOCOMO, INC.

Manufacturer: Samsung Electronics Co., Ltd.

'12.6 (1st Edition)