



हिन्दी
ENGLISH



GB210


यह निर्देशिका आपकी आपके नए मोबाइल को समझने में मदद करेगी. यह आपको आपके फोन में दी गई सुविधाओं के बारे में उपयोगी जानकारी देता है.

इस निर्देशिका की कुछ सामग्री आपके फोन के सॉफ्टवेयर या आपके सेवा प्रदाता के आधार पर आपके फोन से अलग हो सकती है.

www.lgmobile.com

P/N : MMBB0324402 (1.1)

C € 0168

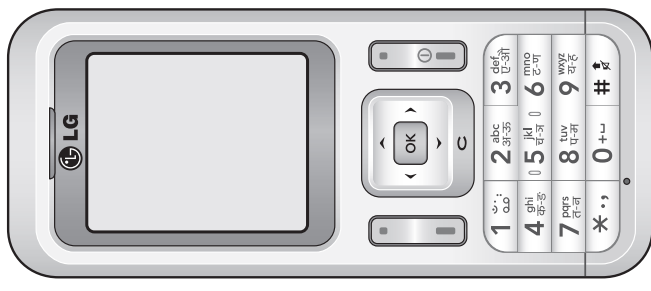

Bluetooth QD ID B014921

GB210 उपयोगकर्ता निर्देशिका - हिन्दी

यह निर्देशिका आपकी आपके नए मोबाइल को समझने में मदद करेगी. यह आपको आपके फोन में दी गई सुविधाओं के बारे में उपयोगी जानकारी देता है.

इस निर्देशिका की कुछ सामग्री आपके फोन के सॉफ्टवेयर या आपके सेवा प्रदाता के आधार पर आपके फोन से अलग हो सकती है.



अपने फोन को जानें

ईयरपीस

प्रदर्शन स्क्रीन

सॉफ्ट कुंजी

इनमें से प्रत्येक कुंजी, कुंजी के ऊपर दर्शाए गए पाठ के अनुसार कार्य करती हैं.

भेजे कुंजी

आप कोई फोन नंबर डायल कर सकते हैं और आने वाली कॉल्स का उत्तर दे सकते हैं.

समाप्त

इससे आप फोन चालू या बंद कर सकते हैं, कॉल समाप्त कर सकते हैं.

नेविगेशन कुंजियाँ

फोन फंक्शनों पर तेजी से पहुँचने के लिए उपयोग करें.

पुष्टि करें कुंजी


मेनू विकल्पों का चयन करता है और कारवाई की पुष्टि करता है.


समाप्त/पॉवर कुंजी

इससे आप फोन चालू या बंद कर सकते हैं, कॉल समाप्त कर सकते हैं, या स्टैंडबाई मोड पर लौट सकते हैं.

अल्फान्यूमेरिक कुंजियाँ

इन कुंजियों का उपयोग स्टैंडबाई मोड में नंबर डायल करने और संपादन मोड में संख्या या वर्ण दर्ज करने के लिए किया जा सकता है.

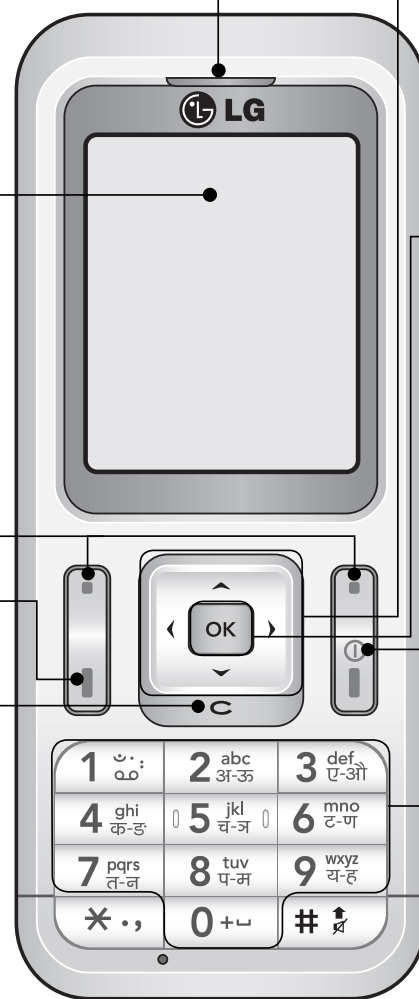

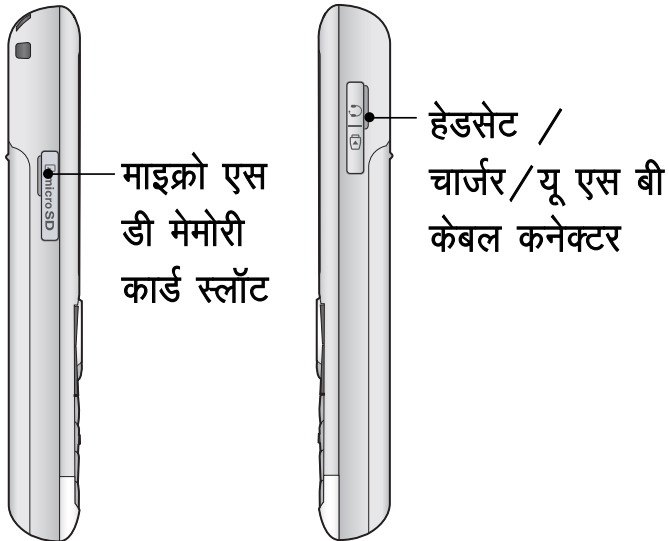

नोट: स्वतः की लॉक


कसी बटन को आकस्मिक दब जाने से बचाने के लिए GB210 को एक निश्चित समय के बाद अपने आप लॉक किया जा सकता है कीपैड को अनलॉक करने के लिए पहले बायीं सॉफ्ट कुंजी अनलॉक दबाएँ और फिर दाहिनी सॉफ्ट कुंजी हाँ दबाएँ.यदि आप इस फंक्शन की सेटिंग बदलना चाहते हैं तो मेनू-सेटिंग्स-सुरक्षा-स्वतः की लॉक पर जाएँ और बंद चुनें या स्वतः की लॉक के लिए समय सेट करें

मेमोरी कार्ड लगाना

स्लॉट के ऊपर वाले हिस्से में मेमोरी कार्ड डालें, सुनिश्चित करें कि चमकदार हिस्सा निचें की तरफ हो

मेमोरी कार्ड कवर इस तरह बंद करें कि वह क्लिक की आवाज के साथ बंद हो.

मेमोरी कार्ड निकालना: चित्र में दिखाए अनुसार उसे आगे खिसकाएँ

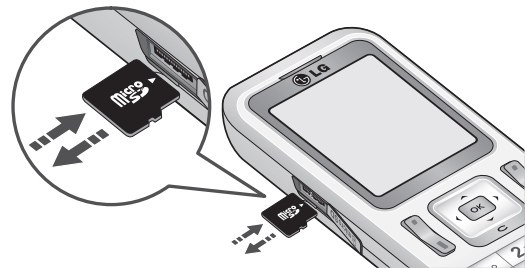

युक्ति! स्मृति कार्ड एक वैकल्पिक सहायक सामग्री है.

मेमोरी कार्ड स्वरूपित करना

मेनू दबाएँ और सेटिंग्स चुनें, मेमोरी स्थिति चुनें बाह्य मेमोरी चुनें और प्रारूप दबाएँ

चेतावनी: जब आप अपना मेमोरी कार्ड स्वरूपित करते हैं तो सभी सामग्री हटा दी जाती है. यदि आप मेमोरी कार्ड का डेटा खोना नहीं चाहते हैं तो पहले उसका बैक अप ले लें.

सिम कार्ड इंस्टॉल करना और बैटरी चार्ज करना






सिम कार्ड इंस्टॉल करना

किसी सेल्युलर नेटवर्क के सदस्य बनने पर, आपको आपके सदस्यता विवरण जैसे आपका पिन, उपलब्ध वैकल्पिक सेवाएँ और अन्य जानकारी वाला प्लग-इन सिम कार्ड दिया जाएगा.

महत्वपूर्ण! > प्लग-इन सिम कार्ड और उसके संपर्क खरोंचों से और मुड़ने से आसानी से क्षतिग्रस्त हो सकते हैं, इसलिए कार्ड रखते, डालते, और निकालते समय सावधानी रखें. सभी सिम कार्ड को छोटे बच्चों की पहुँच से दूर रखें.

चित्रांकन

- 1 बैटरी कवर खोलें
- 2 बैटरी निकालें
- 3 सिम डालें
- 4 बैटरी इंस्टॉल करें
- 5 बैटरी का कवर बंद करें
- 6 बैटरी चार्ज करें

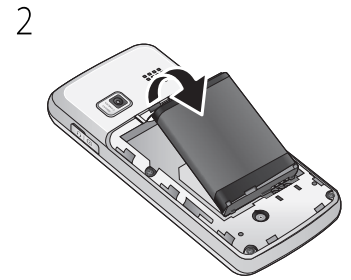

चेतावनी: जब फोन चालू हो तब बैटरी न निकालें क्योंकि इससे फोन में खराबी आ सकती है.

मेनू मैप



गेम्स और अनुप्रयोग

- 1 गेम्स
- 2 अनुप्रयोग
- 3 नेटवर्क की रूपरेखाएँ



कॉल इतिहास

- 1 सभी कॉल
- 2 छूटे कॉल
- 3 डायल किए हुए कॉल
- 4 प्राप्त कॉल
- 5 कॉल अवधि
- 6 कॉल कीमत
- 7 डेटा जानकारी



आयोजक

- 1 कैलेंडर
- 2 मेमोरी
- 3 करने के लिए



मल्टीमीडिया

- 1 MP3 प्लेयर
- 2 कैमरा
- 3 वीडियो कैमरा
- 4 एफएम रेडियो
- 5 वॉइस रिकॉर्डर



संदेश

- 1 नया संदेश
- 2 इनबॉक्स
- 3 ब्लूटूथ बॉक्स
- 4 प्रारूप
- 5 आउटबॉक्स
- 6 प्रेषित
- 7 वॉइसमेल सुनें
- 8 जानकारी संदेश
- 9 टेम्पलेट्स
- 0 सेटिंग्स



मेरी चीजें

- 1 चित्र
- 2 ध्वनि
- 3 वीडियो
- 4 अन्य
- 5 खेल और अनुप्रयोग



प्रोफाइल्स

- 1 सामान्य
- 2 मौन
- 3 शीघ्र डायल्स
- 4 आउटडोर
- 5 हेडसेट



संपर्क

- 1 खोजें
- 2 नया संपर्क
- 3 शीघ्र डायल्स
- 4 समूह
- 5 सभी की प्रतिलिपि बनाएँ
- 6 सभी हटाएँ
- 7 सेटिंग्स
- 8 जानकारी



उपकरण

- 1 अलार्म घड़ी
- 2 कैलकुलेटर
- 3 स्टॉपवॉच
- 4 इकाई परिवर्तक
- 5 विश्व घड़ी
- 6 सिम सेवा



ब्राउजर

- 1 होम
- 2 Google खोज
- 3 बुकमार्क
- 4 पता दर्ज करें
- 5 इतिहास
- 6 सुरक्षित पृष्ठ
- 7 सेटिंग्स
- 8 जानकारी



संयोजकता

- 1 ब्लूटूथ
- 2 नेटवर्क
- 3 USB कनेक्शन



सेटिंग्स

- 1 दिनांक और समय
- 2 भाषाएँ
- 3 प्रदर्शित करें
- 4 शॉर्टकट
- 5 कॉल
- 6 सुरक्षा
- 7 फ्लाइंग मोड
- 8 ऊर्जा बचत
- 9 रीसेट करें
- 0 मेमोरी स्थिति

कॉल

कॉल करना

- 1 कीपैड का उपयोग करके संख्या लिखें. कोई संख्या हटाने के लिए  दबाएँ.
- 2 कॉल प्रारंभ करने के लिए भेजें कुंजी दबाएँ.
- 3 कॉल समाप्त करने के लिए, समाप्त कुंजी दबाएँ.

युक्ति! अन्तर्राष्ट्रीय कॉल करने के लिए + दर्ज करने हेतु 0 दबाकर रखें.

युक्ति! कॉल के दौरान वॉल्यूम समायोजित करने के लिए,  और  का उपयोग करें.

अपने संपर्क से कॉल करना

- 1  पता पुस्तिका खोलने के लिए दबाएँ.
- 2 जिस संपर्क को आप कॉल करना चाहते हैं, कीपैड का उपयोग कर उसका पहला अक्षर लिखें. उदाहरण के लिए Office लिखने के लिए लिए, तीन बार 6 दबाएँ.
- 3 संपर्क और उनके विभिन्न नंबरों पर स्कॉल करने के लिए  और  का उपयोग करें.
- 4 कॉल प्रारंभ करने के लिए भेजें कुंजी दबाएँ.

कॉल का उत्तर देना और अस्वीकार करना

फोन की घंटी बजने पर कॉल का उत्तर देने के लिए स्वीकारें दबाएँ या भेजें कुंजी दबाएँ.

जब आपका फोन बज रहा हो, तो बजना बंद करने के लिए मौन चुनें यदि आप किसी मीटिंग के लिए अपनी प्रोफाइल को मौन पर बदलना भूल गए हैं तो ऐसा करना बेहतर होगा.

आवक कॉल अस्वीकार करने के लिए समाप्त कुंजी या अस्वीकारें दबाएँ.

नोट: अस्वीकृत कॉल छूटी कॉल सूची में दिखाई देगी.

स्पीकर फोन का उपयोग करना

कॉल के दौरान, आप OK कुंजी दबाते हुए स्पीकर फोन सक्रिय कर सकते हैं और हैंड्स-फ्री में हैंडसेट का उपयोग कर सकते हैं.

स्पीकर फोन सक्रिय हो तो, सामान्य हैंडसेट वार्तालाप मोड जारी रखने के लिए फिर से OK कुंजी दबाएँ.

अपना कॉल लॉग्स देखना

आप छूटी, प्राप्त, और डायल की हुई कॉल्स के रिकॉर्ड की जाँच कर सकते हैं, यदि नेटवर्क सेवा

क्षेत्र में कॉलिंग लाइन आइडेंटिफिकेशन (CLI) का समर्थन करता है. नंबर अथवा नाम दिनांक और समय सहित, जिस समय कॉल किया गया, साथ में प्रदर्शित होते हैं. आप कॉल अवधि भी देख सकते हैं. **मेनू** दबाएँ, **कॉल इतिहास** का चयन करें.

कॉल सेटिंग्स बदलना

आप किसी कॉल से संबद्ध मेनू सेट कर सकते हैं. **मेनू** दबाएँ, सेटिंग्स चुनें और कॉल चुनें

- **कॉल अंतरण** – अपनी कॉल्स अंतरण करना या न करना चुनें.
- **कॉल रोधन** – जब आप कॉल रोधित करना चाहें तब इसका चयन करें.
- **सीमित डायल नंबर** – उन नंबरों की सूची चुनें जिन्हें आपके फोन से कॉल किया जा सकता है. आपको अपने ऑपरेटर से पिन2 कोड की आवश्यकता होगी. केवल सीमित डायल सूची में शामिल नंबरों को आपके फोन से कॉल किया जा सकता है.
- **उत्तर मोड** – चुनें कि किसी भी कुंजी से फोन का उत्तर देना है या केवल भेजें कुंजी से.

- **मेरा नंबर भेजें** – चुनें कि किसी को कॉल करते समय आपका नंबर दिखाया जाए या नहीं. (आपके नेटवर्क प्रदाता पर निर्भर करता है.)
- **कॉल प्रतीक्षा** – कोई कॉल प्रतीक्षा में होने पर सचेत करता है. (आपके नेटवर्क प्रदाता पर निर्भर करता है.)
- **मिनट माइंडर** – किसी कॉल के दौरान प्रत्येक मिनट पर टोन सुनने के लिए **चालू** चुनें.
- **स्वतः रीडायल** – **चालू** या **बंद** चुनें.
- **DTMF टोन भेजें** – **चालू** या **बंद** चुनें.

संपर्क

कोई संपर्क खोजना

- 1 संपर्क दबाएँ और खोजें चुनें, मेनू स्क्रीन में से संपर्क चुनें या स्टैंडबाय स्क्रीन से  चुनें.
- 2 जिस संपर्क को आप कॉल करना चाहते हैं उसका पहला अक्षर लिखने के लिए कीपैड का उपयोग करें. डटाहरण के लिए Office लिखने के लिए लिए, तीन बार 6 दबाएँ. फिर खोजें दबाएँ.
- 3 संपर्क और उनके विभिन्न नंबरों पर स्कॉल करने के लिए  और  उपयोग कर.

टिप! फोन के संपर्क सूची में दो LG ग्राहक सेवा नंबर प्रदान किया गया हैं. जिसे आप सीधे LG ग्राहक सेवा 1 में कॉल कर सकते हैं या LG ग्राहक सेवा 2 के क्षेत्र कोड को संपादित कर के आप कॉल कर सकते हैं.

नया संपर्क जोड़ना

- 1 संपर्क दबाएँ और नया संपर्क चुनें.
- 2 चुनें कि आपके संपर्क **फोन** या **सिम** कार्ड में संग्रहीत किए जाएँ.
- 3 उपलब्ध कराई गए फील्ड में सभी जानकारीयाँ दर्ज करें और **सहेजें** चुनें.

नोट: जब आप किसी संपर्क का ई-मेल पता संग्रहीत करते हैं तो कोई प्रतीक दर्ज करने के लिए  दबाएँ और  और  तब तक स्कॉल करें जबतक @ न दिखाई दे

संदेश सेवा

आपके GB210 में एसएमएस (लघु संदेश सेवा), एमएमएस (मल्टीमीडिया संदेश सेवा) और ब्लूटूथ, सहित नेटवर्क के सेवा संदेशों से संबंधित सुविधाएँ हैं.

संदेश भेजना

- 1 **मेनू** दबाएँ, **संदेश भेजना** चुनें और **नया संदेश** का चयन करें.
- 2 एसएमएस या एमएमएस भेजने के लिए **संदेश** चुनें.
- 3 नया संदेश संपादक खुलेगा. संदेश संपादक एसएमएस और एमएमएस को एक अन्तरप्रेरण में संयुक्त करता है और एसएमएस मोड और एमएमएस मोड के बीच स्विच करना सरल बनाता है. संदेश संपादक की डिफॉल्ट सेटिंग एसएमएस मोड है.
- 4 T9 प्रीडिक्टिव मोड या ABC मैनुअल मोड का उपयोग करते हुए अपना संदेश लिखें. आप  दबाते हुए पाठ इनपुट मोड पर जा सकते हैं.
- 5 विकल्प चुनें और कोई छवि, ध्वनि, वीडियो, प्रतीक, पाठ टेम्पलेट, इमोटिकॉन, नाम और क्रमांक, नई स्लाइड, विषय, या अन्य (संपर्क/मेरा व्यावसायिक कार्ड/शेड्यूल/मेमो/टु-डू) जोड़ने के लिए सम्मिलित करें का चयन करें.
- 6 **विकल्प** दबाएँ और **इसे भेजें** का चयन करें.
- 7 फोन नंबर दर्ज करें या **विकल्प** दबाएँ और

अपने संपर्कों की सूची खोलने के लिए **संपर्क** या **हाल की सूची** चुनें. आप एक से अधिक संपर्क जोड़ सकते हैं.

8 भेजें दबाएँ.

युक्ति! संदेश फील्ड में 1 पृष्ठ से अधिक लंबा पाठ दर्ज करने पर आप अपना संदेश प्रकार एसएमएस या एमएमएस के रूप में चुन सकते हैं. यदि आप भेजे जाने वाले संदेश का प्रकार बदलना चाहते हैं, तो **मेनू > संदेश सेवा > सेटिंग > पाठ संदेश** दबाएँ, और **लंबे पाठ ऐसे भेजें** का चयन करें.

चेतावनी: यदि संदेश संपादक में कोई छवि, ध्वनि, वीडियो, नई स्लाइड या विषय जोड़े जाते हैं, तो वह स्वतः एमएमएस मोड में परिवर्तित हो जाएगा और आपसे इसके अनुसार शुल्क लिया जाएगा.

नोट: आप अनेक प्रयोक्ताओं को एक ही समय पर संदेश भेज सकते हैं.

विकल्प: "अनेक को भेजे" यह संपर्क सूची में खुलेगा, जहाँ पे उपयोगकर्ता संपर्कों को चिह्नित/अचिह्नित कर के संदेश भेज सकते हैं. पहले 100 संपर्क चुने जायेंगे, यदि आप "सभी चिह्नित करें" को चुनेंगे. यदि संदेश किसी विशेष संपर्क के समूह को भेजना चाहते हैं तो संदेश लिखने के बाद "समूह को भेजें" विकल्प को चुनें.

ब्लूटूथ संदेश

ब्लूटूथ के माध्यम से संदेश भेजने/प्राप्त करने के लिए आपको ब्लूटूथ चालू करना होगा.

ब्लूटूथ बॉक्स

ब्लूटूथ द्वारा आपको प्राप्त होने वाले सभी संदेश आपके ब्लूटूथ इनबॉक्स में होते हैं. यहाँ आप अपने संदेश पढ़ सकते हैं, उनका उत्तर दे सकते हैं और उन्हें फॉरवर्ड कर सकते हैं.

पाठ लिखना

आप फोन के कीपैड का उपयोग कर अल्फान्यूमेरिक वर्ण दर्ज कर सकते हैं. उदाहरण के लिए संपर्कों में नाम संग्रहीत करना, संदेश लिखना और कैलेंडर में इवेंट शेड्यूल बनाना सभी के लिए पाठ लिखना आवश्यक है. फोन में निम्न पाठ इनपुट पद्धतियाँ उपलब्ध हैं T9 प्रीडिक्टिव मोड, ABC मैनुअल मोड और 123 मोड.

नोट: कुछ फील्ड में केवल एक पाठ इनपुट पद्धति की ही अनुमति होती है (जैसे कि पता पुस्तिका फील्ड में टेलीफोन नंबर).

T9 प्रीडिक्टिव मोड

T9 प्रीडिक्टिव मोड उन शब्दों को पहचानने के लिए अंतर्निहित शब्दकोश का उपयोग उन कुंजियों के क्रम के आधार पर करता है, जो आप लिखते समय दबाते हैं। एक बार सारे अक्षर दर्ज हो जाने के बाद उससे संबद्ध केवल नंबर कुंजी दबाएँ, और शब्दकोश आपके लिखते ही शब्द को पहचान लेगा।

ABC मैनुअल मोड

इस मोड से आप आवश्यक अक्षर वाली कुंजी को अक्षर के दिखने तक एक, दो, तीन या चार बार दबाकर दर्ज कर सकते हैं।

123 मोड

प्रति अंक एक कुंजीघात का उपयोग करते हुए अंक लिखें। आप वर्ण मोड्स में रहते हुए भी इच्छित कुंजी को दबाए रखकर अंक जोड़ सकते हैं।

अक्षर व अंक प्रविष्ट करने की तालिका

बटन	अक्षर/अंक (बटनों को इतनी बार दबाएं)													
	1 बार	2 बार	3 बार	4 बार	5 बार	6 बार	7 बार	8 बार	9 बार	10 बार	11 बार	12 बार	13 बार	14 बार
1	ˆ	˙	˚	˛	1									
2	।	ि	ी	ु	ॄ	ॆ	अ	आ	इ	ई	उ	ऊ	त्र	2
3	ँ	ॢ	ँ	ो	ौ	ँ	ए	ऐ	ँ	ओ	औ	ऑ	3	
4	क	ख	ग	घ	ङ	4	क	ख	ग					
5	च	छ	ज	झ	ञ	5	ज							
6	ट	ठ	ड	ढ	ण	6	ड	ढ						
7	त	थ	द	ध	न	7	न							
8	प	फ	ब	भ	म	8	फ							
9	य	र	ल	व	श	ष	स	ह	9	ळ	र	ळ	य	
0	—													

हिन्दी शब्द लिखने के उदाहरण

1) किताब

- क : — बटन 4 को 1 बार दबाएँ.
ि : — बटन 2 को 2 बार दबाएँ.
त : — बटन 7 को 1 बार दबाएँ.
ा : — बटन 2 को 1 बार दबाएँ.
ब : — बटन 8 को 3 बार दबाएँ.

2) क्षत्रिय

- क : — बटन 4 को 1 बार दबाएँ.
् : — बटन 1 को 4 बार दबाएँ.
ष : — बटन 9 को 6 बार दबाएँ.
त : — बटन 7 को 1 बार दबाएँ.
् : — बटन 1 को 4 बार दबाएँ.
र : — बटन 9 को 2 बार दबाएँ.
ि : — बटन 2 को 2 बार दबाएँ.
य : — बटन 9 को 1 बार दबाएँ.

3) ज्ञानी

- ज : — बटन 5 को 3 बार दबाएँ.
् : — बटन 1 को 4 बार दबाएँ.
ञ : — बटन 5 को 5 बार दबाएँ.
ा : — बटन 2 को 1 बार दबाएँ.
न : — बटन 7 को 5 बार दबाएँ.
ी : — बटन 2 को 3 बार दबाएँ.

MP3 प्लेयर

आपके GB210 में एक अंतर्निहित MP3 प्लेयर है, इसलिए आप अपना पसंदीदा संगीत बजा सकते हैं.

कोई गाना चलाना

- 1 मेनू दबाएँ और मल्टीमीडिया चुनें, और फिर MP3 प्लेयर का चयन करें.
- 2 सभी गीतों का चयन करें और फिर इच्छित गाना चुनें. ठीक ► कुंजी दबाएँ.
- 3 जब संगीत चल रहा हो ► तो गाना रोकने के लिए ठीक कुंजी दबाएँ.
- 4 ►► अगले गाने पर जाने के लिए दबाएँ.
- 5 ◀◀ पिछले गाने पर जाने के लिए दबाएँ.
- 6 जब संगीत चल रहा हो (►), तो ठीक कुंजी दबाएँ और संगीत रोकने के लिए या MP3 प्लेयर मेनू पर लौटने के लिए ◀ चुनें

युक्ति! संगीत सुनते समय वॉल्यूम बदलने के लिए,  और  का उपयोग करें.

युक्ति! जब किसी MP3 प्लेयर पर कोई MP3 ट्रैक चलाया जा रहा हो, तो आप  दबाकर BGM मोड का उपयोग कर सकते हैं. BGM

(बैकग्राउंड म्यूजिक) मोड में, दूसरे फंक्शनों का उपयोग करते हुए भी MP3 चलाया जा सकता है. BGM को MP3 प्लेयर स्क्रीन पर रोका जा सकता है.

कैमरा

तुरंत फोटो लेना

अपने फोन में बने कैमरा मॉड्यूल का उपयोग करके, आप चित्र ले सकते हैं इसके अलावा, आप दूसरे लोगों को फोटो भेज सकते हैं और फोटो को वॉलपेपर के रूप में चुन सकते हैं.

- 1 **मेनू** दबाएँ और व्यूफाइंडर खोलने के लिए **मल्टीमीडिया, कैमरा** चुनें.
- 2 फोन को अनुलंब रूप से पकड़कर लेंस को फोटो के विषय पर केंद्रित करें.
- 3 फोटो लेने के लिए केंद्रीय सॉफ्ट कुंजी दबाएँ.

वीडियो कैमरा

तुरंत वीडियो शूट करना

आप वीडियो क्लिप रिकॉर्ड कर सकते हैं और सहेज सकते हैं.

- 1 **मेनू** दबाएँ और **मल्टीमीडिया** चुनें, व्यूफाइंडर खोलने के लिए **वीडियो कैमरा** नीचे स्क्रॉल करें और चुनें.
- 2 कैमरा लेंस को वीडियो के विषय पर केंद्रित करें.
- 3 रिकॉर्डिंग शुरू करने के लिए केंद्रीय सॉफ्ट कुंजी दबाएँ.
- 4 **रिकॉ.** व्यूफाइंडर के निचले बाएँ कोने में दिखाई देगी और टाइमर आपके वीडियो की लंबाई दिखाएगा.
- 5 रिकॉर्डिंग रोकने के लिए **बंद करें** दबाएँ.

एफएम रेडियो

आपके GB210 में एफएम रेडियो सुविधा है, जिससे आप चलते-फिरते समय भी अपने पसंदीदा रेडियो स्टेशन को सुनने के लिए ट्यून इन कर सकते हैं.

नोट: रेडियो सुनने के लिए आपको अपना हेडसेट लगाना होगा. हेडसेट के सॉकेट में प्लग डालें (यह उस सॉकेट के समान होता है, जिसमें आप अपना चार्जर लगाते हैं).

रेडियो सुनना

- 1 मेनू दबाएँ और **मल्टीमीडिया** चुनें और फिर **एफएम रेडियो** चुनें.
- 2 उस स्टेशन का चैनल नंबर चुनें जिसे आप सुनना चाहते हैं.

युक्ति! रेडियो सुनते समय वॉल्यूम बदलने के लिए,  और  का उपयोग करें.

युक्ति! आप बिल्ट-इन स्पीकर द्वारा रेडियो को सुन सकते हैं. **विकल्प** दबाएँ, **इसके द्वारा सुनें** चुनें और **स्पीकर** चुनें.

युक्ति! जब हेडसेट के माध्यम से एफएम सुन रहे हैं, आप हेडसेट कुंजी को कम प्रेस के माध्यम से एफएम रेडियो चैनल बदल सकते हैं. यदि हेडसेट डीप स्लीप मोड में हो और कीपैड लाक हो, उस समय अगर हेडसेट कुंजी को लंबे प्रेस करे तो एक ही समय में बेक लाइट चालू और एफएम रेडियो चैनल बदल जायेगा.

वॉइस रिकॉर्डर

वॉइस मेमो या अन्य ध्वनियाँ रिकॉर्ड करने के लिए अपने **वॉइस रिकॉर्डर** का उपयोग करें.

अपने वॉइस मेमो को रिकॉर्ड करना

- 1 मेनू दबाएँ और **मल्टीमीडिया** का चयन करें, फिर **वॉइस रिकॉर्डर** चुनें.
- 2 रिकॉर्डिंग शुरू करने के लिए  दबाएँ.
- 3 रिकॉर्डिंग बंद करने के लिए **बंद करें** चुनें.
- 4 **विकल्प** दबाएँ और वॉइस मेमो को सुनने के लिए **चलाएँ** का चयन करें.

युक्ति! **विकल्प** और **एल्बम** को चुनकर सहेजी गई सभी वॉइस रिकॉर्डिंग्स को आप सुन सकते हैं.

मेरी चीजें

आप अपने फोन की मेमोरी में कोई भी मल्टीमीडिया फाइलें संग्रहीत कर सकते हैं, जिससे आपको अपनी सभी छवियों, ध्वनियों, वीडियो, अन्य चीजों और गेम्स पर पहुँच आसान हो. आप अपनी फाइलों को मेमोरी कार्ड में भी सहेज सकते हैं. मेमोरी कार्ड उपयोग करने का लाभ यह है कि आप अपने फोन की मेमोरी का स्थान खाली कर सकते हैं. आपकी सभी मल्टीमीडिया फाइलें **मेरी चीजें** में सहेजी जाएँगी. **मेनू** दबाएँ और फिर फोल्डरों की सूची खोलने के लिए **मेरी चीजें** चुनें.

खेल और अनुप्रयोग

आपके GB210 में पहले से लोड किए गए गेम्स हैं, ताकि आप खाली समय में भी मन बहला सकें। यदि आप कोई अतिरिक्त गेम या अनुप्रयोग डाउनलोड करना चाहते हैं तो वे इस फोल्डर में सहेजे जाएँगे। **मेनू** दबाएँ और खेल और अनुप्रयोग चुनें।

GB210, पूर्व लोडेड अनुप्रयोगों के साथ मे भी आता हैं।

- **डेटा थैली** - यह अनुप्रयोग व्यक्तिगत जानकारी रखने के लिए प्रयोग किया जाता हैं। (बैंक खाता/क्रेडिट कार्ड/ऋण राशि/ईमेल आईडी विवरण)
- **LG Help Desk** - इस अनुप्रयोग में LG मोबाइल सेवा केंद्र/ कॉल सेन्टर नंबर डायरेक्टरी दिया गया हैं।

आयोजक / उपकरण

कैलेंडर का उपयोग करना

(मेनू > आयोजक > कैलेंडर)

जब आप इस मेनू में आते हैं, तो कैलेंडर दिखाई देता है। वर्तमान दिनांक पर वर्गाकार कर्सर स्थित

होता है। आप नेविगेशन कुंजियों का उपयोग करके कर्सर को अन्य दिनांक पर ले जा सकते हैं।

कोई मेमो जोड़ना

(मेनू > आयोजक > मेमो)

आप अपने मेमो यहाँ पंजीकृत कर सकते हैं।

आपकी करने के लिए सूची में कोई आइटम जोड़ना

(मेनू > आयोजक > करने के लिए)

आप करने के लिए कार्य देख सकते हैं, संपादित कर सकते हैं, और जोड़ सकते हैं।

आपका अलार्म सेट करना

(मेनू > उपकरण > अलार्म घड़ी)

आप किसी निर्दिष्ट समय में बाहर जाने के लिए 5 अलार्म घड़ियाँ तक सेट कर सकते हैं।

आपके कैलकुलेटर का उपयोग करना

(मेनू > उपकरण > कैलकुलेटर)

कैलकुलेटर मूलभूत गणितीय फंक्शंस जोड़, घटाव, गुणा और भाग प्रदान करता है।

स्टॉपवॉच का उपयोग करना

(मेनू > उपकरण > स्टॉपवॉच)

इस विकल्प द्वारा आप विराम घड़ी का फंक्शन उपयोग कर सकते हैं.

किसी इकाई को परिवर्तित करना

(मेनू > उपकरण > इकाई परिवर्तक)

यह कई मापों को आपकी इच्छित इकाई में परिवर्तित करता है.

आपकी विश्व घड़ी में कोई शहर जोड़ना

(मेनू > उपकरण > विश्व घड़ी)

आप विश्व घड़ी की सूची में वह शहर जोड़ सकते हैं जिसकी आपको आवश्यकता है. आप ग्रीनविच मीन टाइम (GMT) का वर्तमान समय और दुनिया के प्रमुख शहरों का वर्तमान समय जाँच सकते हैं.

सिम सेवाएँ

(मेनू > उपकरण > सिम सेवाएँ)

यह सुविधा सिम और नेटवर्क सेवा पर निर्भर करती है. यदि सिम कार्ड STK(अर्थात सिम टूलकिट ऐप्लिकेशन) सेवाओं का समर्थन करता है, तो यह मेनू ऑपरेटर विशिष्ट सेवा नाम हो जाएगा जो SIM कार्ड में संग्रहीत होता है.

ब्राउजर

वेब को एक्सेस करना

आप वेब ब्राउजर लॉन्च कर सकते हैं और सक्रिय प्रोफाइल के होमपेज को ब्राउजिंग सेटिंग्स पर एक्सेस कर सकते हैं. आप मैनुअली भी यूआरएल पता दर्ज कर सकते हैं और संबंधित वेब पेज एक्सेस कर सकते हैं.

- 1 मेनू दबाएँ और **ब्राउजर** का चयन करें.
- 2 ब्राउजर के होमपेज तक सीधे पहुँचने के लिए, **होमपेज** का चयन करें. वैकल्पिक रूप से, **पता दर्ज करें** चुनें और अपना इच्छित यूआरएल लिखें.

नोट: इस सेवा से कनेक्ट होने और सामग्री डाउनलोड करने के लिए अतिरिक्त शुल्क लगाया जाता है. अपने नेटवर्क प्रदाता से अपने डेटा शुल्क का पता करें.

नोट: Google Mobile इंटरनेट सेवा पर पहुँच सकते हैं.

Google खोज सेवाओं पर पहुँचने के लिए, मेनू दबाएँ और ब्राउजर चुनकर Google खोज चुनें.

नोट: यह नेटवर्क सेवाओं पर निर्भर है. संभव है कि आप कुछ देशों में Google खोज पर न पहुँच सकें.

संयोजकता

अपनी संयोजकता बदलना

(मेनू > संयोजकता)

आपकी संयोजकता सेटिंग्स आपके नेटवर्क ऑपरेटर द्वारा पहले ही सेट कर दी गई है, इसलिए आप बिना कोई सेटिंग किए सीधे ही उसका उपयोग शुरू कर सकते हैं। यदि आप कोई सेटिंग बदलना चाहते हैं, तो इस मेनू का उपयोग करें।

आप इस मेनू में नेटवर्क सेटिंग और डेटा एक्सेस प्रोफाइलों को कॉन्फिगर कर सकते हैं।

- **ब्लूटूथ** – अपने GB210 को ब्लूटूथ उपयोग के लिए सेट करें। आप स्वयं को अन्य डिवाइसेस के लिए दर्शा सकते हैं या उन डिवाइस से खोज सकते हैं जिनसे आपका फोन जुड़ा है।
- **नेटवर्क** – आपका GB210 आपके पसंदीदा नेटवर्क से अपने आप कनेक्ट हो जाता है। इन सेटिंग्स को बदलने के लिए इस मेनू का उपयोग करें। इस मेनू का उपयोग करके आप नए एक्सेस पॉइंट भी जोड़ सकते हैं।
- **यूएसबी कनेक्शन** – डेटा सेवा चुनें और अपने GB210 को LG PC Suite सॉफ्टवेयर का अपने

फोन से फाइलें कॉपी करने के लिए उपयोग कर सिंक्रनाइज करें। यदि मेमारी कार्ड लगा हुआ है तो आपके फोन को यूएसबी के रूप में उपयोग करने के लिए मास स्टोरेज चुनें। अपने कंप्यूटर से कनेक्ट करें और फाइलें GB210 निकाले जाने योग्य डिवाइस फोल्डर में ड्रैग और ड्रॉप करें।

नोट: यूएसबी मास स्टोरेज फंक्शन का उपयोग करने के लिए, आपको अपने फोन में बाहरी मेमोरी कार्ड को डालने की आवश्यकता होगी।

अपनी ब्लूटूथ सेटिंग्स बदलना

- 1 मेनू दबाएँ और संयोजकता चुनें। ब्लूटूथ चुनें।
 - 2 ब्लूटूथ सेटिंग चुनें। इनमें अपने परिवर्तन करें:
- **मेरी दृश्यता** – अपना डिवाइस लोगों को दिखाएँ या छुपाएँ चुनें।
 - **मेरा नाम** – अपने GB210 के लिए कोई नाम लिखें।
 - **मेरा पता** – अपने ब्लूटूथ का पता देखें।
 - **प्राथमिक संग्रहण** – वह डिफॉल्ट स्थान चुनें, जिस पर आइटम सहेजे जाने को आप प्राथमिकता देते हैं।

नोट: यूएसबी मास स्टोरेज फंक्शन का उपयोग करने के लिए आपको अपने फोन में बाहरी मेमोरी कार्ड को डालने की आवश्यकता होगी.

दूसरे ब्लूटूथ डिवाइस से जोड़ना

अपन GB210 और किसी अन्य डिवाइस को जोड़कर आप कोई पासकोड सुरक्षित कनेक्शन सेट कर सकते हैं.

- 1 जाँचें कि आपका ब्लूटूथ चालू और दृश्यमान है. आप मेरी दृश्यता और तब दिखाएँ चुन कर ब्लूटूथ सेटिंग्स में आपकी दृश्यता को बदल सकते हैं.
- 2 ब्लूटूथ मेनू से डिवाइसेज सूची चुनें और नया चुनें.
- 3 आपका GB210 डिवाइसेस की खोज करेगा. खोज पूरी होने पर स्क्रीन पर **जोड़ें** और **ताजा करें** दिखाई देंगे.
- 4 आप जिस डिवाइस को जोड़ना चाहते हैं उसे चुनें, **जोड़ें** चुनें और पासकोड डालें फिर **ठीक** चुनें.
- 5 इसके बाद आपका फोन अन्य डिवाइस से कनेक्ट हो जाएगा, जिसमें आपको वही पासकोड लिखना होगा.

6 आपका पासकोड सुरक्षित ब्लूटूथ कनेक्शन अब तैयार है.

प्रोफाइल्स

आपकी प्रोफाइल्स को बदलना
(मेनू > प्रोफाइल्स)

आप अपनी प्रोफाइल को स्टैंडबाय स्क्रीन से शीघ्रता से बदल सकते हैं केवल  दबाएँ और उस प्रोफाइल को चुनें जिसे आप सक्रिय करना चाहते हैं. सामान्य, मौन, केवल कंपन और आउटडोर प्रोफाइल में से चुनें.

सेटिंग्स

अपना दिनांक और समय बदलना
(मेनू > सेटिंग्स > दिनांक और समय)

आप दिनांक और समय से संबंधित फंक्शंस सेट कर सकते हैं.

भाषा बदलना
(मेनू > सेटिंग्स > भाषा)

आप अपने फोन में डिस्प्ले पाठ के लिए भाषा बदल सकते हैं. इस बदलाव से भाषा इनपुट मोड भी प्रभावित होगा.

अपनी प्रदर्शित करें सेटिंग्स बदलना (मेनू > सेटिंग्स > प्रदर्शित करें)

आप फोन डिस्प्ले के लिए सेटिंग्स बदल सकते हैं.

अपनी शार्टकट सेटिंग्स बदलना (मेनू > सेटिंग > शार्टकट)

आप 4 नेविगेशन कुंजियों से शार्टकट बदल सकते हैं.

अपनी सुरक्षा सेटिंग्स बदलना (मेनू > सेटिंग्स > सुरक्षा)

अपन GB210 और उसके द्वारा संरक्षित की जाने वाली महत्वपूर्ण जानकारी को बनाए रखने के लिए अपनी सुरक्षा सेटिंग बदलें.

- **पिन कोड अनुरोध** – एक पिन कोड चुनें जो फोन चालू करने पर माँगा जाए.
- **स्वतः कुंजी लॉक** – यदि आप यह सुविधा सक्रिय करते हैं तो कुंजी स्वतः स्टैंडबाय मोड में, बिना कुंजी की क्रिया के अनुरोध के, लॉक हो जाएगी.
- **फोन लॉक** – पॉवर ऑन होने पर, सिम बदलने पर या तुरंत अपना फोन लॉक करने के लिए सुरक्षा कोड चुनें.

- **अनुप्रयोग लॉक** – फोन मेमोरी, कैलेंडर, मेमो और करने के लिए में छवियों के अनाधिकृत उपयोग से बचने के लिए आप अनुप्रयोग लॉक सेट कर सकते हैं. आपको सुरक्षा कोड की आवश्यकता होगी.
- **एंटी थेफ्ट मोबाइल ट्रैकर** – हैंडसेट वास्तविक स्वामी द्वारा कॉन्फिगर किए गए नंबरों पर एसएमएस भेजता है. उपयोगकर्ता को नाम, प्राथमिक फोन नंबर, द्वितीयक नंबर के साथ ATMT सेटिंग्स को कॉन्फिगर करना होगा. उपयोगकर्ता को ATMT सुविधा सक्रिय करने के लिए ATMT चालू पर सेट करना होगा. डिफॉल्ट ATMT कोड "0000" है. ATMT एसएमएस में चोरी हुए फोन IMEI के बारे में जानकारी, वर्तमान स्थान और उस व्यक्ति का नंबर होगा, जो उस हैंडसेट को उपयोग कर रहा है.
- **कोड्स बदलें** – अपना **सुरक्षा कोड** या पिन2 कोड बदलें.

फ्लाइट मोड का उपयोग करना

(मेनू > सेटिंग्स > फ्लाइट मोड)

फ्लाइट मोड को **चालू** या **बंद** करने के लिए इस फंक्शन का उपयोग करें. **फ्लाइट मोड** के **चालू** होने पर आप कॉल नहीं कर सकेंगे, इंटरनेट से कनेक्ट नहीं हो सकेंगे, संदेश नहीं भेज सकेंगे या ब्लूटूथ उपयोग नहीं कर सकेंगे.

नोट: मैन्युअल रूप से विकल्प चुनते हुए ब्लूटूथ को फ्लाइट मोड में चालू किया जा सकता है.

ऊर्जा बचत

(मेनू > सेटिंग्स > ऊर्जा बचत)

यदि आप **हमेशा चालू** सेट करते हैं, तो फ़ोन को उपयोग न करने पर आप बैटरी ऊर्जा बचा सकते हैं. ऊर्जा बचत सेटिंग्स को **हमेशा चालू**, केवल रात्रि या बंद पर स्विच करने के लिए चुनें.

अपने फ़ोन को रीसेट करना

(मेनू > सेटिंग्स > रीसेट करें)

सभी सेटिंग्स को उनके फैक्ट्री निर्धारण पर **रीसेट** करने के लिए रीसेट का उपयोग करें. इस फंक्शन को सक्रिय करने के लिए आपको सुरक्षा कोड की आवश्यकता होगी. डिफॉल्ट नंबर "0000" है.

मेमोरी स्थिति देखना

(मेनू > सेटिंग्स > मेमोरी स्थिति)

आपके GB210 में तीन मेमोरीज उपलब्ध होती हैं फ़ोन, सिम कार्ड और कोई बाह्य मेमोरी कार्ड (आप मेमोरी कार्ड अलग से खरीद सकते हैं). आप यह निर्धारित करने के लिए मेमोरी प्रबंधक का उपयोग कर सकते हैं कि कितनी मेमोरी प्रयुक्त हो चुकी है और कितनी मेमोरी उपलब्ध है.

सुरक्षित और प्रभावी उपयोग के दिशानिर्देश

कृपया ये आसान दिशानिर्देश पढ़ें. इन दिशानिर्देशों का पालन न करना खतरनाक या गैरकानूनी हो सकता है. अन्य विस्तृत जानकारी इस मैन्युअल में दी गई है.

रेडियो फ्रीक्वेंसी ऊर्जा के संपर्क में आना
रेडियो तरंगों से संपर्क और स्पेसिफिक अब्सॉर्प्शन रेट (SAR) की जानकारी.

आपके फोन मॉडल GB210 को रेडियो तरंगों के संपर्क में आने के लिए लागू सुरक्षा आवश्यकताओं के अनुरूप बनाया गया है. यह आवश्यकता वैज्ञानिक निर्देशों पर आधारित है जिसमें सभी आयु वर्ग और हर प्रकार के स्वास्थ्य के लोगों की सुरक्षा तय करने के लिए बनाए गए सेफ्टी मार्जिन शामिल हैं.

- रेडियो तरंग संपर्क दिशानिर्देश विशिष्ट अवशोषण दर, या SAR के रूप में पहचाने जाने वाली मापन इकाई का उपयोग करते हैं. एसएआर के परीक्षण, सभी उपयोग होने वाले फ्रीक्वेंसी बैंड्स में फोन के उच्चतम प्रमाणित क्षमता स्तर पर फोन संप्रेषण वाली मानकीकृत पद्धतियों का उपयोग करके किए जाते हैं.

- वैसे तो कई LG फोन मॉडल के SAR स्तर में भिन्नता हो सकती है, किंतु उन सभी को रेडियो तरंगों से संपर्क के लिए संबद्ध दिशानिर्देशों को पूरा करने के लिए बनाया गया है.
- नॉन-आयोनाइजिंग रेडिएशन प्रोटेक्शन (ICNIRP) के लिए अंतर्राष्ट्रीय आयोग द्वारा अनुशंसित एसएआर (SAR) सीमा 10 ग्राम टिश्यू पर औसतन 2 W/Kg होती है.
- इस फोन मॉडल के लिए DASY4 द्वारा परीक्षण किया गया उच्चतम एसएआर मान कान के पास 0.972 W/Kg (10g) और शरीर के पास 1.39 W/Kg (10g) है.
- देशों/क्षेत्रों के निवासियों के लिए, जिन्होंने इंस्टीट्यूट ऑफ इलेक्ट्रिकल एंड इलेक्ट्रॉनिक्स इंजीनियर्स (IEEE) द्वारा अनुशंसित एसएआर (SAR) सीमा को स्वीकार किया है, एसएआर डेटा जानकारी एक (1) ग्राम टिश्यू पर औसतन 1.6 W/Kg होती है.

सुरक्षित और प्रभावी उपयोग के दिशानिर्देश

उत्पाद की देखभाल और रख-रखाव

चेतावनी

इस विशेष फ़ोन मॉडल के साथ केवल बताई गई बैटरियाँ, चार्जर और सहायक उपकरण उपयोग करें। इनके किसी भी दूसरे प्रकार का उपयोग फ़ोन पर लागू होने वाले अनुमोदन या वॉरंटी को अमान्य कर सकता है और खतरनाक हो सकता है।

- इस यूनिट को डिसअसेंबल न करें। सुधारने की आवश्यकता होने पर इसे योग्य सेवा तकनीशियन के पास ले जाएँ।
- बिजली के उपकरणों जैसे टीवी, रेडियो और पर्सनल कंप्यूटर से दूर रखें।
- यूनिट को गर्मी के स्रोतों जैसे रेडिएटर्स या कुकर से दूर रखना चाहिए।
- इसे गिराएँ नहीं।
- इसे मैकेनिकल कंपन या झटकों से बचाएँ।
- जिस स्थान पर विशेष नियम के तहत आवश्यक हो, तो वहाँ फ़ोन बंद कर दें। उदाहरण के लिए, अपने फ़ोन का अस्पतालों में उपयोग न करें,

क्योंकि इससे संवेदनशील मेडिकल उपकरण प्रभावित हो सकते हैं।

- चार्ज होते समय फ़ोन को गीले हाथों से न पकड़ें। इससे बिजली का झटका लग सकता है और आपके फ़ोन को गंभीर रूप से क्षति हो सकती है।
- हैंडसेट को ज्वलनशील सामग्री के पास चार्ज न करें, क्योंकि हैंडसेट गर्म होकर आग का कारण बन सकता है।
- फ़ोन को बाहर से साफ करने के लिए सूखे कपड़े का उपयोग करें। (बेंजीन, थीनर अथवा अल्कोहल जैसे विलायकों का उपयोग न करें।)
- फ़ोन को मुलायम फर्नीचर पर चार्ज न करें।
- फ़ोन अच्छे हवादार क्षेत्र में चार्ज किया जाना चाहिए।
- इस यूनिट को अत्यधिक धुएँ या धूल में न रखें।
- फ़ोन को क्रेडिट कार्ड, फ़ोन या ट्रांसपोर्ट टिकट्स के पास न रखें; यह चुंबकीय पट्टियों की जानकारी को प्रभावित कर सकता है।
- स्क्रीन को नुकीली वस्तु से न बाँधें; अन्यथा यह फ़ोन को नुकसान पहुँचा सकता है।

सुरक्षित और प्रभावी उपयोग के दिशानिर्देश

- फ़ोन को तरल या नमी में न रखें.
- इयरफ़ोन जैसी सहायक वस्तुओं का उपयोग सावधानीपूर्वक करें. अनावश्यक रूप से एन्टीना न दबाएँ.

प्रभावी ढंग से फ़ोन का उपयोग इलेक्ट्रॉनिक्स डिवाइस

- बिना अनुमति के अपने मोबाइल फ़ोन का उपयोग मेडिकल उपकरण के पास न करें. फ़ोन को पेसमेकर के पास अर्थात अपनी शर्ट की ऊपरी जेब में न रखें.
- मोबाइल फ़ोन द्वारा कुछ श्रवण सुविधाएँ बाधित हो सकती हैं.
- छोटे व्यवधान टीवी, रेडियो, पीसी इत्यादि को प्रभावित कर सकते हैं.

सड़क सुरक्षा

जिन क्षेत्रों में आप गाड़ी चलाते हैं, वहाँ मोबाइल फ़ोन के उपयोग से संबंधित कानूनों और नियमों की जानकारी ले लें.

- गाड़ी चलाते समय हैंड-हेल्ड फ़ोन का उपयोग न करें.

- गाड़ी चलाने पर पूरा ध्यान दें.
- यदि उपलब्ध हो, तो हैंड्स-फ्री किट का उपयोग करें.
- यदि वाहन चलाते समय आवश्यक हो, तो कॉल करने या उत्तर देने से पहले वाहन को सड़क के किनारे लगाएँ.
- आरएफ ऊर्जा आपके वाहन के कुछ इलेक्ट्रॉनिक सिस्टम्स जैसे कार स्टीरियो और सुरक्षा उपकरण को प्रभावित कर सकती है.
- जब आपके वाहन में एयर बैग की सुविधा हो, तो लगे हुए या पोर्टेबल वायरलेस उपकरण से व्यवधान न डालें. यह अनुपयुक्त कार्य के कारण विफल हो सकता है अथवा गंभीर चोट पहुँचा सकता है.
- यदि आप यात्रा के समय संगीत सुन रहे हैं, तो कृपया सुनिश्चित करें कि वॉल्यूम उचित स्तर पर रहे जिससे आप अपने चारों ओर के वातावरण के प्रति सचेत रहें. यह तब विशेष रूप से जरूरी है जब आप रास्ते में हों.

सुरक्षित और प्रभावी उपयोग के दिशानिर्देश

अपने सुनने की क्षमता को नुकसान न पहुँचाएँ

यदि आप बहुत समय तक तेज ध्वनि सुनते हैं तो आपकी सुनने की क्षमता को क्षति पहुँच सकती है. इसलिए हम सलाह देते हैं कि आप अपना हैंडसेट कान के पास चालू या बंद न करें. हम इसकी भी सलाह देते हैं कि संगीत और कॉल वॉल्यूम उचित स्तर पर सेट हों.

विस्फोटक क्षेत्र

फ़ोन का उपयोग ऐसे स्थान पर न करें जहाँ विस्फोट हो रहे हों. प्रतिबंधों पर ध्यान दें और कानून व नियमों का पालन करें.

संभावित रूप से विस्फोट वाले वातावरण

- फ़ोन का उपयोग ईंधन भरने के स्थान पर न करें.
- ईंधन अथवा रसायनों के नजदीक इसका उपयोग न करें.
- ज्वलनशील गैस, तरल पदार्थ, अथवा विस्फोटकों को अपने वाहन में जहाँ आपका मोबाइल फ़ोन और सहायक वस्तुएँ रखी हैं, वहाँ न रखें.

एयरक्रॉफ़्ट में

वायरलेस डिवाइस से एयरक्रॉफ़्ट में बाधा उत्पन्न हो सकती है.

- किसी एयरक्राफ़्ट में जाने से पहले अपना मोबाइल फ़ोन बंद कर दें.
- क्रू की अनुमति के बिना इसे जमीन पर उपयोग न करें.

बच्चे

फ़ोन को बच्चों की पहुँच से दूर किसी सुरक्षित स्थान पर रखें. इसमें ऐसे कई भाग होते हैं, जिन्हें हटाने पर श्वासरोधन होने का खतरा हो सकता है.

आपातकालीन कॉल्स

आपातकालीन कॉल्स सभी मोबाइल नेटवर्क्स के तहत उपलब्ध नहीं हो सकते. इसलिए, आपको आपातकालीन कॉल्स के लिए केवल फ़ोन पर ही निर्भर नहीं रहना चाहिए. अपने स्थानीय सेवा प्रदाता से इसकी जानकारी लें.

सुरक्षित और प्रभावी उपयोग के दिशानिर्देश

बैटरी जानकारी और देखभाल

- बैटरी रिचार्ज करने के पहले आपको उसे पूरी तरह डिस्चार्ज करने की आवश्यकता नहीं है। अन्य बैटरी सिस्टम्स के विपरीत, ऐसा कोई प्रभाव नहीं है जिससे बैटरी के प्रदर्शन पर असर पड़ता है।
- केवल LG बैटरीज और चार्जर्स का उपयोग करें। LG के चार्जर्स बैटरी का जीवन बढ़ाने के लिए बने होते हैं।
- बैटरी पैक को अलग-अलग न करें या उसे शॉर्ट-सर्किट से बचाएँ।
- बैटरी पैक के धातु वाले हिस्सों को साफ रखें।
- बैटरी का प्रदर्शन अपेक्षाकृत न रहने पर उसे बदल दें। बैटरी पैक को सैकड़ों बार रीचार्ज किया जा सकता है, जब तक कि उसे बदलने की आवश्यकता न हो।
- यदि बैटरी को लंबे समय से उपयोग नहीं किया गया है तो उसकी क्षमता बढ़ाने के लिए उसे रीचार्ज करें।
- बैटरी चार्जर को सीधी धूप में न रखें या अधिक नमी वाली जगहों पर जैसे कि बाथरूम में इसका उपयोग न करें।
- बैटरी को गर्म या ठंडे स्थानों पर न रखें, इससे बैटरी के प्रदर्शन पर बुरा असर हो सकता है।
- यदि बैटरी को किसी गलत प्रकार की बैटरी से बदला जाता है तो विस्फोट का खतरा होता है।
- उपयोग की गई बैटरीज का निपटान निर्माता के निर्देशों के अनुसार ही करें। जब भी संभव हो इसे रीसायकल करें। इसे घरेलू कचरे की तरह न फेंकें।
- यदि आप बैटरी बदलना चाहते हैं तो सहायता के लिए इसे नजदीक के अधिकृत LG इलेक्ट्रॉनिक्स सेवा केन्द्र या डीलर के पास ले जाएँ।
- फ़ोन पूरी तरह चार्ज हो जाने पर चार्जर को वॉल सॉकेट से निकाल दें ताकि चार्जर के अनावश्यक ऊर्जा खपत को बचाया जा सके।
- बैटरी का वास्तविक जीवन नेटवर्क कॉन्फिगरेशन, उत्पाद सेटिंग्स, उपयोग प्रतिमान, बैटरी और वातावरण की परिस्थितियों पर निर्भर करेगा।

तकनीकी डेटा

सामान्य

उत्पाद नाम : GB210

सिस्टम : E-GSM 900 / DCS 1800

परिवेश का तापमान

अधिकतम : +55°C (डिस्चार्जिंग)

+45°C (चार्जिंग)

न्यूनतम : -10°C

ब्लूटूथ QD ID B014921

Declaration of Conformity



Suppliers Details

Name

LG Electronics Inc

Address

LG Electronics Inc. LG Twin Towers 20,
Yeouido-dong, Yeongdeungpo-gu, Seoul, Korea 150-721

Product Details

Product Name

E-GSM 900 / DCS 1800 Dual band Terminal Equipment

Model Name

GB210

Trade Name

LG

CE 0168

Applicable Standards Details

R&TTE Directive 1999/5/EC

EN 301 489-01 V1.6.1, EN 301 489-07 V1.3.1, EN 301 489-17 V1.2.1
EN 301 511 V9.0.2
EN 50360/EN 50361:2001
EN 60950-1:2001
EN300328 V1.7.1

Supplementary Information

The conformity to above standards is verified by the following Notified Body(BABT)

BABT, Balfour House, Churchfield Road, Walton-on-Thames, Surrey, KT12 2TD, United Kingdom
Notified Body Identification Number : 0168

Declaration

I hereby declare under our sole responsibility
that the product mentioned above to which this
declaration relates complies with the above mentioned
standards and Directives

European Standard Center
LG Electronics Logistics and Services B.V.
Veluwezoom 15, 1327 AE Almere, The Netherlands
Tel : +31 - 36- 547 - 8940, Fax : +31 - 36 - 547 - 8794
e-mail : jacob @ lge.com

Name

Seung Hyoun, Ji / Director

Issued Date

6. Jan . 2009

Signature of representative


GB210 User Guide - English


This guide will help you understand your new mobile phone. It will provide you with useful explanations of features on your phone.

Some of the contents in this manual may differ from your phone depending on the software of the phone or your service provider.



Getting to know your phone

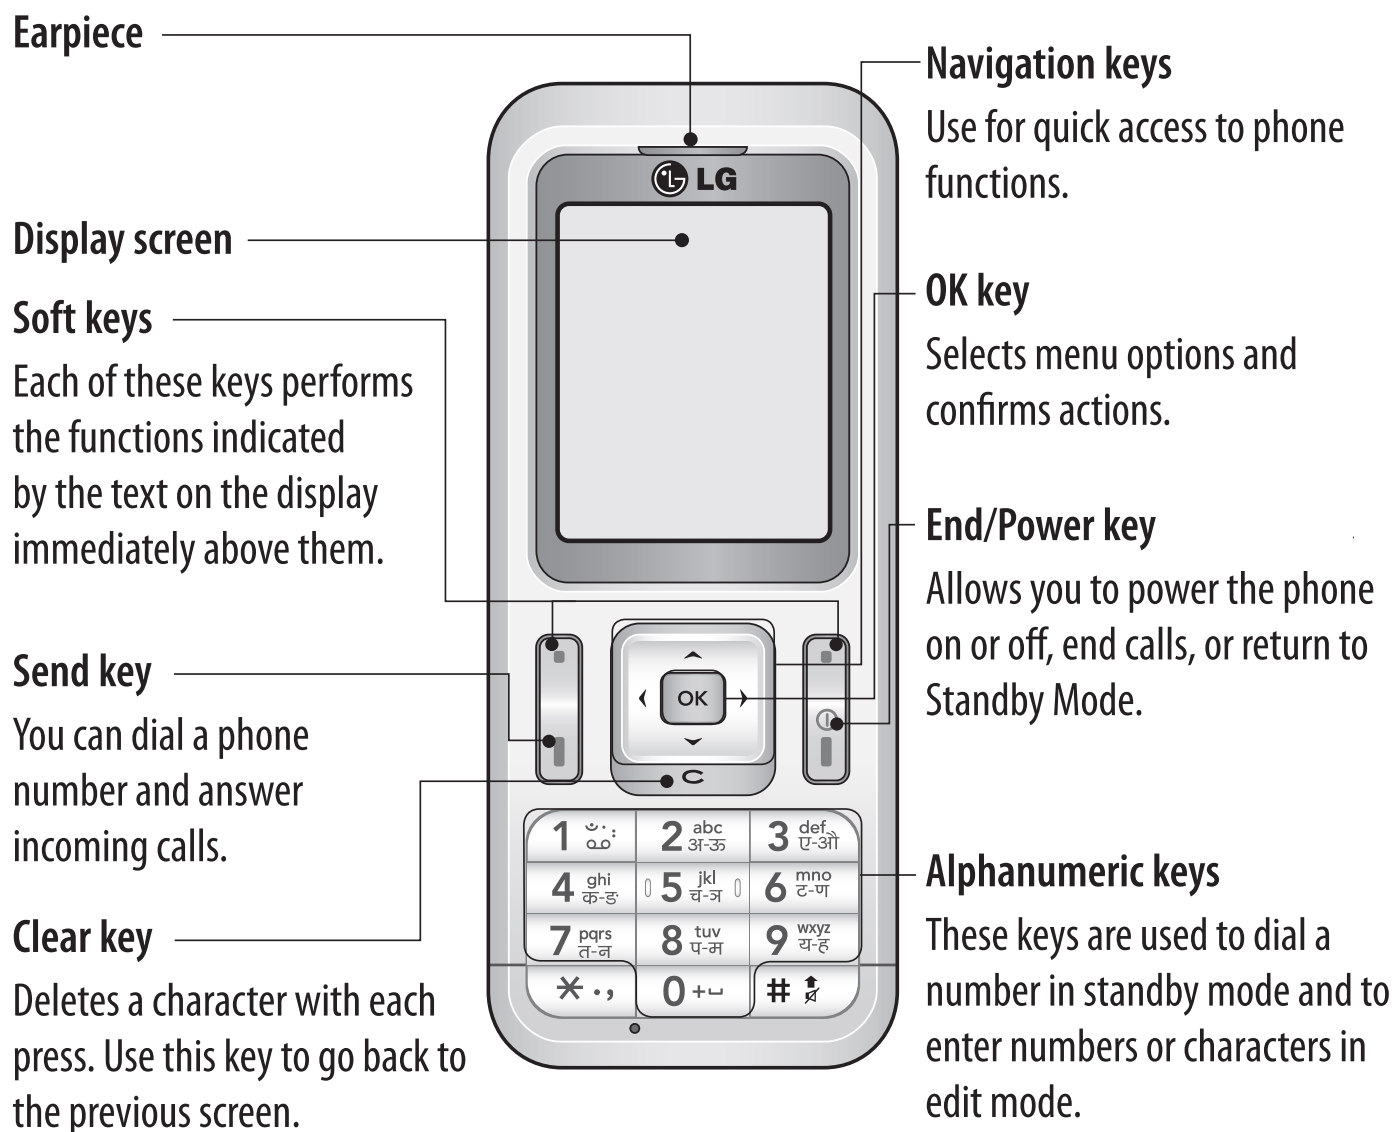

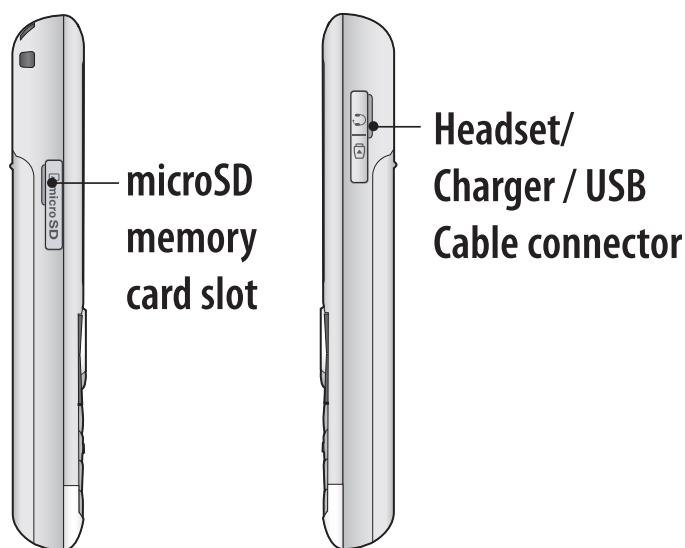

Note: Auto key lock

To prevent unintended operation of your phone, the keypad protection function is automatically enabled.


To disable keypad protection, press the left soft key **Unlock** and then press the right soft key **Yes**.

If you want to change the setting of this function, press **Menu > Settings > Security**, and choose **Auto key lock**. Select **Off** or set the amount of time before Auto key locks.

Installing a memory card

Lift the memory card cover and insert a micro SD card with the golden contact area facing downwards. Close the memory card cover so that it clicks shut.

To remove a memory card, gently push it as shown in the diagram.

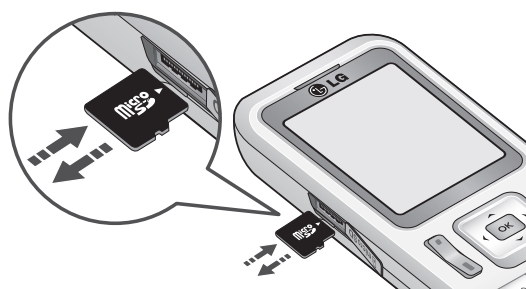

Note: A memory card is an optional accessory.

Formatting the memory card

Press **Menu** and select **Settings**.

Choose **Memory status**, select **External memory** and press **Format**.

WARNING: When you format your memory card, all the content will be wiped. If you do not want to lose the data on your memory card, back it up first.

Installing the SIM Card and Charging the Battery


Installing the SIM Card

When you subscribe to a cellular network, you are provided with a plug-in SIM card loaded with your subscription details, such as your PIN, any optional services available and many others.

Important! › The plug-in SIM card and its contacts can be easily damaged by scratches or bending, so be careful when handling, inserting or removing the card. Keep all SIM cards out of the reach of small children.

Illustrations

- 1 Open battery cover
- 2 Remove the battery
- 3 Insert your SIM
- 4 Insert the battery
- 5 Close the battery cover
- 6 Charge your battery

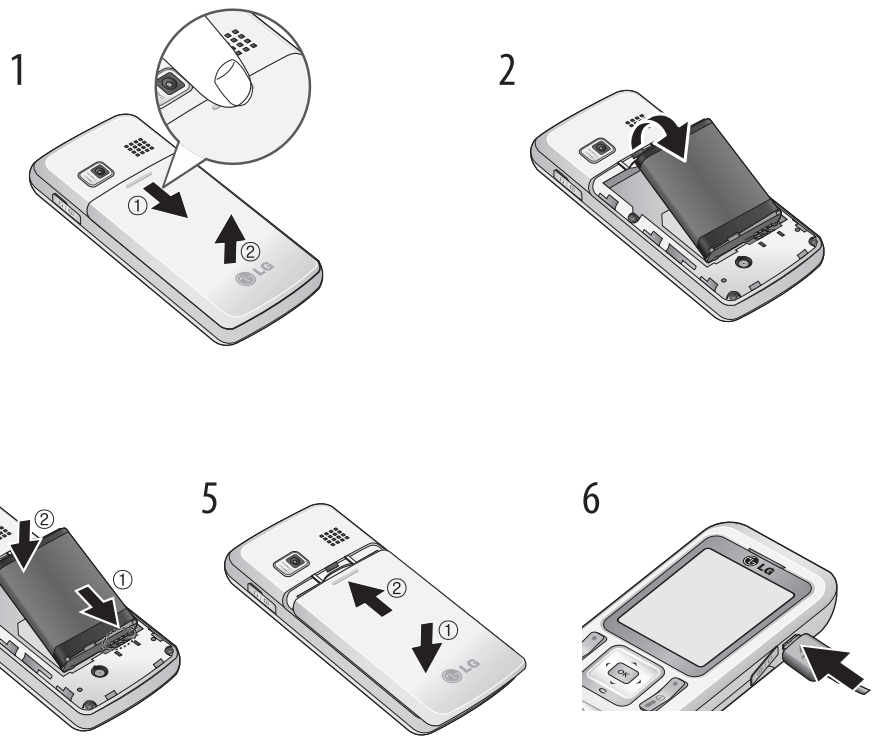

WARNING: Do not remove the battery when the phone is switched on, as this may damage the phone.

Menu map



Games & Apps

- 1 Games
- 2 Applications
- 3 Network profiles



Call history

- 1 All calls
- 2 Missed calls
- 3 Dialed calls
- 4 Received calls
- 5 Call duration
- 6 Call costs
- 7 Data information



Organizer

- 1 Calendar
- 2 Memo
- 3 To do



Multimedia

- 1 MP3 player
- 2 Camera
- 3 Video camera
- 4 FM radio
- 5 Voice recorder



Messaging

- 1 New message
- 2 Inbox
- 3 Bluetooth box
- 4 Drafts
- 5 Outbox
- 6 Sent
- 7 Listen to voicemail
- 8 Info messages
- 9 Templates
- 0 Settings



My stuff

- 1 Images
- 2 Sounds
- 3 Videos
- 4 Others
- 5 External memory



Profiles

- 1 General
- 2 Silent
- 3 Vibrate only
- 4 Outdoor
- 5 Headset



Contacts

- 1 Search
- 2 New contact
- 3 Speed dial
- 4 Groups
- 5 Copy all
- 6 Delete all
- 7 Settings
- 8 Information



Tools

- 1 Alarm clock
- 2 Calculator
- 3 Stopwatch
- 4 Unit converter
- 5 World clock
- 6 SIM services*
- * This feature depends on SIM and the network services.



Browser

- 1 Home
- 2 Google Search
- 3 Bookmarks
- 4 Enter address
- 5 History
- 6 Saved pages
- 7 Settings
- 8 Information



Connectivity

- 1 Bluetooth
- 2 Network
- 3 USB connection



Settings

- 1 Date & Time
- 2 Languages
- 3 Display
- 4 Shortcut
- 5 Call
- 6 Security
- 7 Flight mode
- 8 Power save
- 9 Reset
- 0 Memory status

Calls

Making a call

- 1 Key in the number using the keypad. To delete a digit press .
- 2 Press Send key to initiate the call.
- 3 To end the call, press End key.

TIP! To enter + when making an international call, press and hold 0.

TIP! To adjust the volume during a call, use  and .

Making a call from your contacts

- 1 Press  to open the address book.
- 2 Using the keypad, enter the first letter of the contact you want to call. For example, for Office, press 6 three times.
- 3 To scroll through the contacts and their different numbers use  and .
- 4 Press Send key to initiate the call.

Answering and rejecting a call

When your phone rings, press **Accept** or press Send key to answer the call.

While your phone is ringing, select **Silent** to mute the ringing. This is great if you have forgotten to change your profile to **Silent** for a meeting.

Press End key or **Reject** to reject the incoming call.

Note: The rejected call will appear under Missed Call list.

Using the speakerphone

During a call, you can activate speakerphone by pressing OK key and you can use the handset in hands-free.

If the speakerphone is active, press OK key again to resume normal handset conversation mode.

Viewing your call logs

You can check the record of missed, received, and dialled calls only if the network supports the Calling Line Identification (CLI) within the service area. The number or name (if available) is displayed with the date and time at which the call was made You can also

view call durations. Press **Menu**, select **Call history**.

Changing the call settings

You can set the menu relevant to a call. Press **Menu**, select **Settings** and choose **Call**.

- **Call divert** - Choose whether to divert your calls.
- **Call barring** – Select when you would like calls to be barred.
- **Fixed dial number** – Choose a list of numbers that can be called from your phone. You'll need your PIN2 code from your operator. Only numbers included in the fixed dial list can be called from your phone.
- **Answer mode** - Choose whether to answer the phone using any key or send key only.
- **Send my number** - Choose whether your number will be displayed when you call someone. (Depends on your network provider.)
- **Call waiting** - Be alerted when you have a call waiting. (Depends on your network provider.)

- **Minute minder** - Select **On** to hear a tone every minute during a call.
- **Auto redial** - Choose **On** or **Off**.
- **Send DTMF tones** - Choose **On** or **Off**.

Contacts

Searching for a contact

- 1 Press **Contacts** and choose **Search**, select **Contacts** from the **Menu** screen or press  from the standby screen.
- 2 Using the keypad enter the first letter of the contact you want to call. For example, for Office, press 6 three times. Then press **Search**.
- 3 To scroll through the contacts and their different numbers use  and .

TIP! There are two LG Mobile customer care numbers provided in phone book. You can directly call the LG Customer Care I or edit LG Customer Care II with area code and make the call.

Adding a new contact

- 1 Press **Contacts** and choose **New contact**.
- 2 Choose whether to store your new contact on your **Phone** or **SIM** card.
- 3 Enter all the information you have in the fields provided and select **Save**.

Note: When you are storing a contact's email address, press  to enter a symbol and scroll with  and  until you see @.

Messaging

Your GB210 includes functions related to SMS (Short Message Service), MMS (Multimedia Message Service) and Bluetooth, as well as the network's service messages.

Sending a message

- 1 Press **Menu**, select **Messaging** and choose **New message**.
- 2 Choose **Message** to send an SMS or MMS.
- 3 A new message editor will open. Message editor combines SMS and MMS into one intuitive and easy to switch between SMS

mode and MMS mode. The default setting of the message editor is SMS mode.

- 4 Enter your message using either the T9 predictive mode or Abc manual mode. You can switch text input mode by pressing .
- 5 Press **Options** and choose **Insert** to add an **Image, Sound, Video, Symbol, Text template, Emoticon, Name & Number, New slide, Subject** or **More (Contact/My business card/Schedule/Memo/To do)**.
- 6 Press **Options** and choose **Send to**.
- 7 Enter the phone number or press **Options** and select **Contacts** or **Recent list** to open your contacts list. You can add multiple contacts.
- 8 Press OK key.

TIP! You can select your message type as SMS or MMS when you enter a text longer than 1 page in the message field. If you want to change the type of message to send, press **Menu > Messaging > Settings > Text message**, and choose **Send long text as**.

WARNING: If an Image, Sound, Video, New slide or Subject is added to the message editor, it will be automatically converted to MMS mode and you will be charged accordingly.

Note: You can send SMS to many users at a time. Option **Send to Many** will open the contacts list where in user can mark/unmark contacts for sending message. First 100 contacts marked will be chosen if **Mark all** is selected. To send the SMS to a particular group of contacts select the option **Send to Group** after composing the SMS.

Bluetooth message

To send/receive the message via Bluetooth, you should switch on the Bluetooth.

Bluetooth box

All messages you receive via Bluetooth are placed into your Bluetooth Inbox. Here you can read, reply to and forward your messages.

Entering text

You can enter alphanumeric characters using the phone's keypad. The following text

input methods are available in the phone: T9 predictive mode, ABC manual mode and 123 mode.

Note: Some fields may allow only one text input mode (e.g. telephone number in address book fields).

T9 predictive mode

T9 predictive mode uses a built-in dictionary to recognise words you're writing based on the key sequences you press. Simply press the number key associated with the letter you want to enter, and the dictionary will recognise the word once all the letters are entered.

ABC manual mode

This mode allows you to enter letters by pressing the key labeled with the required letter once, twice, three or four times until the letter is displayed.

123 mode

Type numbers using one keystroke per number. You can also add numbers while

remaining in letter modes by pressing and holding the desired key.

MP3 player

Your GB210 has a built-in MP3 player so you can play all your favourite music.

Playing a song

- 1 Press **Menu** and select **Multimedia**, then choose **MP3 player**.
- 2 Choose **All songs** then select the song you want to play. Press OK (▶) key.
- 3 While music is playing, press OK key to pause the song.
- 4 Press ▶▶ to skip to the next song.
- 5 Press ◀◀ to skip to the previous song.
- 6 While music is playing, press OK key and select  to stop the music and return to the MP3 player menu.

TIP! To change the volume while listening to music, use  and .

TIP! When an MP3 track is playing on the MP3 player, if you press , you can use BGM mode. In BGM (Background Music) mode, MP3 can be played while other functions are being used. BGM can be stopped on the MP3 player screen.

Camera

Taking a quick photo

Using the camera module built in your phone, you can take pictures of people. Additionally, you can send photos to other people and select photos as wallpaper.

- 1 Press **Menu** and select **Multimedia**, select **Camera** to open the viewfinder.
- 2 Holding the phone vertically, point the lens towards the subject of the photo.
- 3 Press OK key to take a photo.

Video camera

Shooting a quick video

You can record and save a video clip.

- 1 Press **Menu** and select **Multimedia**, scroll down and select **Video camera** to open the viewfinder.
- 2 Point the camera lens towards the subject of the video.
- 3 Press OK key to start recording.
- 4 **REC** will appear in the viewfinder and a timer will show the length of your video.
- 5 Press **Stop** to stop recording.

FM radio

Your GB210 has an FM radio feature so you can tune into your favourite stations to listen on the move.

Note: You will need to insert your headset in order to listen to the radio. Insert the plug into the headset socket (this is the same socket that you plug your charger into).

Listening to the radio

- 1 Press **Menu** and select **Multimedia**, then choose **FM radio**.
- 2 Select the channel number of the station you would like to listen to.

TIP! To change the volume while listening to the radio, use  and .

TIP! You can listen to the radio via built-in speaker. Press **Options**, select **Listen via** and choose **Speaker**.

TIP! While listening FM Radio through headset, you can change the FM radio channel through short press of headset key. If the handset is in deep sleep mode and keypad is locked, long press of headset key will turn on backlight also simultaneously change the FM radio channel.

Voice recorder

Use your Voice recorder to record voice memos or other sounds.

Recording your voice memo

- 1 Press **Menu** and select **Multimedia**, then choose **Voice recorder**.
- 2 Press OK key to begin recording.
- 3 Choose **Stop** to end the recording.
- 4 Press **Options** and choose **Play** to listen to the voice memo.

TIP! You can listen to all of the voice recordings you have saved by selecting **Options** and **Album**.

My stuff

You can store any multimedia files into your phone's memory so that you have easy access to all of your images, sounds, videos, others and games. You can also save your files to a memory card. The advantage of using a memory card is that you can free up space on your phone's memory. All your multimedia files will be saved in **My stuff**. Press **Menu** then select **My stuff** to open a list of folders.

Games and Apps

Your GB210 comes with preloaded games to keep you amused when you have time to spare. If you choose to download any additional games or applications they will be saved into this folder. Press **Menu** and select **Games & Apps**.

GB210 also comes with preloaded applications.

- **Data Wallet** - This application is used to keep personal informations. (Bank Account / Credit Card / Loan / Email ID details)
- **LG Help Desk** - This application has all India LG Mobile service centre / Call Centre numbers directory.

Organizer / Tools

Using the calendar

(**Menu > Organizer > Calendar**)

When you enter this menu, a calendar appears. A square cursor is located on the current date. You can move the cursor to another date using the navigation keys.

Adding a memo

(**Menu > Organizer > Memo**)

You can register your own memos here.

Adding an item to your to do list

(**Menu > Organizer > To do**)

You can view, edit and add tasks to do.

Setting your alarm

(Menu > Tools > Alarm clock)

You can set up to 5 alarm clocks to go off at a specified time.

Using your calculator

(Menu > Tools > Calculator)

The calculator provides the basic arithmetic functions: addition, subtraction, multiplication and division.

Using the stopwatch

(Menu > Tools > Stopwatch)

This option allows you to use the function of a stopwatch.

Converting a unit

(Menu > Tools > Unit converter)

This converts many measurements into a unit you want.

Adding a city to your world clock

(Menu > Tools > World clock)

You can add a required city to the list of world clock. You can also check the current time of

Greenwich Mean Time (GMT) and major cities around the world.

SIM services

(Menu > Tools > SIM services)

This feature depends on SIM and the network services. In case the SIM card supports SAT (i.e. SIM Application Toolkit) services, this menu will be the operator specific service name stored on the SIM card.

Browser

Accessing the browser

You can launch the wap browser and access the homepage of the activated profile on browser settings. You can also manually enter an URL address and access the associated wap page.

- 1 Press **Menu** and select **Browser**.
- 2 To access the browser homepage directly, select **Home**. Alternately, select **Enter address** and type in your desired URL.

Note: An additional cost is incurred when connecting to this service and downloading content. Check your data charges with your network provider.

Google Search

You can access Google Mobile Internet Service. To access Google Search services, press **Menu** and select **Browser** then **Google Search**.

Note: This is dependent on Network Services. You may be unable to access **Google Search** in some countries.

Connectivity

Changing your connectivity settings (**Menu** > **Connectivity**)

Your connectivity settings have already been set up by your network operator, so you can enjoy your new phone from switch on. If you want to change any settings, use this menu. You can configure the network setting and data access profiles in this menu.

- **Bluetooth** - Setup your GB210 for Bluetooth® use. You can adapt your visibility to other devices or search through devices your phone is paired with.
- **Network** - Your GB210 connects automatically to your preferred network. To change these settings use this menu. You can also add new access points using this menu.
- **USB connection** - Choose **Data service** and synchronise your GB210 using the LG PC Suite software to copy files from your phone. If you have a memory card inserted, select **Mass storage** to use your phone in the same way as you would use a USB stick. Connect to your computer and drag and drop files to the GB210 removable device folder.

Note: To use the USB mass storage function, you will need to insert an external memory card in your phone.

Changing your Bluetooth settings

- 1 Press **Menu** and select **Connectivity**.
Choose **Bluetooth**.
- 2 Choose **Bluetooth settings**. Make your changes to:
 - **My visibility** - Choose whether to **Show** or **Hide** your device to others.
 - **My name** - Enter a name for your LG GB210.
 - **My address** - View your Bluetooth address.
 - **Primary storage** - Choose the default location you prefer items to be saved to.

Note: To use the primary storage function, you will need to insert an external memory card in your phone.

Pairing with another Bluetooth device

By pairing your GB210 and another device, you can set up a passcode protected connection. This means your pairing is more secure.

- 1 Check your Bluetooth is **On** and **Visible**.
You can change your visibility in the **Bluetooth settings** menu, by selecting **My visibility**, then **Show**.

- 2 Select **Device list** from the **Bluetooth** menu and choose **New**.
- 3 Your GB210 will search for devices. When the search is completed **Pair** and **Refresh** will appear on screen.
- 4 Choose the device you want to pair with, select **Pair** and enter the passcode then choose OK key.
- 5 Your phone will then connect to the other device, on which you should enter the same passcode.
- 6 Your passcode protected Bluetooth connection is now ready.

Profiles

Changing your profiles

(Menu > Profiles)

You can quickly change your profile from the standby screen. Simply press  then choose the profile you would like to activate. Choose from **General**, **Silent**, **Vibrate only**, **Outdoor** and **Headset**.

Settings

Changing your date & time

(Menu > Settings > Date & Time)

You can set functions relating to the date and time.

Changing the language

(Menu > Settings > Languages)

You can change the language for the display texts in your phone. This change will also affect the language input mode.

Changing your display settings

(Menu > Settings > Display)

You can change the settings for the phone display.

Changing your shortcuts settings

(Menu > Settings > Shortcuts)

You can change the shortcuts of 4 navigation keys.

Changing your security settings

(Menu > Settings > Security)

Change your security settings to keep your GB210 and the important information it holds protected.

- **PIN code request** - Choose a PIN code to be requested when you turn your phone on.
- **Auto key lock** - If you activate this function, the key will be locked automatically in standby mode without requesting the action of key.
- **Phone lock** - Choose a security code to lock your phone, **When power on, When SIM changed or Immediately.**
- **Application lock** - You can set the application lock to avoid unauthorized use of Images in phone memory, Calendar, Memo and To do. You will need a security code.
- **Anti Theft Mobile Tracker** - When the handset is stolen, handset sends the SMS to the numbers configured by real owner. To activate the ATMT feature, you will need

to set ATMT on, and configure the ATMT settings with name, primary number and secondary number. Default ATMT code is "0000."

ATMT SMS will contain information about the stolen phone IMEI, current location (captured as per Cell Broadcast message) & number of the person who is using that handset.

- **Change codes** - Change your **Security code**, **PIN code** (This menu item will appear if PIN code request is set to On), **PIN2 code** or **ATMT code**.

Using flight mode

(**Menu > Settings > Flight mode**)

Use this function to switch the flight mode On or Off. You will not be able to make calls, connect to the Internet, send messages when Flight mode is switched On.

Note: Bluetooth can be turned On in Flight mode by manually selecting the option.

Power save

(**Menu > Settings > Power save**)

If you set Always on, you can save the battery power. Choose to switch the power save settings **Always on**, **Night only** or **Off**.

Resetting your phone

(**Menu > Settings > Reset**)

Use **Reset** to reset all the settings to their factory definitions. You need the security code to activate this function. The default number is "0000".

Viewing memory status

(**Menu > Settings > Memory status**)

Your GB210 has three memories available: the phone, the SIM card and an external memory card (you may need to purchase the memory card separately). You can use the memory manager to determine how each memory is used and see how much space is available.

Guidelines for safe and efficient use

Please read these simple guidelines. Not following these guidelines may be dangerous or illegal.

Exposure to radio frequency energy Radio wave exposure and Specific Absorption Rate (SAR) information

This mobile phone model GB210 has been designed to comply with applicable safety requirements for exposure to radio waves. These requirements are based on scientific guidelines that include safety margins designed to assure the safety of all persons, regardless of age and health.

- The radio wave exposure guidelines employ a unit of measurement known as the Specific Absorption Rate, or SAR. Tests for SAR are conducted using standardised methods with the phone transmitting at its highest certified power level in all used frequency bands.

- While there may be differences between the SAR levels of various LG phone models, they are all designed to meet the relevant guidelines for exposure to radio waves.
- The SAR limit recommended by the International Commission on Non-Ionizing Radiation Protection (ICNIRP) is 2W/kg averaged over 10g of tissue.
- The highest SAR value for this model phone tested by DASY4 for use at the ear is 0.972 W/kg (10g) and when worn on the body is 1.39 W/Kg(10g).
- SAR data information for residents in countries/regions that have adopted the SAR limit recommended by the Institute of Electrical and Electronics Engineers (IEEE), which is 1.6 W/kg averaged over 1g of tissue.

Guidelines for safe and efficient use (Continued)

Product care and maintenance

WARNING

Only use batteries, chargers and accessories approved for use with this particular phone model. The use of any other types may invalidate any approval or warranty applying to the phone, and may be dangerous.

- Do not disassemble this unit. Take it to a qualified service technician when repair work is required.
- Keep away from electrical appliances such as TVs, radios, and personal computers.
- The unit should be kept away from heat sources such as radiators or cookers.
- Do not drop.
- Do not subject this unit to mechanical vibration or shock.
- Switch off the phone in any area where you are required by special regulations. For example, do not use your phone in hospitals as it may affect sensitive medical equipment.
- Do not handle the phone with wet hands while it is being charged. It may cause an electric shock and can seriously damage your phone.
- Do not charge a handset near flammable material as the handset can become hot and create a fire hazard.
- Use a dry cloth to clean the exterior of the unit (do not use solvents such as benzene, thinner or alcohol).
- Do not charge the phone when it is on soft furnishings.
- The phone should be charged in a well ventilated area.
- Do not subject this unit to excessive smoke or dust.
- Do not keep the phone next to credit cards or transport tickets; it can affect the information on the magnetic strips.
- Do not tap the screen with a sharp object as it may damage the phone.

Guidelines for safe and efficient use (Continued)

- Do not expose the phone to liquid or moisture.
- Use the accessories like earphones cautiously. Do not touch the antenna unnecessarily.

Efficient phone operation

Electronics devices

- Do not use your mobile phone near medical equipment without requesting permission. Avoid placing the phone over pacemakers, i.e. in your breast pocket.
- Some hearing aids might be disturbed by mobile phones.
- Minor interference may affect TVs, radios, PCs, etc.

Road safety

Check the laws and regulations on the use of mobile phones in the area when you drive.

- Do not use a hand-held phone while driving.

- Give full attention to driving.
- Use a hands-free kit, if available.
- Pull off the road and park before making or answering a call if driving conditions so require.
- RF energy may affect some electronic systems in your vehicle such as car stereos and safety equipment.
- When your vehicle is equipped with an air bag, do not obstruct with installed or portable wireless equipment. It can cause the air bag to fail or cause serious injury due to improper performance.
- If you are listening to music whilst out and about, please ensure that the volume is at a reasonable level so that you are aware of your surroundings. This is particularly imperative when near roads.

Guidelines for safe and efficient use (Continued)

Avoid damage to your hearing

Damage to your hearing can occur if you are exposed to loud sound for long periods of time. We therefore recommend that you do not turn on or off the handset close to your ear. We also recommend that music and call volumes are set to a reasonable level.

Blasting area

Do not use the phone where blasting is in progress. Observe restrictions, and follow any regulations or rules.

Potentially explosive atmospheres

- Do not use the phone at a refueling point.
- Do not use near fuel or chemicals.
- Do not transport or store flammable gas, liquid, or explosives in the same compartment of your vehicle as your mobile phone and accessories.

In aircraft

Wireless devices can cause interference in aircraft.

- Turn your mobile phone off before boarding any aircraft.
- Do not use it on the ground without permission from the crew.

Children

Keep the phone in a safe place out of the reach of small children.

It includes small parts which may cause a choking hazard if detached.

Emergency calls

Emergency calls may not be available under all mobile networks. Therefore, you should never depend solely on the phone for emergency calls. Check with your local service provider.

Guidelines for safe and efficient use (Continued)

Battery information and care

- You do not need to completely discharge the battery before recharging. Unlike other battery systems, there is no memory effect that could compromise the battery's performance.
- Use only LG batteries and chargers. LG chargers are designed to maximize the battery life.
- Do not disassemble or short-circuit the battery pack.
- Keep the metal contacts of the battery pack clean.
- Replace the battery when it no longer provides acceptable performance. The battery pack maybe recharged hundreds of times until it needs replacing.
- Recharge the battery if it has not been used for a long time to maximize usability.
- Do not expose the battery charger to direct sunlight or use it in high humidity, such as in the bathroom.
- Do not leave the battery in hot or cold places, this may deteriorate the battery performance.
- There is risk of explosion if the battery is replaced by an incorrect type.
- Dispose of used batteries according to the manufacturer's instructions. Please recycle when possible. Do not dispose as household waste.
- If you need to replace the battery, take it to the nearest authorized LG Electronics service point or dealer for assistance.
- Always unplug the charger from the wall socket after the phone is fully charged to save unnecessary power consumption of the charger.
- Actual battery life will depend on network configuration, product settings, usage patterns, battery and environmental conditions.

Technical data

General

Product name : GB210

System : E-GSM 900 / DCS 1800

Ambient Temperatures

Max : +55°C (discharging)
+45°C (charging)

Min : -10°C

Bluetooth QD ID B014921

Declaration of Conformity



Suppliers Details

Name

LG Electronics Inc

Address

LG Electronics Inc. LG Twin Towers 20,
Yeouido-dong, Yeongdeungpo-gu, Seoul, Korea 150-721

Product Details

Product Name

E-GSM 900 / DCS 1800 Dual band Terminal Equipment

Model Name

GB210

Trade Name

LG

CE 0168

Applicable Standards Details

R&TTE Directive 1999/5/EC

EN 301 489-01 V1.6.1, EN 301 489-07 V1.3.1, EN 301 489-17 V1.2.1
EN 301 511 V9.0.2
EN 50360/EN 50361:2001
EN 60950-1:2001
EN300328 V1.7.1

Supplementary Information

The conformity to above standards is verified by the following Notified Body(BABT)

BABT, Balfour House, Churchfield Road, Walton-on-Thames, Surrey, KT12 2TD, United Kingdom
Notified Body Identification Number : 0168

Declaration

I hereby declare under our sole responsibility that the product mentioned above to which this declaration relates complies with the above mentioned standards and Directives

Name

Seung Hyoun, Ji / Director

Issued Date

6. Jan . 2009

European Standard Center
LG Electronics Logistics and Services B.V.
Veluwezoom 15, 1327 AE Almere, The Netherlands
Tel : +31 - 36- 547 - 8940, Fax : +31 - 36 - 547 - 8794
e-mail : jacob @ lge.com

Signature of representative

LG Mobile



WARRANTY CARD

This LG handset and charger comes with a 12-month warranty from date of purchase or 15 months from manufacturing date of corresponding IMEI No. Of the unit whichever is earlier, against defect in material or workmanship. In case of a defect, LG Electronics India Pvt. Ltd. undertakes to get the set repaired free of charge through its authorised service centre (ASC) or service dealer subject to following conditions:

Terms and Conditions

1. This warranty is applicable to the first purchase and in no case it can be transferred or extended.
2. Repair of this product will be carried out on a carry in basis to the nearest ASC.
3. While the company will make every effort to carry out repairs at the earliest, it however is made explicitly clear that the company is under no obligation to do so in a specified period of time.
4. The company or its authorised ASC/ service dealer reserves the right to retain any parts of the component/s replaced at its discretion. In the event of a defect being noticed in the equipment during the warranty period.
5. This warranty entitles the purchaser to free of cost repairs of the unit within warranty period and does not entitle for replacement or refund of entire unit. Claims, if any, to this warranty shall in no case exceed the purchase price of the unit.
6. In case of any software upgradation of the phone, no warranty is provided on phone memory or phone book.
7. The warranty is void in case the serial no./ IMEI no. is tampered / disfigured or details in the warranty card are not properly filled up at the time of purchase.
8. This warranty is not valid for damages resulting due to negligence, mishandling, improper use, tampering, breakage, soaking, fire, unauthorised repair and failure due to network upgrades.
9. Batteries are covered under warranty for a period of 6 months from date of purchase or 9 months from date of corresponding IMEI no. of the unit whichever is earlier
10. Warranty does not cover accessories external to the equipment supplied by the dealer.
11. The Delhi / New Delhi courts shall have the jurisdiction to try any dispute and /or suits related to or arising out of this agreement.

Customer Information Center/ Call Center Number

For any query related to the after sales service and customer support please contact us at the numbers listed below.

 LG	SERVICE
	1800-180-9999*
*MTNL / BSNL	39-01-0909**
**Prefix STD Code	

BRANCH ADDRESSES

S. No.	Branch	Branch Office Address	STD Code	Phone No.
1	Ahmedabad	LGEIL, 233-234, Platinum Plaza, Judges Bungalow Road, Bodakdev Road, Ahmedabad - 51	079	40040013 / 14
2	Asansol	LGEIL, Block-E, 1st Floor, P C Chattarjee Market, Rambandhu Tala, GT Road (E) Asansol - 713303	0341	3292009 / 3292010
3	Aurangabad	LGEIL, 302 CIDCO No 3, Opp Hotel Ramgiri, Jalna Road, Aurangabad - 431003	0240	2474055 / 32095436 / 32095437 / 32095438
4	Bangalore	LGEIL, No. 914, 2nd Floor, Shri Venkateshwara Complex, Opp. IBP Petrol Bunk, 80ft Road, 6th Block, Koramangala - Bangalore - 560095	080	41145145 / 41144750 / 41144751 / 30910754 / 30910753
5	Bhopal	13 A Vignes Warehousing Corporation, Sector-G Govindpura Industrial Area J K Road Bhopal	0755	4062900 / 3092938 / 3959804
6	Bhubaneshwar	LGEIL, Plot No.02, 1st Flr., Bapuji Nagar, Bhubaneshwar - 751009	0674	2531430 / 2534280 / 3966525 / 3966526
7	Chandigarh	LGEIL, SCO No. 142-143, 3rd Floor, Sector-34A Chandigarh. - 160002	0172	5087389 / 90 / 5089107 / 3256001 / 3256003
8	Chennai	LGEIL, AA11, 2nd Avenue, Fatima Tower, Anna Nagar West, Chennai - 600040	044	65510501 ~ 04
9	Cochin	LGEIL, 40/1270, Vasudeva Buildings, T.D. Road, Ernakulam Cochin - 682011	0484	2369743 / 2370744 / 2370484 / 4027444 / 4027555
10	Coimbatore	LGEIL, 250a, Sanganur Main Road, Kannappa Nagar, Coimbatore - 641027	0422	2332197 / 2332195 / 2332506 / 3094613 / 3094573
11	Dehradun	LGEIL, M - 22, Mobbewala, Tata Commercial Compound, Dehradun Saharanpur Road, Dehradun	0135	2644213 / 283
12	Delhi	LGEIL, A-27, Mohan Co-operative, Industrial Estate, New Delhi	011	26991411 / 12 / 13
13	Ghaziabad	LGEIL, J-10, RDC Rajnagar Ghaziabad - 201001	0120	9811354152 / 3 / 64 / 65
14	Goa	LGEIL, Plot No-D-3&D-4, Rego Baug, Alto Santacruz, Bambolim, Goa - 403	0832	3294955 / 3294956 / 3294759
15	Gurgaon	LGEIL, II nd Flr, A Block, Centre Point Bldg, Sushant Lok , PH-I, Gurgaon - 122001	0124	4047461 / 62 / 63 / 4272867 / 4047460
16	Guwahati	LGEIL, Shantiner Bhawan, C K Aggarwal Path, Chenikurthi, Guwahati - 781003	0361	2663895 / 2666958 / 2665983 / 2668984
17	Hubli	LGEIL, 603/1B, Ravi Nagar Road, Behind Renuka Petrol Pump, Gokul Road, Hubli - 580030	0836	4250251 / 52 / 2337251 / 52
18	Hyderabad	LGEIL, 1st Floor, Survey No.54, Pulla Reddy Building, Vikarampuri Main Road Kharkhana, Secunderabad - 500004	040	27811732 / 33 / 34
19	Indore	LGEIL, 3rd flr., 304 Bansi Trade Centre, 581/5 M.G.Road, Indore - 452003	0731	4065523 / 24 / 40822157
20	Jaipur	LGEIL, B-71, Sahakar Marg, Lal Kothi Scheme, Jaipur - 302015	0141	51111 18 / 5113028 / 5105392
21	Jalandhar	LGEIL, Village Khajurla, Near Hawali Resturant Jalandhar, Phagwara Highway, G T Road, Jalandhar	01824	502667 / 508025 / 502668
22	Jammu	LGEIL, Plot No.-52, Yard No. 6, Transport Nagar, Narwal, Jammu - 180006	0191	2477420 / 2477419 / 2474396 / 2474384
23	Jodhpur	LGEIL, 22(1-A)/21(2-B)/2, RIICO Heavy Industrial area, Jodhpur - 342003	0291	2742384 / 392
24	Kolkata	LGEIL, 1, Ho-Chi-Min-Sarani, 6th Floor, Metro Towers, Kolkata - 700071	033	22883250 / 51 / 52
25	Kundli	LGEIL, Sunshine Enterprises, Sunder Cold Storage, Gt Karnal Road, Kundli - Sonipat	0130	2219201 / 02 / 03
26	Lucknow	LGEIL, B-537, Hari Kunj, Keshav Nagar, Sitapur Road Lukhnow - 226020	0522	2757538 / 39 / 2759121
27	Ludhiana	LGEIL, Village Jhande, Near Badowal Railway Station, Opp ferozpur Road Ludhiana.	0161	2804413 / 19
28	Mumbai	LGEIL, Trade Star, 4th Floor, A Wing, J.B Nagar, Andheri Kurla Road, Andheri (E) Mumbai - 400059	022	28352882 - 2887
29	Nagpur	LGEIL, 5a, Road No.13, Behind Msrtc Workshop, MIDC Hinga, Nagpur - 440016	07104	235120 / 235122
30	Patna	LGEIL, 2nd Floor, Ankit Chandra Deep Complex, Bander Bageecha, Near Samrat Hotel, Patna - 800001.	0612	3299156
31	Pune	LGEIL, 105/106, Premium Point, GM Road, Opp Modern High School, Illrd Floor, Shivaji Marg. Pune - 411005	020	66030100 / 732
32	Raipur	LGEIL, Nathani Compound, Shyam Nagar, Katora Talab, Raipur (C.G)	0771	4053171 / 4037470 / 4048745
33	Ranchi	LGEIL, 402, Commerce Tower, Opp. Gel Church Complex, Main Road, Ranchi	0651	3294026 / 2331815 / 3090426
34	Surat	LGEIL, 1001-1004, Ascon Plaza, IInd Flr, Anand Mahal Road, Behind Bhulka Bhavan School, Adajan, Surat - 395009	0261	2730982 / 83 / 84
35	Thane	LGEIL, Gall Shop No - 206, 207, 2nd Floor, Sai Plaza , Above Vijay Sales Opp. Cine Wonder Mall, Ghodbunder Road, Thane(West) - 400607	022	25472633 / 2637
36	Varanasi	LGEIL, Pama Complex, DLW, Lahartara Road, Shivdaspur, Manduadih, Varanasi UP - 221002	0542	2373432 / 36 / 37
37	Vijaywada	LGEIL, Door No 32-2/1-7, Ratnamamba Street, Prajasakti Nagar, Vijaywada - 520010, Andhra Pradesh	0866	2497283 / 87
38	Warangal	LGEIL, HOUSE NO. 1-8-598/1 FIRST FLOOR, BESIDE HDFC BANK NAKKALGUTTA, HANAMAKONDA-506001 (WARANGAL)	0870	2551453

Dealer name with Stamp **Dealer address**
IMEI No. **Date of sale** **Serial no.**

LG Electronics India Pvt. Ltd., Plot No. 51, Udyog Vihar Surajpur Kasna Road, Greater Noida, U.P.

SERVICE CENTER LIST



SERVICE



*MTNL / BSNL
**Prefix STD Code

1800-180-9999*
39-01-0909**

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Adhoni	RS CDMA	21/490, Arts & Science College Road, Near Devi Nursing home, Adhoni-518301	9346490905	Mr.Mohan
Andhra Pradesh	Adilabad	Kiran Mobile World	7-14-78/A, Near Nethaji Chouk, Cinema Road, Adilabad-504001	9346358181	Mr.Kiran Kumar
Andhra Pradesh	Amalapuram	Sandesh Cellular	D.No-4-2-14, Opp: S.K.B.R Collage AMLAPURAM-533201	9346398838	Mr.Ravi Kumar
Andhra Pradesh	Ananthapur	RK LG CDMA	Shop No 3, Cellular, Pallavi Towers, Opp to Canara Bank, Subash Road, Ananthpur-515001	241450,	Mr. Sridhar
Andhra Pradesh	Armoor	Sai Sri Electronics	Shop.no:2, mahalakshmi road, Armoor - 503224	9392622038	Mr.Srinivas
Andhra Pradesh	Bapatla	Vijaya Communications	Opp: Old Indian Gas Company, Sikaram Vari Street, G.B.C.Road, Bapatla	9346206305	Mr.B.Siva
Andhra Pradesh	Bhimavaram	Gopi Krishna Communications	JP Road Near Mohan Service Center Bhimavaram Pin-534202	9394071036	Mr.Siva
Andhra Pradesh	Chirala	Lakshmi Infocomm	Shop No.17&18 Banam Plaza, Munthavari Center, Chirala-523155	326000	Ms.Shakeena
Andhra Pradesh	Chittor	CMT Computer Services	18-162, High Road Opp.Bishnu Bhavan Hotel, Chittor	222733	Mr.Gopi
Andhra Pradesh	Cuddapah	Srinivasa Communication	Shop No.4, Siddapriya Complex, Opp. HP Petrol Pumping Point, Cuddapah	9346350224	Mr.Sahadeva Reddy
Andhra Pradesh	Dharmavaram	Siddharta Communications	Opp to Sathya Lodge, NPR Circle, Dharmavaram	9347064101	Mr.Shiva Ramkrishna
Andhra Pradesh	Eluru	S.S.Computers	Door.No:23B-4-8/3, Ayyapa Complex, Beside Kanuri Madhavi Hospital, Subbama Devi School Road, R.R.Pet, Eluru-534002.	329294	Mr.Diwaker
Andhra Pradesh	Gudivada	Kanakadurga-communications	Opp: Alankar Family Restaurant, Eluru Road, Nehru Chowk Center Gudivada	9394220688	Mr.Kumar
Andhra Pradesh	Gudur	Srinivasa Electronics	Ist floor, Airtel Building, Kummari Veedhi, Gudur - 524101, Nellore (Dt).	645644	Mr.Suman
Andhra Pradesh	Guntur	Vasavi Associates	Door No.6-7-36, V.S.N.Complex, 8th Line, Arundelpet, Guntur-522 002.	3257789	Mr.Satyam

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Hazurnagar/ Kodad	Sri Pavan Electronics	Mallika Towers, Besides Reliance Web World, Kodad - 508206	9346901519	Mr Narasimha Rao
Andhra Pradesh	Hindupuram	S.V.A Cellular	Shop.no:3, Vinayaka Lodge, Railway Road, Hindupur - 515201	320777	Mr.D.B.Ravindra Nath
Andhra Pradesh	Huzurabad	Bhargavi Communications	Shp No E-2, DCMs Complex, Near Bus Stand, Main Road, Huzurabad-505122	9391755619	Mr.T.Vishnu Vardhan
Andhra Pradesh	Hyderabad	Bhagya Communications	Shop no:109, Upper Ground Floor, #12-2-825, S.G.M. Mall, Mehdiapatnam, Hyderabad-500028.	32972308 / 32001406	Mr.Suresh
Andhra Pradesh	Hyderabad	JVR Communication	Shop No.8, Vanijya Vihar, Nalanda Building, Dilsukh Nagar Main Road, Hyderabad- 5000060	66109604	Mr.A.Venket nariyan reddy
Andhra pradesh	Hyderabad	Primus Infomatic & Software Pvt Ltd	#18/A, Methodist Complex, 5-9-190, Lane Opp to Chermas, Abids, Hyderabad	66755111	Mr.Govind Kabra
Andhra Pradesh	Hyderabad	LG Direct Service Centre	MCH No 6-3-852/3/A Ground floor, Vishwa Central, Nizamia Observatory Road, Ameerpet Hyderabad	40033769 / 70	Mr.Tarun Dandavate
Andhra Pradesh	Hyderabad	Reliable Communication	G-8, 3-6-561, AALTO'S A & M Trade Centre, HIMAYATNAGAR, HYDERABAD - 500029	9346320705	Mr.Sandeep Soni
Andhra Pradesh	Hyderabad	S V Electronics	Shop No. 41, Nilagiri Block, Aditya Enclave, Ameerpet Main Road, Hyderabad-500038	9346449323	Mr.Pradeep
Andhra Pradesh	Hyderabad	Shweta Communications	Shop No.9, Ground Floor, Pavani Ansuya Complex, Opp. Huda Complex, Tarnaka, Hyderabad	32968162	Mr. Sandeep Heda
Andhra Pradesh	Hyderabad	Shweta Computers	# 1-7-69/1 & 2, OPP Aditya Delux Hotel, Near Paradise circl, Sarojini Devi Road, Secunderabad - 500003	27721076 / 32977548	Mr.Sandeep
Andhra Pradesh	Hyderabad	Sreenivasa Technologies	SAI VIKRAM TOWERS, SHOP NO :4, RELIANCE WEB WORLD BUILDING, Balagi Nagar Kukatpally	32961479	Mr.Praveen
Andhra Pradesh	Hyderabad	Sri Surya Communications	#Madhu Enclave, Street no 06, Shyamlal Buildings, Begumpet, Hyderabad	32961127	Mr.Nageswara Rao
Andhra Pradesh	Hyderabad	Sri Varun Electronics	D.No 5-8-344/1, " DHAN BHAGYA ESTATE ", Chirag Ali Lane, Abids, Next to Raghava Ratna Towers, Hyderabad - 500 001	32900909 / 55781999	Mr.Alokh Mohan
Andhra Pradesh	Hyderabad	Sunbeam Technologies	120, Chenoy Trade Centre, Parklane, Near Paradise, Secunderabad -500003	40200193 / 66383193	Mr.Suresh
Andhra Pradesh	Jagityal	SS Communications	Opp Kanti Bhavan Lane, Duwarka Nagar, Jagtial	9391533535	Mr.Hari
Andhra Pradesh	Jangaon	Sky Win Communications	#2-7-134, Beside Bharat Gas, Bus stand Road, Jangoan-506167.	9390102839	Mr. Varun

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Jangareddygudem	Sri Devi Communication	Near Gangallama Temple, Opp. Andhra Bank, Jangareddygudem	227297	Mr. Prasanna Lakshmi
Andhra Pradesh	Kakinada	Delta Infotech	Door No. 6-1-29, Opp. Swami Vivekananda Park, Jawahar Street, Surya Rao Pet, Kakinada - 533001	5593533	Mr. Shivanand
Andhra Pradesh	Kamareddy	Pager King Communication	Sircilla Road, Kamareddy, Dist. Nizamabad - 503 111.	9397366633	Mr. Moizuddin
Andhra Pradesh	Karimnagar	SS Marketers	2-8-40, Mukarampura, Near Circus Grounds, Karimnagar	9391552223	Mr. Cheakradhar
Andhra Pradesh	Kavali	Sree Balaji Infotech	Prasad Complex Trunk Road, Near Ongole Bus Stand, Kavali	6329567	Mr. G. Sri Sai Charan
Andhra Pradesh	Khammam	Sriven Technologies	D.No:11-2-37, Shop No.3, D.V.Krishna Complex, Beside Baburao Petrol Bunk, Balaji Nagar, Wyra Road, Khammam-507002	9396698866	Mr. Bhaskar Reddy
Andhra Pradesh	Kothagudem	S. Swathi CDMA Service Center	9-3-3, Above Sindhura Electronics, Near RTC BUS Stand, Kothagudem-507101	9391552228	Mr. Niaz Ahmed
Andhra Pradesh	Kuppam	Sagar Computer Services	14-204, PALACE ROAD, KUPPAM-517425	9391862436	Mr. Sagar
Andhra Pradesh	Kurnool	R K LG CDMA	Shop no:26, 27, First floor, UCON Plaza, Kurnool-518001	220201	Mr. G. Rama Krishna
Andhra Pradesh	Machilipatnam	Om Sree Sai Communications	25/276, Kota Vari Tulla Center, Jaganadhapuram, Machilipatnam	9347741777	Mr. Rafee
Andhra Pradesh	Madanapalle	Sri Balaji Computers	Shop No:2, 1st floor, Sri sai Complex, CTM Road, Madanapally - 517325	9390025204	Mr. Manohar
Andhra Pradesh	Mahabubnagar	Sri Chakra Mobile Care Centre	Shop.no:15, Shareef Complex, Near Bus stand, Mahbubnagar - 509002	9396348999	Mr. Anil
Andhra Pradesh	Mancherial	SS CDMA Service Centre	Shop no.7, Mounika Complex, BPL Chourasta, Manchiryal-504208	9394552223	Mr. Rajesh
Andhra Pradesh	Medak	Balaji Communications	Door.no:1-3-77/j, Opp to State bank of Hyderabad, Main Branch, Main road, Medak	9346439961	Mr. Sudharkar
Andhra Pradesh	Medchal	Khan Electronics	Sanjeeva Reddy Complex, Besides RTC Bus Depot, Medchal - 501 401	9347222088	Mr. Jaleel Khan
Andhra Pradesh	Miryalguda	Needs Electronics	Jagannath Complex, Opp Bus Stand, Miryalguda - 508207	9394645696	Mr. Ravi Kumar
Andhra Pradesh	Nalgonda	Quintessence Electronics	Shop No :5, Srinivasa complex, Opp to market office, HYD road, Nalgonda - 508001	9396610220	Mr. Venkateshwar Rao
Andhra Pradesh	Nandyal	Dhanush Systems	Dno:25/165 B, Sanjeev Nagar, Near Ramalayam, Nandyal	9392236699	Mr. Ramesh
Andhra Pradesh	Narasaraopet	Rajendra Infotech	D.No -90-11 -10/7, Saradhamba Compelx, Arundelpet. Near S.B.I ATM Narasaraopet	224136	Mr. Sasi Bhushan

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Nellore	Balaji Watch & Electronics	16/249, Trunk Road, Nellore-524001	2339999	Mr.Rajesh
Andhra Pradesh	Nellore	Tirumalaa Electronics	Shop No. 26, 1St Floor, Co-Operative Bank Complex, Near Gandhi Statue, G.N.T . Road, Nellore	3290339	Mr.Pratap
Andhra Pradesh	Nirmal	Om Sai Electronics	Shop.no:1, Kala Nagar road, Beside 2 town Police station, Nirmal - 504106	9390000024	Mr.Mahendar
Andhra Pradesh	Nizamabad	Satya Electronics	# 7-10-65, Shop no 1, 1 st Floor, H.M.H.V Complex, Beside Bus Stand, Nizamabad-503001	326000	Mr.Venu gopal
Andhra Pradesh	Ongole	Tejasri Communications	37-1-107, Opp: Kerala Bakery, Near Mastan Darga Center, Trunk Road, Ongole	9393026115	Mr.Sasi Bhusan
Andhra Pradesh	Peddapalli (Ramagundam)	Abhi Marketers	Shop No:19/8/291, MRK Plaza, Lakshmi Nagar, Godhavari Khani - 505209	9399987773	Mr.Nagaraj
Andhra Pradesh	Peddapuram	Devi Infotech	Opp. Veterinary Hospital, Shop No. 1, Santa Market Road, Peddapuram	6593533	Mr.Siva Kumar
Andhra Pradesh	Prodattur	SV Techonolgies	4-625-3, Gandhi Road, Opp Karur Vysya Bank, Produttur	9347251806	Mr.Ravi Kumar
Andhra Pradesh	Rajamundhary	Siri Infotech	Police Welfare Complex, City Hospitals Junction, Danvai Pet Main Road, Rajahmundry	9397925799	Mr Raghvendra
Andhra Pradesh	Raychoti	Raju Computer World	Room No 3 Up Stairs Syeedia complex, bustand road, Rayachoty	9346209881	Mr.Raju
Andhra Pradesh	Repalle	Sri Satya Solutions	D.no- 10.14.125 (UP Staires) Municipal Office Road, Railpet, Repalle-522265	9396222993	Mr.Sridhar
Andhra Pradesh	Sangareddy	Sri Technologies	Srimaan Complex, Beside Inspection Bungalow, Main Road, Sangareddy. 502001, Medak Dist	9391216573	Mr.Ajaz Ahmed
Andhra Pradesh	Sattenapalli	S.S.Communications	Opp.Telephone Exchange, Sattenapalli	9397610550	Mr.Sai
Andhra Pradesh	Shad Nagar	Sri Gana Electronics	Shop No : 2, Khajja Veeresam Complex, College Road, Shadnagar - 509216	9392633111	Mr.Vigneswar
Andhra Pradesh	Siddipet	Gopala Krishana Communications	SHOP NO:13, FIRST FLOOR, MACCA COMPLEX, , OPP:CITIZEN'S CLUB, M.G ROAD, SIDDIPET - 502103. (A.P)	9392511064	Mr. Nagaraj
Andhra Pradesh	Srikakulam	Venkateshwara Infotech	Raja Commercial Complex, Opp.Electrical Office, Ground Floor, Shop No.10 & 11, GT Road, Srikakulam	324577	Mr.Kiran Kumar
Andhra Pradesh	Srikalahasti	KSV Computer Services	NNR Buildings, d.no:16-582, Panagal road, Srikalahasti 517644	9390044399	Mr.Sahadeva Reddy
Andhra Pradesh	Sullurpet	Sai Baba Electronics	S.V.T Street, Opp: Reliance Office, Sullurpet	9346920527	Mr. S. Venkata Krishna

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Tadepalligudem	Sri Haripriya Infotech	Thota Gopi Complex, Police Quarters Lane, Beside Zp High School, Tadepalligudem	9346445720, 08818-210565	Mr.Suresh
Andhra Pradesh	Tanuku	Shivanand Enterprises	Door No. 34-3-3, Main Road, Gamini Compound, Tanuku	9346408640	Mr.Srinivas
Andhra Pradesh	Tenali	Vaishnavi Infotech	D.No:22/11/114, Opp. Kanikacharla Kalyanamandapam, Bose Road, Tenali.	9347651330	Mr.Murali
Andhra Pradesh	Tirupati	CMT Communication	13-7-796/14/3, TUDA OFFICE Road, Tirupathi-517501	3296979	Mr.K Vasu Naidu
Andhra Pradesh	Vijayawada	K L Computer House	39-9-46, Svs Temple Street, Labbipet, Vijayawada	6520461	Mr.Kartik
Andhra Pradesh	Vijayawada	V V Communications	28-23-31/32, Opp.Swarugha Foods, Vijay Talkies Center, Vijayawada	320866-320988	Mr.Rahul
Andhra Pradesh	Vishakapatnam	Jai Bharani Communications	Door No:52-11 -7/7, Sapthagiri Plaza, Old Resuvanipallem, Vishakapatnam-13	6634666	Mr:PVenkatapathi Raju
Andhra Pradesh	Vishakapatnam	Sri Sai Ganesh Infotech	G5, Ground Floor, Backside of Sangam-Sarat Theatre, 1st Lane, Dwarka Nagar, Visakhapatnam - 530 016.	3258777	Mr.Chandra Shekar
Andhra Pradesh	Vizayanagaram	S R Technologies	D.No:1-9-1/44, Opp: Z.P Office, Railway Station Raod, Vizayanagaram.	9346418791	Mr.Balakrishna
Andhra Pradesh	Vuyyuru	Sugreeva Communications	Behind Datta Automobiles, Katturu Road, Vuyyuru	9393033355	Mr.Phani
Andhra Pradesh	Wanaparthy	Sri Ganesh Electronics	Shop No : 16-63, Opp R R Compex, Wanaparthy - 509103, Dist Mahabubnagar	9396800275	Mr Deva Raj
Andhra Pradesh	Warangal	S S Marketers	6-1-73/1, Sai Bhavan, Sridevi Theatre Road, Hanamkonda, Warrangal-506001	2552223	Mr.L.Srinivas Rao
Andhra pradesh	Zaheerabad	Renuka Technologies	Shop no:123/1, First Floor, Alipur, Zaheerabad.Pin-502220	316143	Mr.Abhiram Joshi
ASSAM	Gwahati	PRAGATI SERVICES	2nd Floor, Kiranhangsha Commercial Complex, Dr J.C. Das Road, Harisabha, Panbazar, Guwahati, Assam	2733501	Mr. Pradeep Khaitan
Assam	Silchar	IT ONLINE	N.S.Avenue, Rangirkhari, Silchar, Cachar, Assam	221260	Mr.Sharma
Bihar	Arrah	Surya Services	Sushila Bhawan, Suryapuri colony, By pass road, Arrah	9334538845	Mr.Sanjay Kumar
Bihar	Begusarai	Krishna Communication	Eashwari Complex, Dak Bangla Chowk, Bishnupur, Begusarai, Bihar-851101.	9334341700	Mr.Dinkar Kumar
Bihar	Bhagalpur	Printronic Infosolutions	Ganpati Complex, 1st floor, Patel babu road	9934605864	Mr.Himansu Shekhar
Bihar	Bhagalpur	S.K.Communication	NEAR RAILWAY STATION, Super Market Complex, Patel Babu Road, BHAGALPUR-812002	9334255275	Mr.Kundan Kumar
Bihar	Biharsharif	Shanya Infotech	Magdha Commecrcial Complex, 1st.Floor, Shop.No.5, MG Road, Bharaopar, Bihar Sharif, Nalanda Dist. Bihar.	9334048037	Mr.Amit Kanchan

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Bihar	Chapra	Ambey Associates	D-23, Hathwa Market, Chapra, Dist: Saran-841413 Bihar.	9334295605	Mr.Jayant Kumar
Bihar	Darbanga	Prime Computer	Hanuman Nagar, Doner Road, Darbanga.	9334934065	Mr.Abhinav Kumar Verma
Bihar	Gaya	Louts Enterprises	Opp.Aviva Life Insurance, Kanya High School Road, Ramna, Gaya.	9334492033	Mr.Pankaj Ranjan
Bihar	Muzafarpur	Krish Enterprises	Nr.Kanhoulina.no.2, Kachisarai Road, Muzafarpur.	9304410745	Mr.Sanjeev Kumar
Bihar	Patna	Competent Mobile Service	Shop 1, Hotel Lalitha Complex, East Bowring Canal Road, Patna	9334027706	Mr.Mohit Ahluwalia
Bihar	Patna	Infotek Trading Company	1st floor, City Palace, New Dak Bunglow Road, Patna-800001	9334116145	Mr.Sanjay Choubey
Bihar	Patna	Micro Zone-Patna	A.H Complex, # G26, Near Kotak Mahindra Bank, Exhibition Road, Patna	3294696	Mr.Mithlesh Kumar
Bihar	Patna	Synerzy Trading Company	G-01, Chanakya Plaza Complex, Main Road, Kankarabagh, Patna.8000020	2356900	Mr.Vikas Chandra
Bihar	Purnea	Micro Zone-Purnea	Narottam Hata, Opp.Dr.PC.JHA, NH-31, Purnea-854326	9304166633	Mr.Amit Kumar
Bihar	Sasaram	Nandika Enterprises	Hari Complex, Panjab National Bank, Sasaram, Rohtas-821115 (Bihar)	4222008	Mr.Abhinav Gupta
Chattisgarh	Ambikapur	Neha Communication	Ramanuj Ganj road, Opp. Kosa Form, Ambikapur, Sarguja, Pin-497001	240427	Mr.Rishi Dubey
Chattisgarh	Bhilai	A B Automation	Shop no. 242, 1st floor Chouhan Plaza, GE Road, Supela Bhilai, Chhatisgarh- 490023	2295989	Mr. Satish Singh
Chattisgarh	Bhilai	Sai Ram Electronics	SHOP-NO-52/90, HIMALAY COMPLEX, AKASH GANGA, SUPELA, BHILAI	4038917	Mr. Balan
Chattisgarh	Bilaspur	Mahamaya Infotech	Shop No 203, Jain Plaza, Ground floor, Link Road, Bilaspur	2413865	Mr. Pawan Kumar
Chattisgarh	Korba	Star Mobile Services	SS PLAZA, FD-13 POWERHOUSE ROAD, KORBA-495678	9300401485	Mr. Anish Menon
Chattisgarh	Raigarh	Blue Chip Computer	Purana Sadar Bazaar, Raigarh, Chhatisgarh.	9977217776	Mr. Ashok Agrawal
Chattisgarh	Raipur	Cybernet Systems	B-2, 1st Floor, Garchaz Complex, Jail Road, Raipur - 492001	406771	Mr Anand Singh
Chattisgarh	Rajnandgaon	Bhavye Services	SHOP NO 5, BELOW SBI, STATE BANK OF INDIA, KAMPTTEE LINE, RAJNANDGAON.	324200	Mr. Manish Golcha
Delhi	New Delhi	Aegiss Infotech	UG-25, Ansal Chamber -2, 6, Bhikaji Cama Place, New Delhi-110066	65477740	Mr. Atul Gupta
Delhi	New Delhi	Arham Infotech Services	4737/A 23, Ansari Road, Daryagunj, Delhi-110002	41501124	Mr. Anil Surana

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Delhi	New Delhi	Comhard Systems	D-30, 31, First floor, Near Hotel Shipra, Main Vikas Marg, Lakshmi Nagar	32955887	Mr Ravi Kant Gupta
Delhi	New Delhi	Comhard Systems	B-120, Hardev Puri, 100 Feet Main Road, Near MTNL Office, Nathu Colony Chowk, Shahdra, New Delhi - 110 093.	32575507	Mr. Ravi Kant Gupta
Delhi	New Delhi	Connexions And Communications	183, Avtar Enclave, Opposite Nirula's, Pashchim vihar, New Delhi-110063	32451431	Mr. Bhupinder Agrawal
Delhi	New Delhi	Cube Engineers And Consultants Pvt Ltd	A-65, Naraina Industrial Area, Phase-1, New Delhi	65450272 / 41411620	Mr. Arvinder
Delhi	New Delhi	Elcom Trading Company Pvt. Ltd.	G-1, Goverdhan Building, 53-54 . Nehru Place, New Delhi -110019.	64582709	Mr. Somesh Narang
Delhi	New Delhi	Innovative Telecom	304, GDITL Northex Towers, A-09, 3rd Floor, Northex Tower, Netaji Subhash Place, Pitampura, New Delhi-110 088.	32925753 / 65154340	Mr Manoj Garg
Delhi	New Delhi	Nice Telecom	15/19 & 15/21, DDA Complex, Nangal raya, Near D Block, Janakpuri, Delhi - 110046	9350863630	Mr. Ripul Garg
Delhi	New Delhi	Sukriti Communication	101 Patparganj- Mayur Vihar phase -1 - New Delhi - 110091	32498011	Mr.Dipendra kumar chaturvedi
Delhi	New Delhi	Teletalk	C-21, First Floor, Near Bus Stand, Bhajan pura, Delhi-11053	9818400551	Mr.B.C.Vashist
Delhi	New Delhi	Touch Tone Telecom	B-52, First Floor, Kalkaji, New Delhi	32939031	Mr. Ashish Dey
Delhi	New Delhi	Ucom Technologies Pvt Ltd.	45, 1st Flr, Corner Mrkt, Malviya Nagar, New Delhi - 110017	41745469	Mr. Neeraj
Goa	Margoa	SKY LARK	SHOP NO 05.CARVALHO APPTS, NEAR RAILWAY CROSSING, COMBA,	2736100	Mr.CHRIS
Goa	Panjim	Mandovi Mobiles	Mohidin Towers Do. No. AS3 Opp to Hotel Manashanti Dadavaidya rd Panjim-403001	6452949	Mr. Prakash
Gujarat	Ahmedabad	A Com Technologies	Shop No-37, 1st Floor, Shubh Complex, Near Rajasthan Hospital, Camp Road, Shahibaug, Ahmedabad-380004	32940560	Mr. Vijay.S.Gohel
Gujarat	Ahmedabad	Mishree Communication	FF-17, RUDRA SQUARE, OPP. JUDGES BUNGALOW, POLICE STATION, BODAKDEV, AHMEDABAD-54.	32508491	Mr. Mitesh Patel
Gujarat	Ahmedabad	Silicon Valley	9, Gokul Palace, Maninagar Cross Road, Maninagar Ahmedabad-380008	30225430	Mr. Rajesh Patel
Gujarat	Ahmedabad	Vision Communication	33, 1st Floor, Sukh Sagar Complex, Opp. Dinesh Chamber, Bapunagar, Ahmedabad -380024	65122322	Mr Ajay Kachhadiya
Gujarat	Amreli	Precision Telecom	32, 33 Opera House, Station Road, Amreli	230940	Mr. Kamlesh Tank

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Gujarat	Ankaleshwar	Akshar Telecom	C/1 Keval Shopping Center, old National Highway No.8, GIDC, Ankaleshwar-393001	250860	Mrs. Anita Amin
Gujarat	Bharuch	Akshar Telecom	Pramukh Swami Complex, Panch Batti, Bharuch	2241027	Mr. Hanif Patel
Gujarat	Bhavnagar	Shivshruti Services	981/B, Makvana Building, Down Chowk, Bhavnagar .364001	3296222	Mr. P D Jala/ Sandeep patel
Gujarat	Bhuj	Infotech Computer	2nd Floor, NarNarayan Chambers, Opp Indian Airlines Office, Station Road, Bhuj	324295	Mr. Vasant Mepani
Gujarat	Gandhidham	Vansh Electronics	Shop No. 35, Swami Vivekanand Complex, Near Oslo Circle, Gandhidham	232739	Mr. Siddarth Gajjar
Gujarat	Gandhinagar	Creative Communications	Shop No 102, Suman City, Sector 11, Gandhinagar-382011	23226241	Mr. K.J.Barot
Gujarat	Himmatnagar	Jay Telecommunications	B-F 105, 1st floor, Durga Complex, Near Railway Station, Himmatnagar	329532	Mr. Manibhai Patel / Neeraj patel
Gujarat	Jamnagar	Sudarshan Infosys	"Shraddha", Park Colony, Motor House, Near axis Bank, P.N.Marg, Jamnagar 361008	2552696	Mr. Amit Unadkat
Gujarat	Junagarh	K.J.Traders	29/30, Danapith, Junagadh	2627320	Mr. Paresb Rughani
Gujarat	Kalol	Maitree Communication	B/93, Yogi Complex, opp. Mahendra Mill Road, Kalol	325288	Mr. Jignesh Shah
Gujarat	Mehsana	Prime Computer Consumables	15-B, Vimal Super Market, B K Road, S.T.Workshop Road, Mehsana-384002	2325123	Mr. Suketu Patel
Gujarat	Morvi	Pulse Sales And Services	SHOP NO 6 MADHAV MARKET FIRST FLOOR NEAR NEW S.T.STAND SANADA ROAD Morvi-383641	9428565667	Mr. Natubhai Patel
Gujarat	Navsari	Deep Enterprise	10, Upper Level, Diamond Palace, Sayagi Road Sattapir, Navsari-396445	324095	Mr. Vinod Kasundra
Gujarat	Palanpur	Shree Manibhadra Mobile	21 -First Floor, aroma arcade, opp jilla panchayat, near kozi tower, Palanpur-385001	300001	Mr. Panchal Sunil D
Gujarat	Patan	Able Infotech	9, Palika Bazar Complex, Rajmahel Road, Near Santokba Hall, Patan	9924256068	Mr. Rakesh Bhai
Gujarat	Porbandar	Varun Infotech	1ST Floor, Garden Café Building, Opp.New Fountain, Nr.old R.T.O Office, Porbandar - 360575	3290285	Mr. Mitesh Changela
Gujarat	Rajkot	Joshi Telecom	Shop No.8, Kuber Complex, Opp Chandubhai Bhelwala, Dr Yagnik Road, Rajkot	6530707	Mr Jiten Dave
Gujarat	Rajkot	Roopang Infocare	Vinod Nivas, 4, Sardarnagar(West), Nr Astron Cinema, Rajkot-360001	2464485	Mr. Kishore Patel

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Gujarat	Surat	Excel Solutions	H-3, Ruchi Flats, Near Iqara Building, Adajan Hazira Road. Surat-395009	6544500	Mr. Virender Jain
Gujarat	Surat	Om Sai Services	39, Golden Point, Near Science Laboratory, Ring Road, Surat	3231233	Mr. Dharmesh Patel
Gujarat	Surendranagar	Nihaal Computer Services	94 Old Housing Bord Opp Muni. Scool No.13, Surendranagar.	320375	Mr. Sikandar
Gujarat	Vadodara	Shreeji Telecom	SB-10, Windsor Plaza, R.C.Dutt Road, Alkapuri, Vadodara - 390002	9328093424	Mr. Jignesh Gohel
Gujarat	Valasad	Klassik Stationo Products	10, Jethalal Mulji Market, Halar Road, Valsad -396001	329363	Mr. Darshan Panchal
Gujarat	Vapi	Klassik Stationo Products	116, Bhanudarshan Co-Op Society, Koparli Road, Near Gunjan Cinema, GIDC, Vapi	3292363	Mr. Avishek Suhasaria
Gujrat	Anand	Zainee Mobile	2nd Floor, Limbuwala Complex, Nr. GPO, Opp. Kavita Shopping Centre, Anand	9375960954	Mr. A. J. Raja
Haryana	Ambala	Bee Ess Aar Communication	26 First floor MC Market Behind Negar Cinema Ambala Cantt-133001	4006229	Mr. Rajiv Gupta
Haryana	Bahadurgarh	Unique Telecom	Shop No.5, Rajaram Market, Main Najafgarh Road, Bahadurgarh, Near Bajaj Showroom	9315873676	Mr. Harinder
Haryana	Bhiwani	Sandeep Electronics	10 th Plot, First Floor, Circular road, Mahem Gate Chowk, Near Kajal's Nursing Home, Near Vodafone Office, Bhiwani, Haryana - 127021	252000	Mr.Sukhveer Saini
Haryana	Faridabad	Comsoft Computers	601/1 Gopi Colony Chowk- Sector-19, Near Prem Prakash Ashram, OLD Faridabad-121002	4104252	Mr. Ashwani Jindal
Haryana	Faridabad	VR Infocomm	Shop No.44, Neelam Fly Over, Neelam Chowk, NIT Faridabad.	4031959	Mr. Vinod Kumar Gupta.
Haryana	Fatehabad	Sky Lark Mobile Point	4, G.T.Road, Near Bus Stand, Marla Colony, Fatehabad	989655244	Mr.Pankaj
Haryana	Gurgaon	Signature Communications	B-100 A, South City -1, Opposite - Huda Gymkhana Club Near Signature Tower - Gurgaon 122001	4102709	Mr. Raj Kumar Garg
Haryana	Gurgaon	Lalji Communication	SCO-31, - First Floor, Above MTNL Sanchar Haat, Main Market, Opp. BSNL Exchange, Sector-12A, OLD Gurgaon -122001.	3200900	Mr.Bharat Bhushan
Haryana	Gurgaon	LG Direct Service Centre	B-36, 37 & 38, Industrial Area, Mehrauli Gurgaon Road, Near Bata Chowk, Gurgaon - 122 001.	3027300	Mr.Deepak
Haryana	Hissar	Parnami Communication	32, Red sqaure Market, Near Dena Bank, Hissar, Haryana-125001	9354332000	Mr.Pradeep Garg
Haryana	Jind	Gaurav Telecom	Shop No.19 Near Rani Talab, Near Bharat Electronics, Jind	325400	Mr. Deepak Garg
Haryana	Kaithal	Mahesh Communication	Shop no.22, Bajrang Bali Market, Near Randhir cinema- Kaithal	9315146000	Mr.Mahesh

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Haryana	Karnal	Mass Communication	Shop No.68, Main Market, Ground Floor, Moughal Canal, Karnal - 132001	3290717	Mr.Davender Yadav
Haryana	Kurukshetra	Bharti Communication	3, Krishna Market, Opp.Purohit Sweet House, Pipli Road, Kurukshetra, Haryana-	9354165077	Mr.Vijay
Haryana	Narnaul	Prime Communication	Shop no.8, 1st Floor Taneja complex, near Nirula Hotel, RewariRoad Narnaul	9355375351	Mr.Naveen
Haryana	Palwal	Shree Ganesh Communications	Basant Apts, Shop No.5, Kithwari Chowk, Mathura Road, Near Saraswathi School, Palwal	321028	Mr.Harish Chandra
Haryana	Panipat	INS Telecom	2, Bishan Sarup Colony, Opp Bus Stand, Near Hotel Deep, Panipat	9354917110	Mr.Pankaj kumar
Haryana	Rewari	Mahak Tele Services	53-A, Model Town, Near Shreeji restaurent, Rewari	329222	Mr.Gaurave Yadve
Haryana	Rohtak	Telecentre	13, Apna Bazar, Civil Hospital Road, Near Chhotu Ram Chowk, Rohtak-124001	247242	Mr.Mr.Madaan
Haryana	Sirsa	Sirsa Communication	168, Huda Complex, Old Bus Stand, Sirsa	329591	Mr.Rajindera
Haryana	Sonipat	Teleworld	Shop No 20, 1st Floor, M.C.Market, Subhash Chowk, Sonipat, Haryana-138001	3290889	Mr.Vipin Dua
Haryana	Yamuna Nagar	Krishna Communication	Shop No.-24/75, Thapar Colony, OPPOSITE SWANTANTAR FANCY LADIES SUITS, NEAR FOUNTAIN CHOWK, YAMMUNAGAR HARYANA- 135001	200610	Mr. Harsh/Mr. Pradeep
Himachal Pradesh	Dharamshala	Deepsun	Near Sharma Studio, opp Mickey tour and travel, kotwali bazar Dharamshala, 176215	9318679122	Mr.Deepak
Himachal Pradesh	Mandi	V.M.Communication	NEAR PNB MOTI BAZAAR, MANDI-175001	9318666005	Mr.M Mahender Singh Thakur
Himachal Pradesh	Palampur	Electronic Home	Kallu Di Hatti, PO Maranda Thasil, Palampur, Distt-Kangra-176102	238463	Mr.Ravi Kumar
Himachal Pradesh	Poanta Sahib	Singal Marketing	Badri Nagar, Near LIC Office, Poanta Sahib	9318785134	Mr.Rajesh Singal
Himachal Pradesh	Shimla	Hanu Computers	76/ 9, 2nd floor LoweR Bazar Shimla	2650560	Mr.Sandeep Patial
Himachal Pradesh	Solan	Vikas Mobile Repair Center	MOHAN COMPLEX, First Floor Upper Bazar-173212	9816271183	Mr.Vikas
Jammu & Kashmir	Jammu	Mobile Care	608-A Gandhi Nagar Behind Laxmi Narayan Mandir	2436814	Mr.Dixit Gupta
Jammu & Kashmir	Srinagar	The Net Surfer	2nd Floor Mohi-ud-Din Building, Poloview, srinagar	2459549	Mr.Wasim
Jammu & Kashmir	Udhampur	Service Solutions	Ward No. 15 Shakti Nagar Opp. Old ITI Udhampur	276724	Mr.Rakesh

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Jharkhand	Bokaro	Digital Equipment Centre	GB-11, City Palace, Opp.Indian Bank, Bokaro.	9334072270	Mr.Dewashish Ojha
Jharkhand	Daltonganj	Maa Mobiles	Jail Road, Jail Hata, Dalton Ganj-822101	9304285663	Mr.Navin Kr. Kashyap
Jharkhand	Deoghar	Kanan Electronics	Hotel Relax Complex, BLC Road, Deogarh-814112	9304059528	Mr.Mahesh Sharma
Jharkhand	Dhanbad	Nirmala Entreprises	Ground Floor, Muskan Complex, Nr.Subhash Chowk, Dhanbad.	9334027583	Mr.Niraj Sinha
Jharkhand	Godda	Karan Mobilink	Maa Kalyani, Katra, Main Market, Godda, Jharkhand-814133	9334449900	Mr.Saroj Kumar Jha
Jharkhand	Hazaribagh	Digital Services	Plaza Mkt, pugmill road, Nr.Kallu Chowk, Hazaribagh.	9334599570	Mr.Shish Alam
Jharkhand	Jamshedpur	Prasad Electronics	Nr.Bus stand, Community Center, Kagal Nagar, Jamshedpur.	2226077	Mr.Raju/ Saritha
Jharkhand	Jamshedpur	Tirupati Teletech	Chakravarti Compound, Near Hotel Castel, Contractors area, Bistupur, Jamshedpur-831001	3293331	Mr.Abhijeet Mukherjee
Jharkhand	Ramgarh	Shreyas Empaire	Bus Stand Complex, Ramgarh-829122	9334085642	Mr.Piyush
Jharkhand	Ranchi	Balaji Infotech	Near Dr.Kashyap Eyeclinic, Purulia Road, Ranchi.	3205400	Mr.Sanjeev, Mr.Sunil Kedia
Jharkhand	Ranchi	Satya Systems & Solutions	158, Opp Hotel Palace, Kadru, Ranchi-834002	3291019	Mr.Amit Rastogi
Karnataka	Anekal	Sri Venkateshwara Communications	# 37, KSRTC COLONY, HOSUR MAIN ROAD, ANEKAL TALUK, BANGALORE - 562106	320078	Mr.R.Jaganath
Karnataka	Bailhongal	3G Communication	Shop No 459\2 Near Inchal Cross Belgaum Road Bailhongal-591102	9343815097	Mr.Vishwanath
Karnataka	Bangalore	Ascent Communication	No:113, St Johns Church road, Bangalore - 560005	32914856	Mr.Kumaresan
Karnataka	Bangalore	CRYSTAL INFOCOM	SRILAKSHMI VENKATESHWARA COMPLEX, SHOP No. B-5, 33RD Cross, 11 th Main, 4th Block Jayanagar, Bangalore-560010	32710202	Mr.Prasad
Karnataka	Bangalore	LG Direct Service Centre	No: 93, TKN Mansion, KH Road (Double Road), Bangalore	41145145 / 9739983435	Mr.Raju Naik
Karnataka	Bangalore	Optima Mobile Services	24/2, Dr.Rajkumar Road, Near Subramanyanagar Police Station, 2nd Block, Rajajinagar, Bangalore - 560 010	23131953 / 65722205	Mr.Unni Krishnan
Karnataka	Belgaum	Hello India Telecom	G-4, Maratha Mandir Complex, Khanapur Road, Near Railway Flyover, Belgaum - 590 001.	4211329 / 2420533	Mr.Mohan
Karnataka	Bellary	MAKAM ELECTRONICS	# 90 C/16 HIMALAYA BUILDING K.C.COLONY BELLARY 583101	655043	Mr.Krishna Murthy Makam

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Karnataka	Bhadravati	Digital Communication	SR Complex 4th cross B H Road Bhadravathi-577301	9341081291	Mr.Nagabushan
Karnataka	Bhatkal	Vijay Communication	Hussian Complex Bunder road Bhatkal - 581320	300027	Mr.Vittal H.Naik
Karnataka	Bidar	Mayuri Infotech	Ravi complex, shop no: 4, Udgir road, Bidar-585401	225544	Mr.Ravi Halhalli
Karnataka	Bijapur	Turning Point Computers	Khed building, opp Vijaya college, Sholapur road, Bijapur-586103	329318 / 300005	Mr.S.M.Hiremath
Karnataka	Channapatna	C&C Technology	"Ramanujam Nilaya" No.2104, 11 th Cross, Kuvempunagar B M Road, Channapatna - 571501	7251716	Mr.Charan
Karnataka	Chikaballpur	Sri Ram Prasad Enterprises	1 st Floor: BB Road, Beside State Bank of Mysore, Chikballapur-562101	325567	Mr.Vardharaj
Karnataka	Chikmagalur	Cell Tec Electronics	Ragavendra complex, NMC circle, Neharu road, Chikmagalur - 577101	9341013183	Mr.Prem Kumar
Karnataka	Chintamani	Amrutha Mobiles	# 5, Venkatadri Complex, M.G. Road, Opp to Adarsha Theater, Chintamani - 563125	9342262811	Mr.Sudarshan Reddy
Karnataka	Davangere	Kruthika Communication	Shop No: 6, Park View Plaza, (Income Tax Office's Ground Floor), 4th Main, Near Vishweshwaraiah Park, P.J. Extension, Davangere-577002	325444	Mr.Sujay
Karnataka	Gokak	Cell World	Banshankri Complex, Basaweshwara circle, opp to court Gokak - 591307	9343441777	Mr.Shivanand / Chougala
Karnataka	Gulbarga	Aishwaraya Communication	C-9, Asian Plaza S.V.P.Chowk Main road Gulbarga-585102	329447	Mr.Mallikarjun
Karnataka	Hassan	Sree Digital Solutions	1380 Mission Hospital road opp Hindibed college - 573201	9343566658	Mr.Vidya Shankar
Karnataka	Hosakote	Exposys Communication	Shop no 1, Mahalatha Devi Complex M V Badavane, College Road, Hoskote-562114	7931229	Mr.Raghunandan
Karnataka	Hubli	Shruti Services	A-115, (Lower Ground Floor), IT PARK, Opp. Glass House, Hubli - 580029.	3290671	Mr.Mahendar
Karnataka	Hunsur	Sriram Infocom	No.6, Municipal complex, H.D.Kote road circle - 571105	253699	Mr.H.H.Pradeep
Karnataka	Kadur	Ashwa Tele Mobiles	Opp. Basaweshara Hospital, T.B Road Kadur	9341033310	Mr.R.Ananda Murthy
Karnataka	Kankapura	Sumukh Communications	Harshitha Complex, Budikere, Bangalore main rd, Near KSTC Bus stand Kanakapura-562117	9342743344	Mr.R.C.Harish
Karnataka	KGF	Global Net Communcations	Opp. King George Hall, Geetha road Robertson pet, KGF - 563122	329559	Mr.Shiva Kumar
Karnataka	Kolar	Seanmatrix	No:384, Suguna complex, Near KSRTC bus stand, Anthargange road, Kolar 560101	2228714	Mr.Nithyanada Shetty
Karnataka	Kumta	Krishna Mobiles	938, College road, NH 17, opp RWW, Kumta - 581343	329607	Mr.D.V.Prabhu

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Karnataka	Madikeri	C.M.Communications	Shop no. 8, First Floor, M A Complex, Kohinoor Road, Madikeri	9343837555	Mr.Mohamad Sharief
Karnataka	Mandya	C & C Technology	2068, First Cross, Subhash Nagar, Krishna Krupa Nilaya, Mandya-571401	402007	Mr.Charan
Karnataka	Mangalore	Innovative Infocom	15-10-537/11, Jayavarma Centre, Mallikatte Circle, Kadri, Mangalore - 575002.	6563244	Mr.Sebastian Fernandes
Karnataka	Moodabidri	Media Guard Technologies	Rajeev Gandhi complex main road Moodabidri - 574227	325909	Mr.Vishwas Kumar
Karnataka	Mysore	K.K.Marketing	1432/9, Tribhuvan Towers, opp Vetenary Hospital, Dewan's Road, Dhanwantri Road Cross, Mysore - 570001	4258613	Mr.Karunakaran.
Karnataka	Nipani	Manusoft Computers	Dumale Complex Chikodi road Nipani - 591237	222005 / 9448148005	Mr. Pavan / Mahesh Dumale
Karnataka	Raichur	Akshay Electronics	Shop No.2 Ground Floor, Hotel UMA Complex, Station Road, Raichur - 584101	225300	Mr.Narasimhlu
Karnataka	Ranibenur	Kruthika Communication	OLD LIC Building, Opp Gupta Petrol Bunk, PB Road, Ranebennur-581115	321444	Mr.Sujay
Karnataka	Shimoga	Chetan Electronics	C-5, Kenchappa complex, Durgigudi main road, Shimoga-577201	401889	Mr.Panduranga Rao
Karnataka	Tiptur	Shree Digital Solutions	Nanjappa complex, opp city union bank, BH road, Tiptur - 572201	9343813731	Mr.Ravi
Karnataka	Tumkur	Durga Communication	No.14 CMI Complex, Near Gayatri Therater, Below Navratna Silks & Sarees, B.H.Road Tumkur - 572101	2256184	Mr.Naveen Kumar
Karnataka	Udupi	Sanman Mobile Services	Shop No: 15, Simaz complex, Diana circule, Court road, Udupi- 576101.	3255770	Mr.Prakash
Kerala	Alappuzha	Getronics	FIRST FLOOR, KARTHIKA BUILDING, OPP SDV BOYS HIGH SCHOOL, COURT ROAD, ALLEPPY.	3290446	Mr.Omprakash
Kerala	Alathur	Marstek	12/950, Ground Floor, AR Complex, Opp. Munsiff's Court, Alathur, Palakkad Dt.- 678 541	321311	Mr. Rajesh. V.
Kerala	Aluva	Sed Infosys	BUILDING NO 12/57 DOOR NO 8, FIRST FLOOR, POOTHULLIL BUILDING, ALUVA - 683 101.	3235599	Mr.Sudheesh
Kerala	Attingal	AM Technologies	Mamam, Near Dreams Theater, Attingal	3290301	Mr.Saji
Kerala	Badagara	Amarkish Communications	1st Floor, Sarala Complex, Near KVR Motors, N.H. Bypass Road, Nut Street, Vadakara-673101.	3255756	Mr.Jeeju / Mr. Baiju
Kerala	Cherthala	Cherukattu Phones	Krishna Building, Opp govt boys high school, AC road, Chertalli	9388910703	Mr.Mahesh C D

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Kerala	Ernakulam	Guidelines	CC28/902, Ground Floor, Mundukottackal Estates, S A Road, Kadavanthara, Cochin-682020	4000113	Mr.Manoj G
Kerala	Ernakulam	Teletech Systems	20, First Floor, Penta Estate, above Airtel office, Janatha Junction, Palarivattom, Cochin-25	3207554	Mr.Sony Thomas
Kerala	Ernakulam	Zenicon Infocom(P) Limited	Above Syndicate Bank, Opp Cochin Shipyard, M.G.Road, Cochin-15	2359511	Mr.Jaimon Joseph
Kerala	Irinjalakkuda	Nice Mobiles	NICE BUILDING, ST. JOSEPH'S COLLEGE JUNCTION, IRINJALAKKUDA - 680121	3291515	Mr.Sebastian
Kerala	Kalpetta	Mobi Care	Ground Floor, Rawuthar Building, Opp. Vijaya Bank, Chungam, Kalpetta.	329366	Mr.Thanseer
Kerala	Kanhangad	XN Computers & Datacare	1st Floor, BENGACHERY COMPLEX, OPP:VYAPARA BHAVAN, T B ROAD JN, KANHANGAD.	3259755	Mr.Sandeep
Kerala	Kannur	Sahar Communications	SB-666-C & D, PRESTIGE CENTRE, GROUND FLOOR, SUB REGISTER OFFICE ROAD, KANNUR.	3258585	Mr.Ajai Abhiram
Kerala	Karunagapally	Supreme Enterprises	Opp to KSRTC Bus stand, Karunagapally-690518	2620282	Mr.Ratish / Premkumar
Kerala	Kasargode	XN Computers & Datacare	BENDICHAL COMMERCIAL COMPLEX, PRESS CLUB JN, MG ROAD, KASARGOD.	324755	Mr.Mr.Sandeep
Kerala	Kollam	Digital Infosystems	MC-3087, New Block, Bishop Jeromi Nagar, Chinnakada, Kollem-691001	2760647	Mr.Johnson Lawrence
Kerala	Kottarakkara	Sivashakthi Communications	KP-II/1574, Valiyavila Building, Near Marthoma Girls High School, Pulamon P.O, Kottarakkara	3298191	Mr.Suresh
Kerala	Kottayam	Svm Technologies	M.PM COMPLEX, Near Popular Maruti Show Room, M.C ROAD, S.H MOUNT, KOTTAYAM, KERALA- 686 006	2565303	Mr.Rajesh K S
Kerala	Kozhikode	Domain Systems & Services	17/1178E, 1st floor AL FAHAD, SABA school cross road, Putiyara, Kozhikkode	2722222 / 3243745	Mr.Mukundan
Kerala	Kunnamkulam	V Star Mobiles	ROOM NO 4/289/B2 2nd floor, City complex, Opp Tempo Park, Town Hall road, Kunnamkulam.	320009	Mr.Vijumon.K.V.
Kerala	Manjeri	Integrated Computer Systems	Royal Tower, TB Road, Manjeri - 676121	3299686	Mr.Thomason Chacko
Kerala	Mavelikara	Ettutharayil Agencies	GROUND FLOOR, KOIPPALLIL ROYAL ARCADE, PUTHIYAKAVU, MAVELIKARA-690101	3293340	Mr.Biji
Kerala	Palai	Cyriac TV Plaza	Vypana Building, Petta Road, Palai.	329746	Mr.Tom Cyriac
Kerala	Palakkad	Orion Techno Solutions	12/310/15, FIRST FLOOR, METRO COMPLEX, HEAD POST OFFICE ROAD, PALAKAD-678001	3200255	Mr.Khaja Hussain

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Kerala	Pathanamthitta	Melamparambil Agencies	10/264, Main Road, Town, Pathanamthitta - 689645	2223132	Mr.M.V.Francis Oommen
Kerala	Thalassery	Sahar Communication	44-1929, 1st Floor, MACKSON MONOR, OPP. PARIS RESIDENCY, LOGANS ROAD, THALASSERY	3208585	Mr.Ajai
Kerala	Thiruvalla	Sangeetha Electronics	524/17, Central Tower, Cross Junction, Thiruvalla	3203000	Mr.Ranjeev Kumar
Kerala	Thiruvananthapuram	Appolo Systems	Thelungu Chetty Complex, Shop No 23-24, Kalpalayam JN Karamana, Thiruvananthapuram 695 002.	2340523	Mr.Santosh
Kerala	Thiruvananthapuram	Smart Mobile	TC 2/3554(5), First Floor, Opp. Petrol Pump, Kesavadasapuram, Trivandrum-695004	3200105	Mr.Krishnakumar P B
Kerala	Thodupuzha	National Electronics	Shop No 5, Aswathy Shopping Complex, Temple Junction, Thodupuzha	220320	Mr.Aneesh M A
Kerala	Thiriprayar	Nice Mobiles	382J, 1st Floor, Century Plaza, N.H.17, Near Bus Stand, Thiriprayar	3240400	Mr.T.PSebastian
Kerala	Tirur	Telit Telecom Shop	GROUND FLOOR, AL AMAL COMPLEX, PAN BAZAR, TIRUR	3295623	Mr.Vasan.K.Nair
Kerala	Trichur	Cell Tech	Shop No 5/2, TC23/326, N.P.Tower Guruvayoor Road, Near Bindu Theatre, West Fort, Thrissur.	2387386	Mr.Santom Kalloor
Kerala	Vaikom	Vaikundam Electronics	II/ 214C, Mannamkeriel Complex, Bus stand Road, Valiyakavala, Vaikom	326616	Mr.Sreekumar.G
Madhya Pradesh	Balaghat	Shri Computers	Keshar Plaza Complex, Hanuman Chowk, Balaghat	9300632132	Mr.Deepak Bajaj
Madhya Pradesh	Betul	Shivam Electronics	Jiaprakash Chowk, Kothi Bazar, Auto Stand, Betul - 460001	9329099071	Mr.Vikram Motwani
Madhya Pradesh	Bhopal	Akansha Enterprises	25-26, CENTRAL MARKET, ROSHANPURA SQUARE, BHOPAL MP	7553201626	Mr. Dinesh Asija
Madhya Pradesh	Bhopal	GSM Solution	M-2 CHETAK COMPLEX, ZONE -2 M.P NAGAR	4229213	Mr.Neeraj
Madhya Pradesh	Bhopal	Music Mahal Bhopal	SHOPNO.1 NEW MARKET NEAR HANUMAN MANDIR, BHOPAL	5220725 / 2579178	Mr.Shinu
Madhya Pradesh	Chindwara	Bunty Photoelectronics	Shop No.33, Jiji Bai Complex, Parasia Road, Chindwara	230358	Mr.Ritesh Shukla
Madhya Pradesh	Dewas	New Taj Electronics	4, New Market, Moti Bunglow Main Road, Dewas	220005	Mr.Shabbir Shaikh
Madhya Pradesh	Guna	Mobile Junction	Jai Stambh Chauraha, Nr:Central Bank, Guna-473001	329277	Mr.Deepak Arya
Madhya Pradesh	Gwalior	Galav Computers	Ground floor, Ganpati Plaza, City Centre, Gwalior	4013311	Mr.Pradeep Dixit
Madhya Pradesh	Gwalior	Versha Sales & Service-Asp	GROUND FLOOR SARAFA BAZAR LASHKAR, GWALIOR	4060444	Mr.Ajit Kumar
Madhya Pradesh	Indore	Ayushi Electronics	UG-10, Ratnamani Complex, 7/1, New Palasia, Indore-452001	3251284	Mr.Santosh Dwivedi

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Madhya Pradesh	Indore	IT Customer Care	UG- 11, B. M TOWER, OPP. LOTUS, SAPNA SANGITA ROAD, INDORE	3207283	Mr. Sanjay Dhankar
Madhya Pradesh	Indore	Pioneer Marketing	Prem Trade center Opp.Gujarati Girls collage, Indore	4006503	Mr.Ritesh
Madhya Pradesh	Itarsi	S.S. Telecommunications	Vijayshree Complex 5, Line Sarafa Bazar, Itarsi - 461111	9300272505	Mr.Akilesh Saxsena
Madhya Pradesh	Jabalpur	Sri Sai Communication	C/O MUSKAN CARD GALLERY, 766, SHAHID SMARK MARG, NEAR RANITAL SQUARE, JABALPUR-482001	4046831	Mr.Mohit Sareen
Madhya Pradesh	Jabalpur	I T Solution	Opp Dr.Grover Hospital, Gate No-3, Wright Town, Jabalpur	4014064 / 4064370	Mr.Sanjeev Choubey
Madhya Pradesh	Katni	Excellent Infosys	20/306, Gurunanak Road, Katni	406047	Mr.Prafful Agrawal
Madhya Pradesh	Khandwa	Naman Refrigeration	TAPAL CHALL, KHANDWA	2230089	Mr.Yashwant Mali
Madhya Pradesh	Mandsaur	Sky Link Mobile Services	Payas Ice Cream Parlour, 16, Opium Godown Road, Nai Abadi, Mandsaur 458001 (M.P.)	243978	Mr.Gaurav B. Mittal
Madhya Pradesh	Morena	Mobile Plaza	M S ROAD, JIWAJI GUNJ, OPP BANK OF INDIA, MORENA	400886	Mr.T C Shivhare
Madhya Pradesh	Neemuch	Shree Balaji Mobiles	Jain Bhavan Road, Near Ganganagar Off., NEEMUCH (M.P.)	320033	Mr.Savesh Goyal
Madhya Pradesh	Ratlam	Kirti Telecom	124 Station road Opp.Raj Tower, Ratlam - 457001	239346	Mr.Kirti Jain
Madhya Pradesh	Sagar	Neeta Computers	Hanuman Mandir Gali 5, Civil Lines, Sagar -470001	329951	Mr.Ramesh Gupta
Madhya Pradesh	Satna	Akashwani Agencies	OPPCMA SCHOOL, SHOP NO.2, ANNAM CHHAYA, REWA ROAD	416455	Mr.Ajay Sukhramani
Madhya Pradesh	Satna	Maa Shaarda Communication	Gali No1, C/o Shri Gopal Sharan Singh, Pushp Raj Colony, Satna	7672320797	Mr.Prashant Singh
Madhya Pradesh	Shivpuri	Ocean Computer Corporation	Ist Floor, Vishnu Mandir Market, Near Panipat Handloom, Shivpuri	225505	Mr.Sameer Saxena
Madhya Pradesh	Ujjain	Galaxy Computers & Communication	43/2, Varruchi Marg, Opp Madhav Nagar Police Staion, Freeganj, Ujjain	2515995 / 253999	Mr.Anurag Chhajhlani
Maharashtra	Ahmednagar	T V Spot	B-3, ADARSH SAMRUDHI, NR. CHOUPATI, KARANJA-414001	2326267	Mr Anil Apte
Maharashtra	Akola	Supra Computers	Ushakiran Complex, Shastri Nagar, Opp. Hotel Surya, Akola.	9326866469	Mr.Prashant
Maharashtra	Amravati	Scorpio Services	Shop No. 84, Ground Floor, Gulshan Towers, Nr. Panchasheel Cinema, Amrawati, Pin-444601	2567302	Mr. Pramod
Maharashtra	Aurangabad	Electronics World	Sahyadri Building, opp. To Shivaji School, Khokadpura, Aurangabad-431001	6454532	Mr. Rauf

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Aurangabad	Unique Telematics	SHOP NO. 108A, FIRST FLOOR, 'TAPADIYA SUPAR' MARKET, NIRALA BAZAR, AURANGABAD -	2356447	Mr.Mahesh
Maharashtra	Beed	Shree Enterprises	Behind Raj Hotel, A H Wadia vachnalay rd, Beed	9373701010	Mr. Rajiv Joshi
Maharashtra	Chalisgaon	Mobile Point	SHOP-22, MOMAYA COMPLEX, NEAR BUS STAND, CHALISGAON	9372712777	Mr. Dashrath Vaishnav
Maharashtra	Chandrapur	Shiv Communications	Ramnagar, Near Durga Mata Mandir, Sindhi Colony, Chandrapur-442 401	329546	Mr.Mahesh
Maharashtra	Chinchwad (Pimpri)	Ritz Communication	Shop No 10, "A" wing, Jai Ganesh Vision, Next to Hotel Neelkanth, Near Fam Multiplex, Akurdi, Pune-411033	27485613 / 32661900	Ms Nikita
Maharashtra	Dhule	Pearl Communications	Shop no 3, CKB arcade, Near Devpur Bus stand, Agra rd, Dhule	324666	Mrs. Sonu Atul Bang
Maharashtra	Gondia	M/S V2 Care	Opp. Cofee house, Railtoli, Gondia 441614	329322	Mr. Krishna Sargam
Maharashtra	Hatkangale (Ichalkaranji)	Sai Vision Services	11/236 MOHAN ARCADE SHOP NO B14, STATION ROAD, TAL-HATKANGALE, CITY-ICHALKARANJI-416115	2439989	Mr. Sameer Bhonsale
Maharashtra	Islampur	Solar Shoppy	Kachare Lane Islampur, Distt Sangli	9326777603	Mr. D.H.Patil
Maharashtra	Jalgaon	TelUs Associates	Shop No 16, 'G' Wing 1st Floor, Near Tarun Bharat Office, Golani Market, Jalgaon Maharashtra.	9370164545	Me. Shaikh
Maharashtra	Jalna	Megha Multi Serices	Shop no 04, A wing, Udhan complex, Jalna	9326201408	Mr. Narendra Kulkarni
Maharashtra	Kolhapur	Sms Services	S5, Diwan Tower, Opp. Nutan Marathi School, Near Mirajkar Tikky, Kolhapur, Pin -416005.	2541120	Mr. Prakash Patil
Maharashtra	Kopergaon	Om Sai Mobile	Opp. ST Bus Stand, Daharngaon Road, Kopergaon, Dist Ahmednagar.	9373295009	Mr.Mahendra Devkar
Maharashtra	Latur	Hindustan Mobiles Services	Side no, 111, Shop 59, 49 Gandhi Market, Near Bhalchandra Blood Bank, Latur-413512	641111 / 982345500	Mr. Sandeep Parande
Maharashtra	Malegaon	Cell Care	Shop no 59, SR no 57, New Islampurm, Malegaon	9326211996	Mr Ansari Mohd Israfil
Maharashtra	Mumbai	Cyber-Gyan Convergence & Services (India) Pvt. Ltd.	43/44, Gold Filled Plaza, Sion Bandra Link Road, Sion, Mumbai-400017	24075939	Mr. Jatin Parekh
Maharashtra	Mumbai	G.PElectronic	Shop No 6 Ambika Cooperative Housing Society, Jawahar Nagar Road No 2, Near Railway Crossing, Goregaon West, Mumbai 400062	2232633960	Mr.Mayur

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Mumbai	Grace Tele Services	Shop no 3, C/1, Manik Nagar Soc, Punjabi lane, Borivali (W), Mumbai 400092	32455033	Mr. Daniel
Maharashtra	Mumbai	Komplex Telecom Corporation	Shop no.A/19, Nootan Nagar Premises Co. Op. Hsg. Society, Near Bandra Rly. Stn., Towards Bandra Talav, Turner Road, Bandra (West) Mumbai 400050	64147153	Mr. Sutar
Maharashtra	Mumbai	LG Service Centre	Shop No.1, 2, 3 Ground Floor, Rajakamal Bldg, Opp.Ram Mandir, Subhash Road, Vile Parle(E) Mumbai 400 057	26134917	Mr. Rakesh / Omkar
Maharashtra	Mumbai	Paras Telecom	2nd floor, Rear Side Capital Cinema Building, Wauddy Road, Opp. Mumbai CST Railway Station, Mumbai	65279042	Mr. Ravindra
Maharashtra	Mumbai	Sai Tele Services	A-110, Satyam Commercial Complex, M.G.Road, Ghatkoper (E), Mumbai - 400 077.	40111264	Ms. Isha
Maharashtra	Mumbai	Sierra Mobiles	Opp Prabhu Darshan, L.J.Road, Shivaji Park, Near Shiv Sena Bhavan, Mumbai 400016	24382200	Mr. Anurag
Maharashtra	Mumbai	Trident Communications	8-A, Vasant Smruti, Dadasaheb Phalke Road, Beside "BharatKhsetra Building," Near Dadar station(E), Dadar -East, Mumbai - 400 014.	65047270	Mr. Kalpesh
Maharashtra	Mumbai	Yash Telecom	Dadarkar Tower, Shop no.1, Opp.Film Centre, Near Crossroads, Tardeo, Mumbai - 400 034	23522702	Mr.Girish
Maharashtra	Mumbai	KBs Communications	Shop No.2A, Maharashtra Seva Sangh, Near Apna Bazar, Nehru Road, Mulund (West). Mumbai-400080.	32107410	Ms. Harsha
Maharashtra	Nagpur	Epoch Services	Shope No. UG-9, Bhakati Vihar Complex, Chapru Nagar Square, Lakadganj, Nagpur -440008	3246777	Mr. Girish
Maharashtra	Nagpur	Shivatronics	B-31 Sai Regency Complex Ravi Nagar Square Nagpur Maharashtra 440044	9300892579	Mr. Ravi Gupta
Maharashtra	Nagpur	Spectrum Marketing	Shop No.2, Dharampeth Towers, West High Court (WHC) Road, Dharampeth, Nagpur - 440010	22527823	Ms. Sonali
Maharashtra	Nanded	Devansh Microtronics	Beside Forest office Nr. Ranbidkar Resi.Nanded	249789	Mr. Prashant Palnate
Maharashtra	Nasik	Mobs Associates	SHOP NO. 8A, FIRST FLOOR, 'KAPOTE-MEHER' MARKET, RENUKA NAGAR, WADALA NAKA, DAWRKA, NASIK	6523613	Mr. Alim Kazi
Maharashtra	New Mumbai	Beekeyen Enterprises	Block No 1, Shop No. 17, Mahaveer Milan, Sector 28, Near Blue Diamond, Hotel, Vashi, New Mumbai	65114304	Mr. Shailesh
Maharashtra	New Mumbai	LG Service Centre- Dakc	H Block, Ground Floor, Dhirubhai Ambani Knowledge City, Navi Mumbai-400709	30386032	Mr. Sachin

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Panvel	Oceanic Tele System	Shop No. 3, Sai Arcade, Sector 15, New Panvel (E), Dist. Raigad.	9322217221	Mr. Chetan
Maharashtra	Pen	Skyphone Enterprises	SHOP NO 3, SHREE COMPLEX, OPP UNIQUE BAZAR, PEN KHOPOLI ROAD, PEN, DIST RAIGAD-402107	9373435000	Mr Kuldeep
Maharashtra	Pune	Horizon	32A, Lotus Court, Near Hotel Panchami, Pune Satara Road, Pune.	32501222	Mr. Nilesh Pundye
Maharashtra	Pune	Microchip Solutions	Akshay Chambers 216 Naryan Peth, Near Bhide Bridge, N C Kelkar Rd, Pune-411030	24471155	Mr Mahyesh Bhosale
Maharashtra	Pune	Mobile World	G-25, AKSHAY COMPLEX, DHOLE PATIL ROAD, PUNE-411 001	30942268	Mr.Pawan Mantri
Maharashtra	Pune	Viki Info Technologies	Shop No4, Amit Complex, 474, Sadashiv Peth, Opp New English School, Tilak Road Pune Maharashtra	24434134 / 9322206000	Mr.Vivek Surve
Maharashtra	Ratnagiri	S P Electronics-Pune	shop no-19, Parasmani Complex, K C Jain Nagar, Nr Maruthi Mandir, Ratnagiri-415612	329556 / 221982	Mr.Santosh Prabhu
Maharashtra	Sangamner	Rajpal Telecom	Yashodhan complex, New Nagar Rd, Near hotel Chaitali, Sangamner	320888	Mr Harish Rajpal
Maharashtra	Sangli	Ramesh Electronics	Dr. G. S. Joshi Banglow. Opp. B.Ed Collage, Rajwada, Sangli., Tq. Miraj, Dist:- Sangli.	2327601 / 09322107601	Mr. Suresh Shegane
Maharashtra	Satara	Shivkal Mobilink	173/6/7 Raviwarpeth shop no-11, Vithal Lila Complex, Powai Naka, opp Janta Bank, Satara-415002	325212	Mr. Mahesh Shinde
Maharashtra	Shrirampur	Siddharth Infocom	Shop No 1, Hotel Sidhartha Building, Sidhartha Stop, Sagamaner Road, Shrirampur-413709	9326611445	Mr. Kedar Fargade
Maharashtra	Solapur	Atharva Electronics Pun	940/2 NORTH SADAR BAZAR, GARUD BUNGLOW, SOLAPUR-413003	2317595	Mr. Umesh Kamalapurkar
Maharashtra	Solapur	Jawaharlal Radio Service	184, Gold Finch Peth, nr Hotel Ritesh, Solapur - 413007.	2725030	Mr. Prasanna J Chavan
Maharashtra	Thane	Ekadant Corporation	Shop No1, Ground Floor, Laxmi Smruti CHS, Opp Bal Ganesh Temple, Near Makhmali Talao, Edulji Road, Charai, Thane (W) 400602.	32130222	Mr. Paresb
Maharashtra	Thane	E-Link Solutions	Shop No.5, Type C, Bldg no.5/6, Shanti Vihar, Mira Road -E	9322839386	Mr.Omkar
Maharashtra	Kalyan	Sky Lark Associates	Shop:1, 'A' Wing, Suresh Tower Co-op. Hsg. Soc, Opp. Municipal Vegetable Market, Santoshi Mata Road, Kalyan (W)	3209899	Mr. Pravin
Maharashtra	Bhiwandi	Varad Electronics	SHOP NO2, PRABHU CHAYA BLGD, PRABHU ALI, NEAR OLD GOVT. HOSPITAL, MANDAI, BHIWANDI, DIST THANE	222653	Ms. Swati
Maharashtra	Vashi	Beekeyen Enterprises	Block No 1, Shop No. 17, Mahaveer Milan, Sector 28, Near Blue Diamond, Hotel, Vashi, New Mumbai	65114304	Mrs. Kartiki

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Virar	Siddhivinayak Tele Services	Shop no 5&6, Vishnu Prasad Complex, Opp Utkarsha School, Near S.T. Bus stand, P.P. Marg., Virar (West)	3258111	Mrs. Vaishali
Maharashtra	Wardha	Libra Electronics	C/o Anand Opticals, Soshalist Chowk, Main Road Wardha Maharashtra-442001	2242109	Ms.Manjusha
Maharashtra	Yavatmal	Combine Electronics & Services	Shop No 13, 1st floor, Old Indira Gandhi Market, Azad Maidan Road, Yavatmal-445001	9822200166	Mr. Ajay Shukla
Maharashtra	Yavatmal	I T Services	Nr datey college, C/o Yahoo cyber cafe, Yawatmal 445001	9372610121	Mr.Umeh Gadwe
Maharashtra	Yavatmal	Star Electronics	Near Shyam Talkies Ram Mandir Road Yavatmal Maharashtra 445001	2324106	Mr.Snajay Chabda
Meghalaya	Shillong	Rhapsody Care	E N COMPLEX, G.S. ROAD, Below Town Pharmacy	2547946	Mr.R.R Wazi
Orissa	Anugul	Creative Solution	Hanuman Bazar, Near gundicha mandir, Angul-759122	329207	Mr Tapas Sahu
Orissa	Balasore	Raghunath It Solutions	Azimabad, Proof Road, Balasore.-756001	329267	Mr.Sujit Kr Sen
Orissa	Berhampur	Rashmi Electronics & Computers	Shop No.19, Sai Complex, Main Road, Gandhi Nagar, Berhampur, Orissa	3290409	Mrs. Rashmi Ranjan Sharma
Orissa	Bhadrak	A B Associates	Nr.Rliance Web World Express, Bypass Road, BHADRAK-756100	9337040450	Mr. Kartik Chandra Rout
Orissa	Bhubaneswar	Miracle Services It Extn.	Plot No. 136, Fr. Lane of Vigilance Office, Beh. Passport Office, Surya Nagar, BBSR.	2532383	Mr.Chaco/ Suprava
Orissa	Bhubaneswar	S.A.Infosys	291.Bomikhal, Opp.Akamra cinema hall, Bhubaneswar-751010	2573114	Mr. Ashwini K Sahoo
Orissa	Cuttack	O.A.Infotech	Behind Govt Bus Stand, Badambadi, Cuttack -753012	9338912613	Mr. Arabind Rout Ray
Orissa	Puri	Bajinath Infocomm	At Muncipal Mkt, Grand Road, Puri-752001	9337032005	Mr.Ajay/ Sandeep Agrawal
Orissa	Rourkela	Infosys	13, Bisra Road, subhadra complex Opp.Choudhary Petrol Pump, Rourkela	9337403999	Mr. Arun Ghosh
Orissa	Sambalpur	A.N.Communication	Inf. Of Zilla School, Pensionpara, Sambalpur-768001	9337660919	Mr. Md. Abdul Aziz
Punjab	Amritsar	Bajaj Telecommunication	87, G Floor, Nehru Complex, Lawrence Road, Amritsar-143001	3258599	Mrs.Suman Bajaj
Punjab	Barnala	Unique Infotech	Mittal Street, Near M C Office, Barnala-148101	238007	Mr.Pankaj Goyal

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Punjab	Batala	Dream Services	Shop No 111 Opp Improvement trust office, Dharamsingh Market, Batala.	9316676018	Savdeep Singh
Punjab	Bhatinda	Lalli's Electronic Gallery	1139-A, First Floor, Amrik Singh Road, Nr Gole Diggi, Bhatinda-151005	2239500	Mr.Ashok Kakria
Punjab	Chandigarh	New Tech	SCO 495/496 SEC 35C First floor	9814244862	Mr.Pawan
Punjab	Chandigarh	Vignesh Services	S.C.O- 189-90, Sec- 34, Chandigarh	3018028	Mr.Mukesh Arya
Punjab	Hoshiarpur	Kuldip's Mobile Care	Dhobian Wali Gali, Phagwara Road, Hoshiarpur-146001	226906/ 2232906	Mr.Kuldip
Punjab	Jalandhar	Mobile Center	233/1, Saheed Udham Singh Nagar, Backside Hotel Preet, Nakodar Road, Jalandhar-144001.	3292666	Mr.Vikas Sangar
Punjab	Kapurthala	Arun Electronics	217, C Block, Jama Masjid, Shoping Complex-144601	329254	Mr.Arun Khosla
Punjab	Kotkapura	Om Mobile Service Centre	1ST FLOOR DHANU RAM PANSARI, Railway Road-151204	223069 / 9815759239	Mr.Rohit Mittal
Punjab	Ludhiana	Anant Shree Comp	19K Opp PAU Gate no 1 Ferozpur Road	3245386	Ms Monia chaudhary
Punjab	Ludhiana	Shahi Communication	Shop No.5, Revolving Restaurent 4X International, 583 L, Model Town, Ludhiana	3244190	Mr.Amit Shahi and mr.vimal
Punjab	Malaut	Khurana Mobile Solution	SHOP NO 7 OPP, NEW TELEPHONE EXCHANGE G T ROAD MALUAT PIN NO = 152107	9316940003	Mr.Ramesh Khurana
Punjab	Malerkotla	Prime Infocomm	Opp. Main gate, Govt College, MalerKotla-148023	253899	Mr.Rohit Bansal/ Raj Verma
Punjab	Mandi Gobindgarh	Aditya Infocom	Main Iron Market, custom and exise office Mandi Gobindgarh	326896	Mr.Naresh Aggarwal
Punjab	Mansa	Sharma Telecom	Cinema Road NAGINA MARKET OPP:PARKASH BOOK DEPOT, Mansa	9316173009	Mr.Udesh Kumar Sharma
Punjab	Moga	Rashpal Telecom	6, Red Cross Road, Court Road, Near Old Court, Moga-142001	222468	Mr. Rashpal Singh
Punjab	Nabha	Echo Telecom	Opp. Milan Palace Circualr Road. NABHA 147201	504501	Mr.Girish Garg
Punjab	Nawasher	Kapoor Electronics	Kothi Road, Opp Kumar Hotel, Nawashahr-144514	508085	Mr.Narender Pal
Punjab	Pathankot	Leo Comp	Near Tourist hotel, military ground, Pathankot	9814586406	Mr.Mr Kamal
Punjab	Pathankot	Touch Infosys	189 Opp. Guru Nanak Park, Model Town, Pathankot.	3290300	Mr.Navdeep Singh Bedi

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Punjab	Patiala	Image Services	Shop No.84, First Floor, Leela Bhawan Opp Punjab National Bank, Patiala-147001	2222796 / 9872281524	Mr.Rohit Bansal
Punjab	Phagwara	Bansal Telecom	G T Road, Railway Road Chowk Near Connect Office, Phagwara-144401	461321 / 9888005339	Mr.Mangalesh
Punjab	Rajpura	M K Enterprises	Shop no.6, Gurudwara Singh Sabha Market, Rajpura Town-140401	2652569	Mr.Johny
Punjab	Ropar	Arora Communication	Shop No.1, Lehari Shah Mandir Road, Ropar	9872363032	Mr.Amit Arora
Punjab	Samana	Sangam Mobile Care	Tehsile Road, Near Garg Laboutry	505648	Mr.Vaneet Kumar
Punjab	Sangrur	National Computers	SUNAMI GATE, Near Guru Nanak School, SANGRUR PIN NO = 148001	233335 / 9814586196	Mr.Sarabjit Singh
Punjab	Sarhind	A.S. Infocom	Grain Market, Cinema Road Sirhind City-140406	500726	Mr.Jaspreet Singh
Rajasthan	Ajmer	Nehal Infotech	F-3, FIRST FLOOR, AMAR PLAZA, Opp. DAULAT BAGH, AJMER-305001	3291404	Mr.Suresh Sharma
Rajasthan	Ajmer	Prangan	112/10, Civil lines, Ajmer	9828503092	Mr.Pareek
Rajasthan	Alwar	R.K.Telecom	SHOP NO.112, FIRST FLOOR, GANPATI TOWER NEAR NANGLI CIRCLE, Alwar	9351390057	Umesh sharma
Rajasthan	Beawar	Srikrishna Infocom	Chaoni Road, Bhagat Chauraha, Near Roadways Bus Terminus, Beawar	329675	Mr. Dheerendra Agrawal
Rajasthan	Bhilwara	Ajanta Communications	No3, Bapna Complex, Pur Road, Bhilwara	329549	Rafiq
Rajasthan	Bikaner	Tech Solutions	1st Floor, 222 & 223, Ganpati Plaza, KEM Road, Bikaner	3292423	Mr.Aziz/Vika
Rajasthan	Chittorgarh	Arihant Infotech	A46, Meera Market, Near Rajasthan Patrika Office, Chittorgarg-312001	325933	Mr.Abhishek
Rajasthan	Chomu	Tambi Telelink	Kotwali chabutra, dhan ji ki gali, Sadar Bazar Chomu-303702	9314090400	Mr.Anup Tambi/ Dp Saini
Rajasthan	Dholpur	Tirupati Telecom	14, Bhagwati Market, Near Jagan Cinema hall, Jagan Tiraha, Dhoulpur	9314014093	Mr.Moshin/ Devender
Rajasthan	Jaipur	Alpha Infotech Systems	F-1, First Floor, Krishna Mall, Lakshmi Mandir Crossing, Tonk Road, Jaipur-302015	3299724	Shatrugan mangal
Rajasthan	Jaipur	Alliance Communication	G6, City plaza, Space Cinema Hall, Jhotwara Road, Jaipur-16	9351371549	Amit/Bhushan
Rajasthan	Jaipur	Solution Computers	Plot No.4 Krishna Nagar StationJanpath Near Hotel Paradise Jaipur	5106388	Mr.Dhreej Mathur
Rajasthan	Jhunjunu	M S Mobile Point	Kaswan Complex, Opp Roadways Bus Stand, Jhunjunu	9314011951	Mr.Abhshek / Mr.Sunil
Rajasthan	Jodhpur	Omega Electronics	Plot No.196 SS Tower, AkhaliyaChowraha Jodhpur-342003	3291214	Mr.Pratap Singh

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Rajasthan	Kishangarh	Capital Enterprises	5, Radha Krishan market, Opp. Sardul school, Kishangarh-305801	326550	Mr.Shatrrugan
Rajasthan	Kota	Cyber Infosystems	26, Ground floor, Kalawati Paliwal market, Gumanpura, Kota-324007	2392153	Mr Rajnish
Rajasthan	Kota	Saya Electronics	1-TA-16, Vigyan Nagar, Kota	9828503246	Mr.Lalit
Rajasthan	Kotputli	Isha Communications	11, ground floor, Govardhan plaza, Nehru Bazar, Kotputli	9314140001	Mr.Vijender
Rajasthan	Nagaur	Jam Appex	Shop num.7, Opp. Old power house Ram Poll, Station road, Nagaur	329595	Mr.Amit
Rajasthan	Nathdwara	Geniune Infotech	Shop num.10, Suriya apartments, Opp.Vandana talkies, Bus stand, Nathdwara.	329208	Mr.Gajender/Mr Ashwini Purohit
Rajasthan	Pali	Mansi Mobile	9, Vasant Vihar, Opp. Bangur college, Pali-306401	9352766555	Mr.Abhishek
Rajasthan	ShrigangaNagar	Telecare Servcies	33, J Block, Near Birbal Circle, SriGanga nagar	3207687	Abhishek
Rajasthan	Sikar	Rita Computers	Shop No.4, Kabra Market, Shramdan Marg, Sikar-332001	329320	Mr.Saurav Chakravarthy
Rajasthan	Udaipur	Shree Telelink	31, First floor, Indra prasth complex, Delhi gate, Udaipur-313001	3261777	Tanujay Jain
Tamilnadu	Ambasamudram	A to Z Communications	63-D, KNV Complex, Santhai Bazaar, Ambasamudram -627401	251143	Mr Raja Selvakumar
Tamilnadu	Arkonam	G.M. Marketing	NO.3/4, SUBURAYAN STREET, ARAKKONAM-631001	231395	Mr.Mr.P.Gajapathi
Tamilnadu	Arni	Digitech Computers	Shop No. 201/82- B1, SM Road, Arani - 623101	223929	Mr.D.Mohan Ram
Tamilnadu	Aruppukottai	The Mercury Computers	607, MADURAI ROAD, NEAR NEW BUS STAND, ARUPPUKOTTAI-626101	222552	Mr. R. Boominathan
Tamilnadu	Attur	V.R. Net	V.R.Net, Dr.Arumugam complex, salem main road, ATTUR	243585	Mr.Senthil Kumar
Tamilnadu	Batlagundu	Karthik Communications	No 221, Main Road, Batlagundu- 624202	9360019090	Mr Lakshmanan
Tamilnadu	Bhavani	Sri Abirami Electronics	2E, Pavadi Street, Anthiyur Corner, Bhavani-638301	230919	Mr Balamurugan
Tamilnadu	Chegalapatu	SKB Electronics	No-42 Devarajanar pillai Street, Vedachalam Nagar, Chengalpet	37406080	Mr.Balaji
Tamilnadu	Chennai	Genesis Communication	63/3, First main road, Gandhi Nagar, Adyar, Chennai-600020	24401188	Mr Suresh
Tamilnadu	Chennai	GS Systems	547/352, F M Towers, Mount Road, Nandanam, Chennai-6000035	24330889	Mr.Nicholus
Tamilnadu	Chennai	Sabisu	B2, Golden Enclave, New 275, Old 184, Poonamallee High Road, Kilpauk, CHENNAI 600 010.	26612347	Mr.Palani
Tamilnadu	Chennai	Unicare Infocomm Services	No.293, Arcot Road, Next to Indian Overseas Bank, Kodambakkam Chennai - 24	24724666 / 52047059	Mr.Kartik
Tamilnadu	Chennai	Garage De Telecom	OLD No:30: NEW No:10, KMBF BUILDING, 1ST FLOOR, DURAISAMY ROAD, NEAR POTHYS, T.NAGAR, CHENNAI 600017	28143454	

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Chidambaram	Future Tech	Hasan Towers, 1st Floor, No. 14, V.G.P.Street, Near Hotel Ritz, Chidambaram	222150	Mr.Shaker
Tamilnadu	Coimbatore	Classic Electronics	No 1/1, Alagappa Road, 6th St, Tatabad, Coimbatore - 640012	4374875	Mr Arivazhagan
Tamilnadu	Coimbatore	Fast Track	138-C, TV Swamy Road (West), RS Puram, Coimbatore - 641002	2551155	Mr Anand
Tamilnadu	Coimbatore	Nucom Services	3/61, Master Building, Kattoor Road, Pappa Naicken, Palayam, Coimbatore - 641037.	4351569	Mr.Uthaman
Tamilnadu	Cuddlore	Kasturi Cellular Service	NO: 37 (2C) BHARATHI ROAD, CUDDALORE. 607 001, CUDDALORE DISTRICT, TAMIL NADU.	220183	Mr Raghupati
Tamilnadu	Cumbum	LG Mobile Service Gallery	No 52, Gandhiji Street, CUMBUM-625516	320800	Mr.Senthil Kumar
Tamilnadu	Dharapuram	IT Zone	40-A-1, Bye Pass Corner, Dharapuram-624202	329293	Mr Ramakrishnan
Tamilnadu	Dharmapuri	Calrity Digital Photo&Audio	98/29C KANDASAMY VADIYAR STREET, DHARMAPURI, 636701	329707	Mr.Raj Murughesan
Tamilnadu	Dindigul	Padma Electronics	15, Dudley high School, Dindigul	9367927080	Mr. Murali Chandra
Tamilnadu	Erode	Jans Electronics	29, Sathy Road, Near Hotel Oasis, Erode - 638004	3258526	Mr Kannan
Tamilnadu	Gobichettipalayam	Best Electronics	47a/1, kms complex kacherry medu, gobichettipalam	225598	Mr.G.A.Jayakumar
Tamilnadu	Hosur	Suryas Will Of People	R S Towers, Opp Traffic Police Station, Bangalore By Pass Road, Hosur-635109	246687	Mr.Shanmugam
Tamilnadu	Kallkuruchi	New Magestic Cell Sales&Service	OPP TO TELEPHONE EXCHANGE, GANDHI ROAD KALLAKURICHI	228270	Mr. Murugesan
Tamilnadu	Kanchipuram	Classic Mobile Care Centre	Door No.67-A, (Shop No.5), P.S.K. Street, Kancheepuram-631 501	9345636900	Mr.Damodaran
Tamilnadu	Karaikal	Shree Harini Cellulor Service	OPP. TO NEW BUS STAND, BHARATHI MAIN ROAD, KARAIKAL-609602	320544	Mr. K. Selvaganapathy
Tamilnadu	Karaikudi	Sitiyes Electronics	10 A / 3, Muthulakshmi Complex, Opp to Income Tax Office, Sekkalai, Karaikudi - 630002	9362611455	Mr. S. Veerapandiyan
Tamilnadu	Karur	Aswathi Electronics	No 90 / 102, Old Bye pass Road, Karur-639001	9843045555	Mr Satish Kumar
Tamilnadu	Kovilpatti	St.Marys Cellphones	No.6, Rajakumari Towers, AKS Theater Road, Kovilpatti	9360533649	Mr.Iyyappan
Tamilnadu	Krishnagiri	Madura Care Centre	No 361, Crown Complex, Bangalore Main Road, Krishnagiri-635001	9364258223	Mr Suresh Kumar
Tamilnadu	Kumbakonam	Fargan Electronics	NO.5 VRS COMPLEX, HAJIAR STREET, KUMBakonam- 612001,	2401123 / 3290303	Mr. Surbudeen

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Kuzhithurai	Mobile Care	Shop no 211 , SM Arcade, Main Road, Marthandam, Kuzhithurai - 629165	270587	Mr Surendra Kumar
Tamilnadu	Madurai	Devaa Electronics	No.4, Thirumakulam North Street, Near Ayyappan koil, Thhallakulam, Madurai-625002	4360995	Mr. Guna
Tamilnadu	Mayiladuthurai	Nrs Mobile City	NO-28 - C/14, R.R.COMPLEX, MAILADUTHURAI	223277	Mr Abdul Rahim
Tamilnadu	Nagercoil	Redeemer Electronics	Shop no 2, Pillars Gate, Balamore Road, Nagercoil-629001	327788	Mr.Dinkar
Tamilnadu	Namakkal	V.R Care	77/2, Veera Vilas, Trichy Main Road, Namakkal - 637001	329304	Mr. R. Vijayalakshmi
Tamilnadu	Ooty	Mountain Cell Com	NO:302, Band lane, Commercial road, Near Liberty Theatre, Ooty-643001.	2443787	Mr.Sujith & Miss Geetha
Tamilnadu	Palani	Hi-Tech Electronics	No.76, New Dharapuram Road, Opp. ICICI Bank, Palani - 624601	320264	Mr. R. Ramachandran
Tamilnadu	Paramathy Velur	Vishwak Mobiles	No 5, KK High School Building, 98, High school Road, Paramathy Velur - 638182	224348	Mr Mohan
Tamilnadu	Pattukottai	Mobile Care	127, BIG STREET, PATTUKOTTAI	9842653921	Mr.Arul Alagan
Tamilnadu	Perambalur	The Best	Vivkanand st., M.P. office opp., Perambalur	275717	Mr.PKumar
Tamilnadu	Perundurai	Sree Baby Electronic	483 mainroad, perundurai	221800	Mr.Shiva Balan
Tamilnadu	Pollachi	Star Mobiles	SHOP NO. 5 Ground Floor, Vasanth Complex, Immamkan Street, POLLACHI.	222230	Mr.Senthil Kumar
Tamilnadu	Pondicherry	Digital Logistics	126/2, Perumal Koil Street (Bharathi Street Cutting), Pondicherry-605001	4210148 / 9843093348	Mr.G Singaravelu
Tamilnadu	Pondicherry	Balaji Electronics	No:21 , 3rd CROSS STREET, Annanager, PONDICHERRY,	3090414	
Tamilnadu	Ponneri	Sri Balaji Mobile Care Center	NO, 26, THALUKKA OFFICE ROAD, PONNERI, THIRUVALLUR DIST-601204	27973381	Mr.Balaji
Tamilnadu	Port Blair	Universal Service Care	R.G.T. ROAD, PORT BLAIR, ANDAMAN-744101	329588	Mr.Naveen
Tamilnadu	Pudukottai	Yem Kay Electronics	2, Subabharathi complex, 5378, 79, Alangudi Road, Pudukottai-622001.	9344038441	Mr.Rajesh Kannan
Tamilnadu	Rajapalayam	Sri Vignesh Mobiles	292\1, TENKASI ROAD, OPP BOMBAY LODGE, RAJAPALAYAM-626117	220398	Mr.Ku.G.Mutthiah
Tamilnadu	Ramanathapuram	Zeenath Telecom	13-B/23, PAL LUCKY PLAZA, RAMANATHAPURAM-623501	226750	Mr.M.S.Jahir Hussain

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Ranipet	Unicare Infocom Services	No.36, opp.Gangadhara Muddaliar Middle School, MBT Road, Novelpur, ranipet, Vellore Dist.	270806	Mr.Basker/ Mr.Karthik
Tamilnadu	Rasipuram	Sms Care Service	No 179 / 1, Anna Salai, Ground Floor, Rasipuram-637208	9345052553	Mr Manikavasagam
Tamilnadu	Salem	Vishwesh Mobiles	Sixer Complex, 121/19A, Sarada College Road, Next to Abi Medical Centre, Salem - 636007	3290535	Mr.Vasudev Nayak
Tamilnadu	Sivakasi	Tele World	78, PARSN PLAZA, OPP.TO.WATER TANK, SIVAKASI-626123	223283	Mr.B.Mathan Kumar
Tamilnadu	Tambaram	Saravanas Infocom Services Pvt Ltd	New No-43, Old No:3A, Mudichur road, Tambaram west, chennai 600045	32915599	Mr.Palani/ Mr.Ranjith
Tamilnadu	Tenkasi	Airtone	1/ 17, KMSS complex, west masi street, Tenkasi. 627811	227980	Mr.M.Nagaraja Sankar
Tamilnadu	Thanjavur	Z M Electronics	1006/1007, South East Rampart, Opp to Municipal Higher Sec School Tanjore - 613001	272595 / 329554	Mr.Ziauddin
Tamilnadu	Tindivanam	Reva Communications	Old No. 117/1, New No. 205/1, Nehru Street, Tindivanam - 604001	225250	Mr.Lakshmi Narayanan
Tamilnadu	Tiruchendur	Ark Mobile Solutions	ARK DTP centre, No. 1 a 7 North car street, Rayan Complex, Tiruchendur. 628215	329380	Mr.Mahesh
Tamilnadu	Tiruchengode	Balaji Electronics	108 s s d road, near lorry stand thiruchengode	325430	Mr.Sekar
Tamilnadu	Tirunelveli	Classic Electronic	39, Trivendrum Road, Opposite Kalimark, Welcome Complex, Palayamkottai, Tirunilveli-627002	2575801 / 3290339	Mr.Erkins
Tamilnadu	Tirupattur	Acal Computer Systems	52/1, kkc complex, krishnagiri road, tirupattur	325385	Mr.Sunder
Tamilnadu	Tirupur	Shri Vasavi Electronics	# 155-303, Mangalam Road, Karuvam palayam, Tirupur -641604	4244009	Mr.U.B. Bala Murali
Tamilnadu	Tiruvarur	Softel Teleservices	No 21, Municipal Complex, Ground Floor, Panagal Road, Tiruvarur-610001.	22110	Mr Ravi
Tamilnadu	Tiruvellore	Yamkarna Computer	38/186 JAWAHARLAL NEHRU ROAD, OPP TO SBI MAIN BRANCH, THIRUVALLUR - 602 001	37600329	Mr. Saravana
Tamilnadu	Trichy	S K Electronics	Raj Complex, 9/A EVR Road, Puthur, Trichy- 620017	277194	Mr.Krishnan
Tamilnadu	Tuticorin	Snows Cell Care	Kala Complex, No 20, B-1, W G C Road, Tuticorin-628002	2334043	Mr.Kennedy
Tamilnadu	Udumalpet	Allwa Electronics	5 Thuluva vellar shopping complex, V.O.C. street, UDUMALPET.642126	223047	Mr Sentamarai Kannan

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Vaniambadi	Reva Communications	No.848/3, CL Road, Vaniambadi - 635 751	395023	Mr.Lakshmi Narayanan
Tamilnadu	Vellore	Matha Communication	4, S.L.N Plaza, Opposite Odai Pilliar Koil, Gandhinagar, Vellor - 632006	2240800	Mr.Gunaa Shekhar
Tamilnadu	Villupuram	Broad Band	No 642, Nehruji Road, VILLUPURAM	222936	Mr.Pragasam
Tamilnadu	Virudhunagar	RBG Electronics	76/9, Lakshmi Complex, Pullalakottai Road, (Opposite Uzhavar sandhai), Virudhunagar-626001.	420160	Mr Karrupuswamy
Tripura	Agartala	VIDEO S R	7Melarmath, H.G .Basak Road, Agartala, West Tripura, Pin:799001	2328539	Arunabha Saha
Uttar Pradesh	Agra	Ankur Care Centre	27-G/111, Hotel Panchratna Building, Opp. Income Tax Building, Sanjay Place, Agra-282002	9412254152	Mr.Ankur Goyal
Uttar Pradesh	Aligarh	A.V.Computer Services	City Enclave opp. Kumar Nursing Home Ramghat Road	3200900	Mr.Vaibhav Gupta
Uttar Pradesh	Aligarh	Infocare	17, Vikram Arcade, Railway Road, Aligarh -202001	3258080	Mr. Prabal Bansal
Uttar Pradesh	Allahabad	Micronet Solution	B 38/1, SHOP NO. FF3 VASHITSTHA VINAYAK TOWER, TASHKAND MARG, CIVIL LINES, ALLAHABAD	9335395183, 3250231	Mr. Hashmi
Uttar Pradesh	Allahabad	Radio Centre	SHOP NO-3 1ST FLOOR MEENA BAZAR, Allahabad	3292488	Mr. Manish Khanna
Uttar Pradesh	Amroha	Shree Jee Traders	Bazar Zatt, Near Tehsil Mor, J.P.Nagar AMROHA-244221	9319075289	Mr.Arun bhargav
Uttar Pradesh	Azamgarh	Rajasthali	ASIF GANJ, CHOWK, AZAMGARH-276001	223644	Mr.Triloki Nath Jalaan
Uttar Pradesh	Badyun	Customer Care Services	Plaza Market 1st Floor Near Ghantaghar sixroad Badyun.	9319697938	Mr. Nazim
Uttar Pradesh	Baila	Sankatha Communications	Mall Godam road Dr.S. N.pandey Clinic Chowk Balia-277001. UP	9307637850	Mr. Manish
Uttar Pradesh	Barabanki	Yash Enterprises	Rashid Enclave, Mugal Darbar, First Floor, Nagar Palika Road, Barabanki	9336323714	Mr. Ajay Srivastava
Uttar Pradesh	Bareilly	Jai Infotech	SA-24 DEENDAYAL PURAM BAREILLY	3208484	Mr Rohit Tandon
Uttar Pradesh	Bareilly	Sapan Infotech	G - 64 A Kunwar Complex, Near Gupta Watch Co, 116 Civil Lines, Bareilly	3297933	Mr. Dharendra Negi
Uttar Pradesh	Basti	Royal Enterprises	near ses agency, janta hotal, gandhi nagar, basti	9336784054	Mr. Deepak shrivastav
Uttar Pradesh	Bhadoi	Kislay Communication	Station Road, Near Narmada Girls Inter College, Bhadohi-221401	9235506029	Mr.Kislay
Uttar Pradesh	Bijnor	Konark Service Centre	Shop No.7, 1st Floor, Near Ajaz Ali Hall, Nagar Palika Complex, Bijnor-246701	9358364067	Mr.Pratyush Gupta

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Uttar Pradesh	Bulandshahr	MN Telecom	Shop No-1 BHARAMAPUTRA COMPLEX, KALA AAM, Bulandshar	9358011688	Mr Taukir Khan
Uttar Pradesh	Chandousi	Om Technologies	697, SITA ROAD, NEAR GANESH MANDIR, CHANDOUSI - 202412	9359986766	Mr.Sachin Gupta
Uttar Pradesh	Deoria	Atharav Communication	SHOP NO 5, SHANTI COMPLEX, HANUMAN MANDIR ROAD	9335226799	Mr.K.N.Gupta
Uttar Pradesh	Etah	Triveni Computer Service	688/1 Vijay Nagar, Infront of Shraddha Cinema, Thandi Sadak, Etah-207001	9719398761	Mr.Vinod Kumar
Uttar Pradesh	Etawah	Frontline Computer	132, Sivil lines, Pakka Talab X-ing, Opp. HeroHonda Showroom, Etawah-206001	9219404194	Mr.Puneet Kaushik
Uttar Pradesh	Faizabad	Microworld Computer Hardware Lab	1st floor, Baldev Plaza, Rekhabganj, Faizabad	395744	Mr.Kapil/Sunil
Uttar Pradesh	Farrukhabad	Wave Technologies	2 B / 122 AVAS VIKAS, LOHIA PURAM, FARRUKHABAD-209625	9335921175	Mr.Dharamveer
Uttar Pradesh	Fatehpur	Trimurti Telecom Services	230, SHADIPUR CHAURAHA, NASEPEER ROAD, FATEHPUR-212601	9336223093	Mr.Sanjay Sachan
Uttar Pradesh	Ghaziabad	Azure Systems	F-28 Konark Building, RDC, Raj nagar GZB	2700717	Mr.Aseem Saraswat
Uttar Pradesh	Ghaziabad	Concessionair Documentation India Pvt Ltd (Cdil)	C-83, Rajnagar District Center (RDC), Ghaziabad	3292011	Mr.Anil Tiwari
Uttar Pradesh	Gonda	Digitech Services	Suraj Complex Malviya Nagar, Ground Floor, In front of Distt. Mahila Hospital, Gonda	9336695719	Mr.Atul Singh Chauhan
Uttar Pradesh	Gorakhpur	Eternal Electronics	Shop No.11, Pandey Complex, 33, Kasya Road, Opp DIG Bunglow, Gorakhpur -273001	9336410222	Mr. Ajith
Uttar Pradesh	Gorakhpur	MM Communication	Udai Trade Centre, Opp Dr H.N.Singh Medical College road, Basharatpur, Gorakhpur	3250395	Mr.Ashwani
Uttar Pradesh	Hapur	Smart Solutions	10, 1st Floor, City Plaza, Hapur, Ghaziabad - 388001	9219659957	Mr.Rajkumar Kanaojia
Uttar Pradesh	Hardoi	Shipra Electricals & Appliances	SHOP No.7 RD PLAZA, INFRONT OF VADIK VIDHYA MANDIR, NEAR AGARWAL DHRAMSALA & HOTEL UTSAV, CIRCULAR ROAD, HARDOI-241001	222384	Mr.Gaurav
Uttar Pradesh	Hathras	Arya Electricals	Bldg No.2206, Near Mayfair Hotel, Kamla Bazar, Hathras-204101	9319338655	Mr.Suneet Arya
Uttar Pradesh	Jaunpur	Shubham Pustakalya	Mandi Naseeb Khan, Near Siya College, Jaunpur	9336510130	Mr.Sudhir/Sanjay
Uttar Pradesh	Jaunpur	Supreme Communication	J.P. Complex, Oland Ganj, Jaunpur	9235407278	Mr.Mahatab Raja Beg
Uttar Pradesh	Jhansi	Krishna Enterprises	372/A CIVIL LINES, GWALIAR ROAD, JHANSI-284001	9335090997	Mr.Sujeet

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Uttar Pradesh	Kannoj	Dixit Mobile Lab	SHOP NO. A1 WARSİ COMPLEX, LAKHAN TIRAHA, KANNOJ	9335042373	Mr.Sunil Dixit
Uttar Pradesh	Kanpur	Aakarsh Electronics	63/2 C(9)BALAJI COMPLEX, THE MALL, KANPUR	9335360303	Mr.Raman
Uttar Pradesh	Kanpur	LB Infotech	111 A/409 1st floor, 80-ft road, ashok nagar, kanpur	3207303	Mr.Deepak Bhatia
Uttar Pradesh	Kasganj	Prem Computer Services	Roop Complex, Nadrai Gate, Kasganj-207123	9837403904	Mr.Vinay Agrawal
Uttar Pradesh	Khatauli	Sigma Systems	A-6, Shivlok Market, Near Indra Murti, G.T.Road, Khatauli-388001	9319666000	Mr.Alok Kumar
Uttar Pradesh	Lakhimpur	S S Electronics	GURDARSHAN BUILDING, KACHEHRI ROAD, LAKIMPUR KHERI, LAKHIMPUR -262701	9335038258	Mr.Saurabh Sinha
Uttar Pradesh	Lucknow	Alfa Electronics	Shop No.GF20 ABC Complex, Kanpur Road, Lucknow	3248730	Mr.Harjinder Singh
Uttar Pradesh	Lucknow	Hitech Communication	SS 205, Cross road Plaza, Badshah Nagar Crossing, Lucknow.	9335088061	Mr.Ravi Prakash
Uttar Pradesh	Lucknow	Mobile Dot Com	shop no. 111, 1st floor, Shri Ram Towers, Ashok Marg, Lucknow	9335819202	Mr Anand Jhouri/ Archana
Uttar Pradesh	Lucknow	Net Com	3 way road, City Point, Opp Krishi Bhawan, Lucknow-226024	3294222	Mr.Vinod Sharma
Uttar Pradesh	Lucknow	RR Enterprises	Shop No.3, first floor, Deewan Chand Complex, 292/11 Chowk, Lucknow	3262263	Mr.Rohan/Yogesh
Uttar Pradesh	Mainpuri	Raj Communication	1002, Sadar Bazar, Near PNB, Mainpuri-205001 (U.P)	9358090251	Mr.Rishabh Khirbat
Uttar Pradesh	Mathura	R K Infocare	G-1, Atithya Palace, Sonkh Adda, Junction Road, Mathura-281001	3292274	Mr.Alok Gupta
Uttar Pradesh	Meerut	Care Centre	G-19, Vardaman Plaza, Garh Road, Meerut-250005	3258427 / 4005019	Mr.Ajay Mittal
Uttar Pradesh	Meerut	Coincap Services	Labour Compound, Above Allahabad Bank, Near Akash Ganga Jewellers, Begum Bridge, Meerut	2667942	Mr.Atul Mittal
Uttar Pradesh	Meerut	Essar Services	F-132-1333, 1st Floor, Ganga Plaza, Begum Bridge Road, Meerut-250001.	4025863 / 9837067894	Mr.Rajiv Gupta
Uttar Pradesh	MIRZAPUR	Singh Cyber	IMARTI ROAD, OPP- LIC OFFICE, MIRJAPUR-231001	9335205600	MR.Anup Singh
Uttar Pradesh	Modinagar	Ananya Communications	24, K.N.MODI COMPLEX, Modinagar-201204	325424	Mr.Nitin
Uttar Pradesh	Moradabad	Bhavya Technologies	A12, 1st Floor, Rampur Road, Gandhi Nagar, Moradabad	3292318	Mr.Vivek Kumar Singh
Uttar Pradesh	Mugalsarai	Sky Mobile World	SUPER MARKET, MUGALSARAI	9335251754	Mr.Vibhuti Jaiswal
Uttar Pradesh	Muzaffarnagar	Advance Series	Shop No-15 prakash chowk Muzffarnagar-251001	9412210142	Mr. Rajiv

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Uttar Pradesh	Muzaffarnagar	Jai Computers	Shop No. 4, 1st Floor, Roorkee road, Near Shiv Chowk, Central Bank Mkt, Muzaffarnagar-251001	3294447	Mr.Manohar Singh
Uttar Pradesh	Noida	M R Telecom	D-329, Sector 10, Noida, (Corner Building, Noida Stadium - Jhundpura Main Road)	4312715	Mr.Kailash Aggarwal
Uttar Pradesh	Pilibhit	Kamal Electronics	Station Road, Pilibhit	9319911226	Mr. M A Jillani
Uttar Pradesh	Pratapgarh	Chandra Pratap Veer & Co	KATCHERY ROAD, CHOWK BAZAR, PRATAPGARH -230001	9335050301	Mr.Rajesh Agarwal
Uttar Pradesh	Rai Bareilly	Karuna Enterprises	Shop No.6 & 7, City Complex, Kachary Road, Raeberilly	9336005741	Mr.Vikas
Uttar Pradesh	Rampur	Mamta Technologies	3Fs Shopping Complex, Rahe Murtaza Road, Civil Lines, Rampur-244901	3294923	Mr.Rajeev Yadav
Uttar Pradesh	Saharanpur	Maharaj Communications	1st Floor, Pradeep Hotel Compound, Court Road, Near Indiam bankSaharanpur-247001	3250239	Mr.Pankaj Malhotra
Uttar Pradesh	Shahjahanpur	Sunny Mobile Point	258 B TARIN BAHADURGANJ, SHAHJANPUR	9335019616	Mr.Rajaram Maurya
Uttar Pradesh	Sitapur	Higrade Computers	7, Muncipal Market, Sitapur	9936819899	Mr.Sanjeev Goel
Uttar Pradesh	Sultanpur	S S Infocom	SHOP NO. 14&15 NANDINI COMPLEX NEAR SUPER MARKET SULTANPUR-228001	9335055217	Mr.Sachin Dwivedi/Abhinav
Uttar Pradesh	Unnao	Avijit Infocom	251 Opp Collector Ganj, Unnao-209801	6820020	Mr.Vishnu Pandey
Uttar Pradesh	Varanasi	Jaiswal Electronics	SIDDHARTH COPMPLEX, C-2/10-A, Ramkatora, Near Petrol Pump Lahurabir, Varanasi-221001	9335407000	Mr.Sujeet
Uttar Pradesh	Varanasi	Shivam Mobile Distributers	Shop No.5, B37/115-B-1 Baradari Complex, Rathyatra Crossing, Varansi Pin 221010	9335418998	Mr.Rakesh kumar singh
Uttaranchal	Almora	Kumar Telecommunications	Paltan Bazaar, Almora	9411525789	Mr. S Kumar
Uttaranchal	Dehradun	Krishna Communication	Shop No 15A, Meedo Plaza, Rajpur Road, Dehradun, Uttaranchal-248001	09358112922 / 09358119696	Mr.Vinod
Uttaranchal	Haldwani	Fairdeal Agencies	1st Floor, Nainital Road, Uttaranchal Trade Centre, Tikonja Chouraha, Tikonja, Haldwani	282116	Mr.Ajay Gupta
Uttaranchal	Haridwar	Maharaj Computer Services	B-7, Royal Plaza, Ranipur Mod, Haridwar	9359209901	Mr. Kamal Sachdeva
Uttaranchal	Kashipur	Tirpti Communications	Station Road, Main Market, Udamsingh Nagar	9359000000	Mr.Ajay Gupta
Uttaranchal	Roorkee	Geetanjali Telecom	Shop No.6, Shyam Market, BSM Tiraha, NehruNagar, Dehradun Road, Roorkee-247667.	326510	Mr. Manish Kumar

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
West Bengal	Asansol	Sky Computer & Telecom	Islam Market, Nuruddin Road, Assansol-713301	2207719	Mr.Syed Arshad Ali
West Bengal	Behrampur	Chaitannya Enterprise	152, B B Sen Road, Sadar bazar, PO Behrampur, Distt Murshidabad, pin-742101	9333310161	Mr.Subhas Chandra Basak
West Bengal	Bolpur	Cyber World	59, SUPER MARKET, SANTINIKETAN ROAD, BOLPUR - 731204	252542	Mr.Kishor Kumar Mukherjee
West Bengal	Burdwan	San Infosys	27/1 G.T Road, East End, Burdwan -713103.	3290265	Mr.Sanjit Debnath
West Bengal	Durgapur	Digittech Service	Ashok Bhavan J.K.Pal Lane .Benachity , Durgapur -713213	3293600	Mr.Pintu Chatterjee
West Bengal	Haldia	Digitronix	Holding no -25, PO Khanjanchak, PS Durgachak, Haldia, Dist- East Medinapur-721602	277277 / 9332987527	Mr.Suman Jana
West Bengal	Howrah	Joyram Infotech	51, Jessore Road, Habra Bazar, Das Market, Dist- 24th Pargana(North), PIN-743263	302399 / 329677	Mr. Malay Das
West Bengal	Katwa	Devarshi Mobile Communication	Bhutnath Tala, Besides Ram Bhavan, Post - Katwa, Burdwan - 713130	9333611904	Mr. Devananda Dutta
West Bengal	Kharagpur	S. J .Commnication	Inda Main Road, Khudiram Ram Market, Kharagpur .Shop No-53. Pin -721305	324056	Mr.Mr.Suman Jana
West Bengal	Kolkata	Benma Infosol Pvt Ltd.	P-168/1 CIT Road, Scheme VIIM, KOLKATA 700 067	32943176	Mr.Arun Surana
West Bengal	Kolkata	Friends Communication	32(8) Barasat Road, N/L 15 no railgate, PO-nonachandanpukur, PS- Titagarh, Barrackpore, Dist- North 24PCS, PIN-743102	25921263	Mr.Arup Sarkar & Tarasankar Mukherjee
West Bengal	Kolkata	Jaksom Engineering Pvt Ltd	Block-A, Shop-1, Ambika Vihar, 1/1 Harduttrai Chamaria Road, Howrah- 711001	32950383	Mr.P.Mukherjee
West Bengal	Kolkata	JP Computers	5B Ekdalia Place, Kolkata - 700019	24401923	Mr.Somim Kabir
West Bengal	Kolkata	Skylink	8/1A, Little Russel Street, Calcutta-700071	32903814	Mr.H R Molla
West Bengal	Kolkata	Sun Mobile Service	15 B.T. Road, N/L Peikpara Bus Stop, Kolkata -700002	32505444	Mr.Vivek Kumar Gupta
West Bengal	Krishnanagar	Addya Electronics	Rajani mukharjee Lane, krishna Nagar, Nadia-741101	2329355	Mr Arijit Sen
West Bengal	Malda	Deb Infotech	PIROJPUR, WOMENS COLLEGE ROAD, MALDA-732101	9434345486	Mr.UTPAL DEY(DEBASIS)

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
West Bengal	Midnapore	Zerobit	Vill- Parbatipur, P.O.-Tamluk, Dist- Purba Midnapur, PIN-721636	267476 / 9434110802	Mr.Chanakya Sengupta
West Bengal	Nadia	Prayash	30 SWAMI VIVAKNANDA SARANI, RANAGHAT, DIST-NADIA,	9333515949	Mr .Amar Nath Malick
West Bengal	North 24 Parganas	M/s Telelink	Bashirhat Old Market(Bowbazar) .Bashirhat Dist, North 24pgs, Pin-743411	325499	Mr. Sukanta Debnath.
West Bengal	North 24 Parganas	Molina Traders	Jessore Road, Bongoan, Dist- North 24 th Pargana, PIN-743235	325433	Mr. Subir Dutta
West Bengal	Purulia	IT POINT	N.C DAS GUPTA ROAD, 2ND FLOOR, SONARTARI APPT(NAMO PARA), PURULIA -723101	9333441065	Mr.Pinaki Roy Choudhary
West Bengal	Serampore	Sri Guru Mobile Service	87 B/15 G.T.Road (West), Hooghly Pin-712203	32528581	Mr.Shyamal Kumar Das
West Bengal	Siliguri	Care	sumantra bhawan.S.B.I hakim para building, 160/1030 Haren Mukharejee Road, sili guri-734001	6450515	Mr.Snjoy Dutta


LG | **SERVICE**



1800-180-9999*

39-01-0909**

*MTNL / BSNL
**Prefix STD Code

