

DX900

User Guide

Safety Instructions

Please Read Before Proceeding

- Avoid heavily pressing on the touch screen.
- Avoid heavily pressing on the touch screen with the stylus or your fingers.
- This product is not charged when shipped from the factory. When you use this product the first time, we recommend that you install the battery as illustrated and fully charge it for about 8 hours before use.
- Do not remove the battery while charging.
- Before installing the SIM card, launch **Communication Manager**, then tap the  button. When the color of the icon turns orange , this indicates that the wireless connection of the Pocket PC is disabled.
- When aboard an aircraft, at a medical facility, or at the gas pump where wireless communication devices are prohibited, please launch the **Communication Manager** and then tap the  button. When the color of the icon turns orange , the Flight Mode is activated and the wireless connection of the Pocket PC is disabled.
- In case the Pocket PC is damaged, send it back to the dealer for repair. Do not attempt to disassemble the Pocket PC on your own; otherwise the warranty will be void.

Where to Find Information

For information on:

See this source:

Programs on your Pocket PC

This User's Guide and Pocket PC Help. To view **Help**, tap  > **Help**.

Additional programs that can be installed on the Pocket PC

The Pocket PC Getting Started CD.

Connecting to and synchronizing with a desktop computer

Check the user's guide that comes with this product or look for the online help relevant to synchronization tools on the desktop PC or the Pocket PC.

Up-to-date information on your Pocket PC

<http://www.microsoft.com/windowsmobile/>

Note

This document lists the functions, specifications, and illustrations for reference only. The actual purchased product should be taken as the standard. Supported features for this product is subject to version differences. We reserve the right to make modifications to the features and contents contained in the instruction manual and the product.

Trademarks and Copyright

Copyright © 2008 Acer Incorporated. All Rights Reserved.

Trademarks and trade names mentioned in this document are those of their respective owners.

The *Bluetooth*® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Acer Incorporated is under license. Other trademarks and trade names are those of their respective owners.

Contents

1	Getting Started	1-1
	PACKAGE CONTENT	1-1
	EXTERNAL VIEWS	1-2
	HARDWARE HOTKEY FUNCTIONS	1-4
	SIM CARD(S)	1-6
	Installing the SIM Card(s)	1-6
	Removing the SIM Card(s).....	1-7
	BATTERY	1-8
	Installing the Battery	1-8
	Removing the Battery.....	1-9
	CHARGING POWER AND POWER SUPPLY	1-10
	GETTING STARTED	1-12
	POWER ON AND OFF	1-13
	Sleep Mode	1-14
	Turn on the Screen	1-15
	Restarting the Pocket PC	1-16
2	Using the Pocket PC	2-1
	START	2-1
	Screen.....	2-1
	Today Screen	2-3
	Programs	2-7
	System Application Programs	2-9
	SPB MOBILE SHELL	2-12
	Starting Spb Mobile Shell	2-12
	Using Spb Mobile Shell	2-14
	Configuring Spb Mobile Shell	2-18
	COMMUNICATION MANAGER	2-19
	Switching a Connection On / Off	2-20

Managing Dual SIM Cards on a Single Device	2-21
Flight Mode	2-22
ENTER INFORMATION ON YOUR POCKET PC	2-23
Enter Text Using the Input Panel	2-24
Write on the Screen	2-28
Draw on the Screen	2-30
Record a Message	2-31
Voice Commander	2-33
3 Voice Command and Satellite Navigation //	3-1
NAVIGATION DEVICE INSTALLATION	3-1
GPS NAVIGATION SOFTWARE INSTALLATION	3-2
CONDITIONS FOR USING GPS CAR NAVIGATION	3-2
SATELLITE DATA UPDATE (NOT SUPPORTED IN USA)	3-4
LOCATION SMS	3-7
GPS VIEWER	3-9
4 Using the Phone //	4-1
ADJUSTING THE PHONE VOLUME	4-4
PHONE FUNCTIONS	4-5
Turning on Your Phone(s)	4-5
Making a Call	4-6
Answering / Ignoring a Call	4-11
Ending a Call	4-12
Video Call	4-13
CUSTOMIZING YOUR PHONE	4-16
PHONE APPLICATION PROGRAMS	4-17
SIM Manager	4-17
SIM Tool Kit	4-19
SMS Sender	4-20
Speed Dial	4-21


5	Customize Your Pocket PC //	5-1
	ADJUSTING SETTINGS.....	5-1
	NOTIFICATIONS	5-2
	POWER PREFERENCE SETTINGS.....	5-3
	BACKLIGHT	5-4
	LIGHT SENSOR.....	5-5
	GRAVITY SENSOR	5-6
	MICROPHONE	5-7
	ADJUST VOLUME	5-8
	MEMORY OPTIMIZATION	5-9
	SCENARIOS.....	5-10
	FIND AND ORGANIZE INFORMATION	5-11
	NAVIGATION BAR AND COMMAND BAR.....	5-12
	POP-UP MENUS	5-13
	REDEFINE HOT KEYS.....	5-14
6	Synchronization //	6-1
	WINDOWS VISTA PART	6-1
	WINDOWS XP/2000/98 PART.....	6-3
	INSTALLING AND USING ACTIVESYNC	6-4
	FAQ About Synchronization.....	6-6
	USB SYNCHRONIZATION	6-7
	SYNCHRONIZATION TOOL ON POCKET PC	6-10
	SYNCHRONIZING USING BLUETOOTH	6-11
7	Connections //	7-1
	CONNECTING TO THE INTERNET.....	7-1
	Connection Wizard	7-1
	Setting the GPRS Connection.....	7-3
	Starting GPRS Connection.....	7-5
	Disconnecting GPRS.....	7-7
	USING BLUETOOTH	7-8

Setup the Bluetooth Connection	7-9
INTERNET SHARING	7-13
CSD TYPE	7-14
CONNECTING WITH A PERSONAL COMPUTER	7-15
WIRELESS LAN TRANSMISSION	7-15
8 Using Wireless LAN //	8-1
CONNECTING TO WIRELESS LAN	8-2
CONFIGURE YOUR WIRELESS NETWORK	8-3
WLAN Setup Scenarios.....	8-3
Configure Your Wireless Network (Normal Setup).....	8-4
Configure Your Wireless Network (Proxy Setup).....	8-7
9 E-mails and Messages //	9-1
MESSAGE ACCOUNTS	9-1
TEXT MESSAGES.....	9-3
Reading Received Text Messages	9-3
Creating a Text Message.....	9-5
MULTIMEDIA MESSAGES	9-7
Reading MMS Messages	9-7
Creating an MMS Message	9-8
E-MAILS	9-9
Synchronizing E-mail Messages.....	9-10
Connecting Directly to the Mail Server	9-11
E-mail Server Setup	9-12
Sending / Receiving E-mails.....	9-14
Direct Push Technology Alert	9-16
WINDOWS LIVE™ MESSENGER	9-18
Setting Up	9-19
Working with Contacts.....	9-20
Chatting with Contacts.....	9-21

10 Multimedia //	10-1
USING CAMERA	10-1
Pocket PC Exterior and Camera.....	10-1
How to Use the Camera?.....	10-3
Common Tools for Camera.....	10-7
Common Tools for Camcorder.....	10-10
Advanced Setup for Camera or Camcorder.....	10-12
ALBUM.....	10-15
Preview Album Information.....	10-15
Slideshow Settings.....	10-17
NAMECARD MANAGER.....	10-18
Digitize New Name Cards	10-18
Name Cards Management	10-21
11 Companion Programs //	11-1
CALENDAR; SCHEDULING APPOINTMENTS AND MEETINGS	11-2
Create an Appointment	11-3
Use the Summary Screen	11-4
Create Meeting Requests.....	11-4
Schedule a Meeting	11-5
CONTACTS.....	11-6
Finding a Contact	11-6
Managing Your Contacts.....	11-7
Creating a Contact	11-8
Using the Summary Screen	11-9
TASKS; KEEPING A TO DO LIST	11-10
Create a Task.....	11-11
Use the Summary Screen	11-12
NOTES; CAPTURING THOUGHTS AND IDEAS.....	11-13
Create a Note	11-14
WORD MOBILE	11-15

EXCEL MOBILE	11-18
Tips for Working in Excel Mobile.....	11-20
POWERPOINT MOBILE.....	11-21
WINDOWS MEDIA PLAYER.....	11-22
STREAMING PLAYER	11-24
INTERNET EXPLORER	11-25
Using Internet Explorer.....	11-25
The Mobile Favorites Folder.....	11-27
Favorite Links	11-28
Synchronize Mobile Favorites	11-28
12 Maintaining the Pocket PC //	12-1
BACKUP UTILITY	12-1
Storage Space.....	12-1
Backup Files	12-2
Advanced Settings Options	12-3
Restore Files	12-5
ADDING OR REMOVING PROGRAMS.....	12-7
Add Programs Using Synchronization Tools.....	12-7
Add a Program Directly from the Internet	12-8
Add a Program to the Start Menu	12-9
Remove Programs	12-10
MANAGE MEMORY	12-11
View Memory Status.....	12-11
Find Available Memory.....	12-12
SYSTEM INFORMATION.....	12-15
13 Voice Commander //	13-1
STARTING VOICE COMMANDER	13-2
VOICE COMMAND FORMAT	13-3
VOICE COMMANDER SETTINGS.....	13-5
Contacts Settings Page	13-5


Application Settings Page.....	13-8
Music Settings Page	13-10
Digit Training Page.....	13-12
Digit Settings Page.....	13-14
Advanced Settings Page.....	13-15
FAQ	13-16
14 Specifications //	14-1
15 Regulation Notice and Safety Declaration //	15-1
SAR INFORMATION	15-1
HEALTH AND SAFETY INFORMATION	15-2
REGULATORY NOTICES.....	15-6
WEEE NOTICES	15-9
16 FAQ //	16-1
17 Index //	17-1




1 Getting Started

Package Content

Pocket PC, stylus, battery, Getting Started CD, Quick Start Guide, AC adapter, USB cable, headset, leather case.

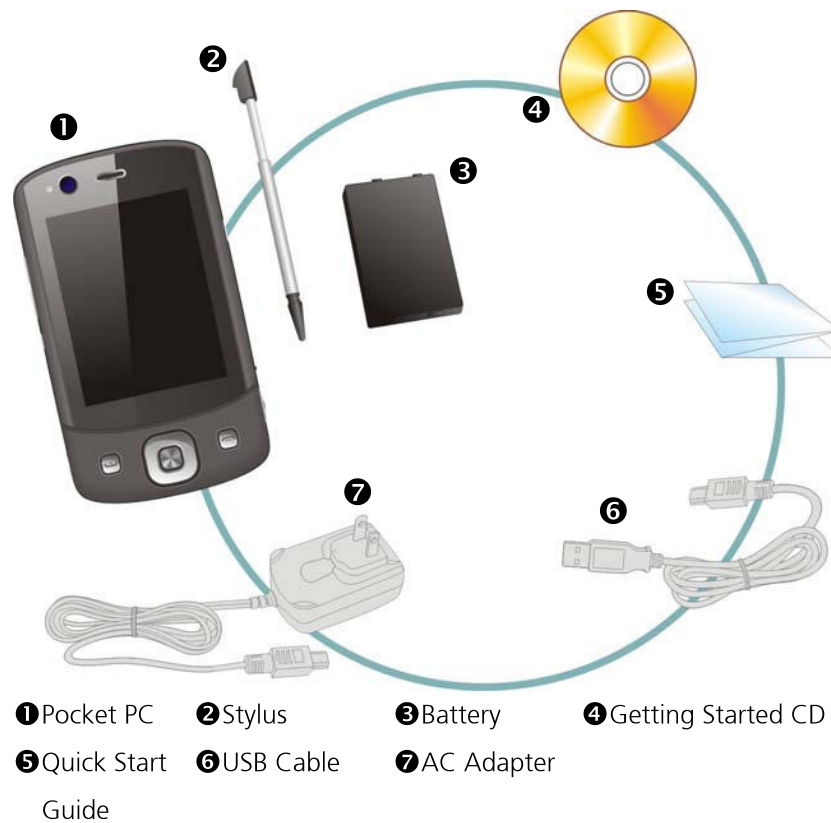


External Views

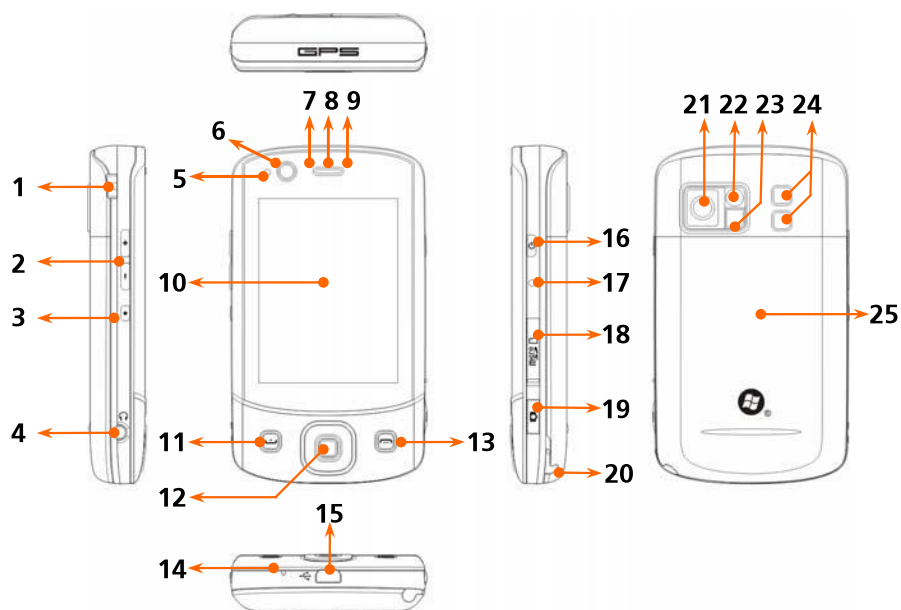

1. Strap holder	2. Volume control key
3. Record key / Voice Commander hot key	4. Headset connector
5. Light sensor	6. Video conference camera
7. Bluetooth / WLAN / GPS LED indicator	8. Phone Receiver
9. Charging / Mobile Phone LED indicator	10. Display, Touch screen
11. SEND button 	12. Navigation pad
13. END button 	14. Microphone
15. Mini USB connector	16. POWER button

17. RESET button	18. MicroSD slot
19. Camera hot key or Camcorder	20. Stylus holder
21. Camera lens	22. Preview mirror
23. Flashlight LED	24. Speaker
25. Back cover, battery is inside	

Hardware Hotkey Functions

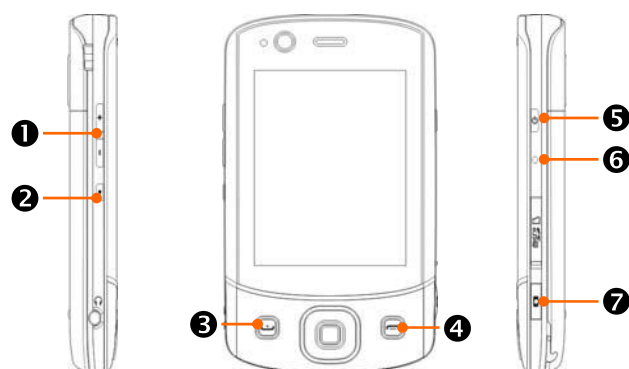

Hardware Button	Short Press (Press once and release)	Long Press (Press and hold for a few seconds and release)
1  	Adjust volume	--
2 	Record / Voice Commander	Notes
3 	Phone / dial / redial / answer	Telephone hold
4 	● Hang up during call ● Disconnect during GPRS connection ● Skip to Today screen while in other programs	● Turns off the phone function ● Turns on the phone function
5 	Turn on/off screen, enter the Sleep mode	Enter Power off mode of the Pocket PC


Hardware Button	Short Press (Press once and release)	Long Press (Press and hold for a few seconds and release)
5  + 6 	POWER button + RESET button = Cold boot	--
6 	RESET button	--
7 	Camera or Camera Shutter	--

SIM Card(s)

Your device is designed for operating two SIM cards simultaneously, so you can receive and make calls on either number. Both the SIM card slots are capable of carrying GSM SIM cards. The slot on the right is dedicated for GPRS/3G compatible SIM card. To make video calls or send an MMS message, please make sure your GPRS/3G SIM card has been installed in **SIM1** card slot correctly.


Installing the SIM Card(s)

1. Before installing or removing the SIM card, make sure all the wireless connections are disabled. Launch **Communication Manager**, then tap the  button to turn it orange.
2. Press the **POWER** button to turn off the screen.
3. Disconnect the USB cable or AC adapter if either of them is connected to your Pocket PC. The removal of SIM card or battery while the Pocket PC is connected with a USB cable or AC adapter may damage your device.
4. Turn over your Pocket PC and remove the back cover.
5. With the missing corner facing out of the slot and the metallic contact facing down, slide the SIM card into the slot.

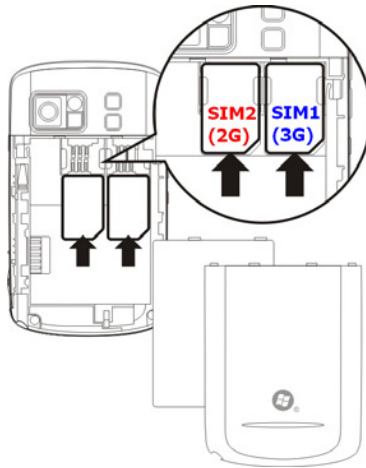

Removing the SIM Card(s)

1. Disconnect the USB cable or AC adapter if either of them is connected to your Pocket PC.
2. If the battery is installed, turn off the device and remove the battery.
3. With a small amount of pressure, plug your stylus tip a bit into the hole on the top of SIM slot, use it to hook the SIM card edge until it loosens from the SIM card holder.
4. Use your finger to slightly slide the SIM card out of the card slot.

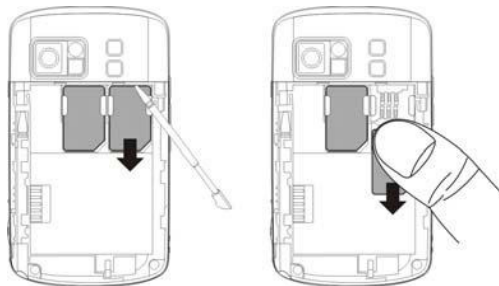


Battery

Using the Pocket PC for the First Time

If you are opening this product for the first time, the main battery and the Pocket PC are packed separately inside the product package.

Installing the Battery

1. Turn over the Pocket PC and remove the back cover.
2. Place the battery in the back of Pocket PC. Make sure that the golden contacts are aligned to the battery box.
3. Gently insert the battery until it clicks.
4. Replace the back cover.

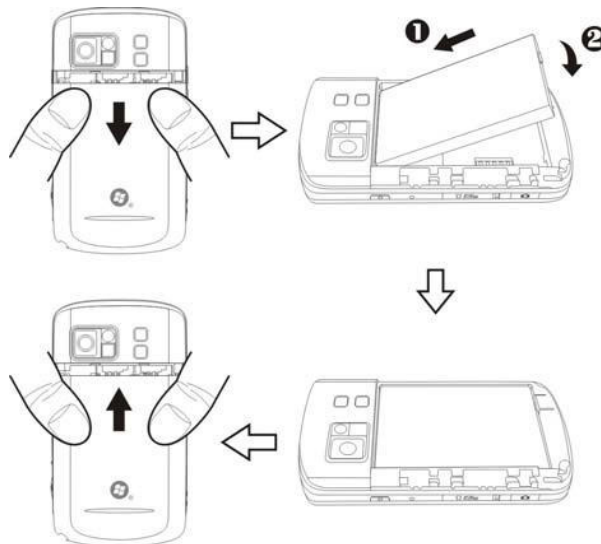


Removing the Battery

1. If the phone, GPRS or wireless LAN connection function is already activated, deactivate it first and then replace the battery.
2. Disconnect the USB cable or AC adapter if either of them is connected to your Pocket PC. The removal of SIM card or battery while the Pocket PC is connected with a USB cable or AC adapter may damage your device.
3. Turn over your Pocket PC and remove the back cover.
4. Remove the battery.

Charging Power and Power Supply

- ❶ Connect the AC adapter plug to any household power outlet.
- ❷ Connect the other plug from the AC adapter to the USB port. The Pocket PC starts to charge automatically.
- ❸ If you need to connect Pocket PC and desktop computer, you could connect the USB cable to the USB port. And then connect the other end of the USB cable to the USB port on the desktop computer. Your Pocket PC will also charge at the same time.

But don't remove the battery while charging. Once you remove the battery, Pocket PC will not work.

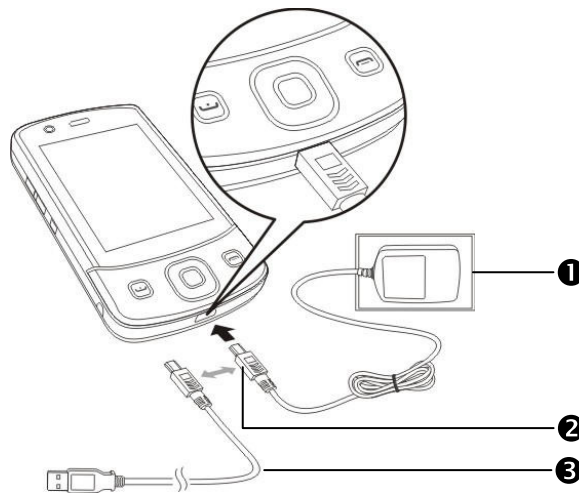

1. It will take about 8 hours to fully charge the battery after the first time you open the package. Subsequent charging will only take about 3 hours. After charging, you can disconnect the AC adapter and carry the Pocket PC around portably. To maintain smooth operation, charge the power regularly.
2. View the battery icon  on the upper right corner to check the power usage condition.
3. The LED indicator on the top of the Pocket PC will indicate the various functions that are currently in use.

LED indicators	Behavior / Meaning
Red	● Red always light: Device is charging. ● Red sparkling once every 4 seconds: Warning of battery low level, missed calls or unread messages. ● Red sparkling continuously: Battery level very low.
Green	● Green always light: Battery charging is full. ● Green sparkling once every 4 seconds: GSM is connecting on line.
Blue	● Blue sparkling once every 4 seconds: Bluetooth enabled.
Amber	Amber sparkling once every 4 seconds: WLAN enabled.
White	White sparkling once every 4 seconds: GPS enabled.


Getting Started

Getting Started provides you with basic concepts and shortcuts to certain primary features and settings.

Tap  > **Programs** > **Getting Started**.





1 Tap a subject to view how to get started.

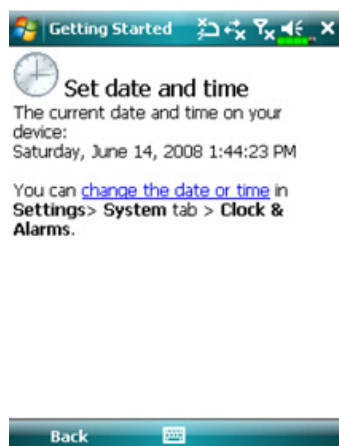

2 Tap hyperlink to execute the specified command.

3 Tap **Back** to return to the **Getting Started** main screen.

Power On and Off

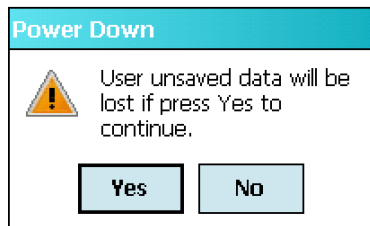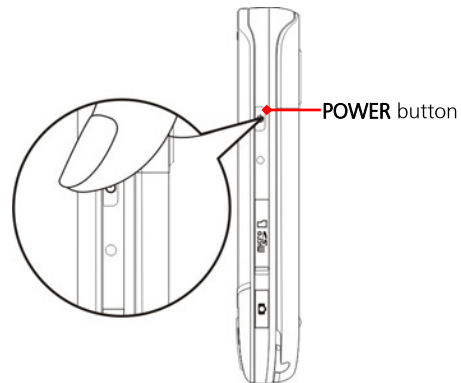

1. Press and hold the **POWER** button on the Pocket PC and then tap **Yes** to turn off the Pocket PC. All functions will be disabled; this is not the same as entering Sleep mode.
2. To turn on, simply press the **POWER** button once.

Using the Stylus to Touch the Screen

- Your Pocket PC is designed for graphics-based operation. Generally speaking, we usually “use the stylus to perform basic actions such as tap, drag, and tap and hold” on the touch screen. Other actions such as reset and cold boot will require the use of the stylus tip.
- Pull the stylus to full-length to make it easier to tap the screen during operation. When kept completely in the stylus holder, the stylus length shortens.
- Avoid heavily pressing on the touch screen with the stylus or your fingers.

Sleep Mode


1. Press the **POWER** button of the Pocket PC to enter the Sleep mode. At this time, the screen is turned off and all peripheral devices enter the power-saving mode. But if the phone is turned on, it is still in the call waiting mode.
2. To turn on the screen later, just press the **POWER** button.



3. Tap  > **Settings** > **System** tab > **Power** and then the **Advanced** tab to set the device to turn off automatically after waiting for a certain time period.

Turn on the Screen

This product is designed with a power-saving feature. If the screen is turned off, press the **POWER** button of the Pocket PC to turn it on.

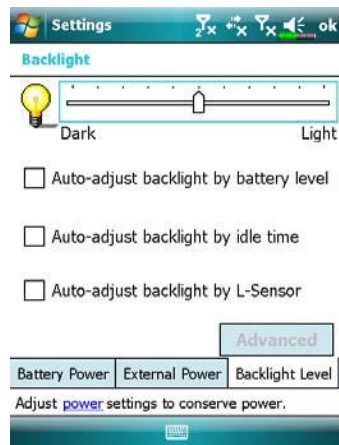

If the screen is too dark and you cannot see clearly, set the proper brightness level for the backlight.

Tap  > **Settings** > **System** tab > **Backlight** > **Backlight Level** tab.

Restarting the Pocket PC


Appropriate situation: If the Pocket PC is unable to maintain normal operation, has no response, or if the screen is frozen.

For your consideration, factoring into your safety and convenience, please refer to the following instructions in order:

Reset	Press the RESET button of Pocket PC with the tip of the stylus.
Default Settings procedures	If the touch screen is functional, please tap  > Programs > Utilities > Default Settings
Clean Boot	Press and hold both POWER button and RESET button for a while, then release them simultaneously. Wait for a few seconds until the screen wakes up displaying the model name, firmware version and firmware build date of your device, instantly press and hold  . Continue pressing  and release it when you see an inquiry box shown on the screen.

Reset

Reset method: Press the **RESET** button of Pocket PC with the tip of the stylus.

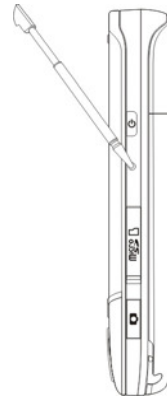

- Appropriate situation: If the Pocket PC is unable to maintain normal operation, has no response, or if the screen is frozen.
- Result: In a moment, when Pocket PC automatically completes the system startup process, the last display will be the Today screen. This will retain the Microsoft Windows, factory pre-installed applications, and user's input data, newly installed programs, and user custom settings.

Default Settings

Tap  > Programs > Utilities > Default Settings.



1. If this application is inadvertently accessed, please select the  to the upper right of the screen to exit, the system will not be affected.

2. If you are certain that you wish to perform this action, please select the data input block on the right, and enter the authorized code in the block to the left. Then tap **OK**.

- Appropriate situation: If the Pocket PC is unable to maintain normal operation, but the touch screen is functional. Please refer to the instructions in this section to troubleshoot.
- Result: This will retain only the Microsoft Windows, and factory pre-installed applications. Other settings such as user's input data, newly installed programs, and user custom settings will all be cleared.


Clean Boot

Cold boot method:

Press and hold both **POWER** button and **RESET** button for a while, then release them simultaneously. Wait for a few seconds until the screen wakes up displaying the model name, firmware version and firmware build date of your device, instantly press and hold .



- Appropriate situation: If a previous reset has already been attempted and the Pocket PC is still unable to maintain normal operations, has no response, or if the screen is frozen.
 - Before executing the preceding "Cold boot method", please carefully consider the following instructions and then decide on the cold boot method.
1. After a cold boot is performed, if no buttons are pressed, when Pocket PC automatically completes the system startup process, the last display will be the **Today** screen. This is identical to the reset result.
 2. If a previous reset has already been attempted but the Pocket PC is still unable to maintain normal operation, consider the following solution:
 - ❶ Press and hold both **POWER** button and **RESET** button for a while, then release them simultaneously.
 - ❷ Wait for a few seconds until the screen wakes up displaying the model name, firmware version and firmware build date of your device, instantly press and hold .
 - ❸ Continue pressing  and release it when you see this message shown on the screen.

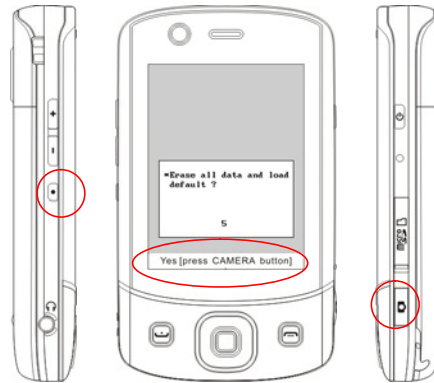

The operation **"Erase all data and load default?"** will delete all the data you stored on your device and restore it back to factory default settings.

- If you press  upon seeing the line **"Yes [press CAMERA button]"** at the bottom of screen, all the data you stored, programs you installed and customized settings you made on this device will all be cleared. Follow the onscreen instructions to complete the resetting after the device reboots.
- Without your confirmation of this operation as pressing , the device will cancel this procedure after a few seconds idle.

Caution

1. After performing a cold boot, the system will retain Microsoft Windows and pre-installed programs. If you answer **"Yes"** to the question displayed after a cold boot, other items such as the user's input data, newly installed programs and user settings will be lost.
2. There are two ways to retain your data, loaded default and registry:
 - ❶ Perform a Reset.
 - ❷ Performing a Cold Boot, and answer **"No"** when the above question displays.


2 Using the Pocket PC

Start

Screen

Tap  > **Settings** > **System** tab > **Screen**.

The first time you use or cold boot the pocket PC, the system will ask you to align the screen. Kindly continue to tap the center of each cross (+) that appears and follow the screen instructions to complete the operation. If you feel that the position is not quite accurate while tapping on the screen, you follow the help for this section to align the screen again.

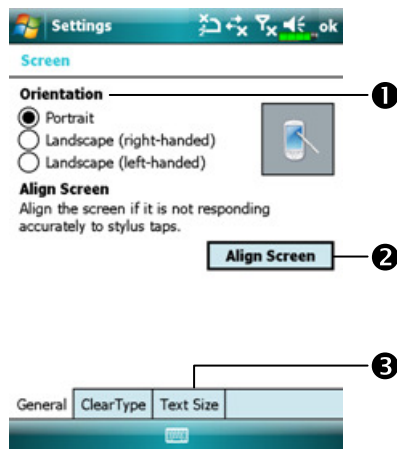

❶ Orientation:

Portrait (default)

Landscape (right-handed)

Landscape (left-handed)

❷ Tap the **Align Screen** button to calibrate the screen. When Align Screen appears, use the stylus to tap the center of the cross (+) until the next cross appears, then follow the screen instructions to complete the operation. Finally, tap **ok** to exit.


❸ **Text Size** tab: For selecting the desired text size.

The following steps will bring you into the touch screen calibration mode. These steps provide a faster and more efficacious way to enter the touch screen calibration mode. And they also provide a method of getting into **Screen** program for when the touch screen dislocation is so severe that you completely cannot select or do anything using the stylus.

1. Simultaneously press  on the bottom-left of the Pocket PC and the execution button in the center of the navigation pad.
2. Release these two buttons at the same time, and you will enter the calibration screen.

Today Screen

When you turn on your Pocket PC for the first time each day (or after 4 hours of inactivity), you will see the Today screen. You can also display it by tapping  > **Today**. On the Today screen, you can see at a glance the important information for the day.

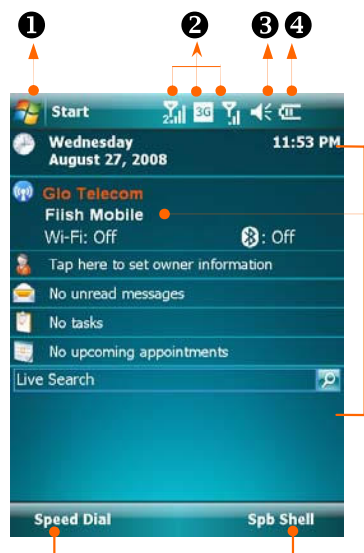

- ①  **Start.**, tap to switch to a program.
- ② Connection status icons, tap to view the connection details.
- ③ Speaker icon. For adjusting volume.
- ④ Current battery status.
- ⑤ **Communication Manager**
 - ⑥ Displays your dual phones status. When the name of service provider appears in orange, this phone is currently selected as the primary phone number when you make a call.
- ⑦ **Today** screen. Displays important information for the day. Tap on any item to enter its relevant setup screen.
- ⑦ Tap to quick link to **Speed Dial** or **Spb Mobile Shell**.

The following table lists the icons that you may see on the Navigation Bar. Kindly refer to the “Meaning” column for explanation or tap on the icon to access the instant message.

Icon	Meaning (Located on the Navigation Bar at the top of the screen)
	Speaker is on
	Ringer off
	Pending alarm
	Battery charging
	Battery level
	Low battery
	Battery power is very low
	Battery is fully charged
	New instant message
	New e-mail or text message (SMS)
	New MMS mail
	If there is not enough space on the screen to display all notification icons, tap this icon to view all icons.
	Active connection to computer
	Synchronizing
	Sync error
	PowerPoint slide show

Icon	Meaning (Located on the Navigation Bar at the top of the screen)
	Missing SIM1 card
	Missing SIM2 card
	Phone1 is turned off.
	Phone2 is turned off.
	Phone1 is turned on. Signal strength.
	Phone2 is turned on. Signal strength.
	Phone1 has not yet detected signal
	Phone2 has not yet detected signal
	No service. Phone1 has not yet connected to a network.
	No service. Phone2 has not yet connected to a network.
	Phone1 is searching for signal.
	Phone2 is searching for signal.
	Phone Voice call in progress
	Data call in progress
	Calls are forwarded
	Call on hold
	Missed call
	Roaming
	Bluetooth
	Wireless Active
	Wireless Data Calling
	Wireless in use

Icon	Meaning (Located on the Navigation Bar at the top of the screen)
	GPRS not in use
	GPRS available
	GPRS connected
	Synchronizing over GPRS in use
	EDGE available
	EDGE connected
	Synchronizing over EDGE in use
	3G network available
	3G connected
	Synchronizing over 3G in use
	3.5 G network available
	3.5 G connected
	Synchronizing over 3.5 G in use

G E 3G H represent the availability of various data connection services provided by SIM card you installed in **SIM1** slot. They are shown according to your monthly plans, telecom service provider, and network distribution conditions or effective system coverage area. To make modifications to your monthly plans, please contact your telecom service provider.

Programs

You can switch from one program to another by selecting it from the  menu. (You can customize which programs you see on this menu. For information, see “Adjusting Settings” section.) To access some programs, you’ll need to tap  > **Programs**, and then the program name.

Icon	Programs	Description
	Games Group	Bubble Breaker, Solitaire
	GPS Group	GPS Viewer, Location SMS, Satellite Data Update
	Multimedia Group	Album, Camera, Namecard Manager
	Office Mobile Group	Excel Mobile, OneNote Mobile, PowerPoint Mobile, Word Mobile
	Phone Group	Scenarios, SIM Manager, SMS Sender, Speed Dial
	Utilities Group	Application Recovery, Backup Utility, Default Settings, Memory Optimization
	Voice Commander Group	Voice Commander, Voice Commander Settings
	ActiveSync	Synchronize information between your Pocket PC and computer.
	Calendar	Keep track of your appointments and create meeting requests.
	Contacts	Keep track of your friends and colleagues.
	Notes	Create handwritten or typed notes, drawings, and recordings.
	Tasks	Keep track of your tasks.
	Messaging	Send and receive e-mail messages.

Icon	Programs	Description
	Internet Explorer	Browse Web and WAP sites, and download new programs and files from the Internet.
	Windows Live	MSN related programs.
	Messenger	Send and receive instant messages with your MSN contacts.
	Calculator	Performs basic calculations.
	Pictures & Videos	Take, view, and edit pictures.
	Windows Media	Plays movies or sound files.
	Streaming Player	Playback video or audio files from RTSP, HTTP etc.
	Internet Sharing	Simulate Pocket PC as a modem for the PC to surf the Internet.
	Search	Quickly find the information you need.
	File Explorer	Manages files or folders.
	Communication Manager	Manage wireless connections and related functions.

You can also switch to some programs by pressing a program button. Your Pocket PC has one or more program buttons located on the front or side of the Pocket PC. The icons on the buttons identify the programs they switch to. For more information, refer to "Redefine Hot Keys" section.

System Application Programs

Tap  > **Settings** > **Personal** tab

Program	Description
Buttons	Set the hot key for Pocket PC hardware button.
Input	Set the details about the input method.
Lock	Set the access rights and password of Pocket PC.
Menus	Set the items displaying on the  Start menu.
Owner Information	Input owner information.
Phone	Set the details about the phone.
Phone2	Set the details about the phone2.
Sounds & Notifications	Set the volume and notification method.
Today	Set the look of Today screen and display information.

Tap  > **Settings** > **System** tab

Program	Description
About	Display the important information about the Pocket PC.
Backlight	Set the details about the backlight and brightness.
Certificates	For network identification to prevent unauthorized access.
Clock & Alarms	Set the time and alarms.
Gravity Sensor Settings	The built-in gravity sensor is able to recognize how your hand manipulate this device and change the screen orientation accordingly.
Memory	View the memory usage, and the list of running programs, etc.
Microphone	Set the microphone volume.
Power	View the power usage condition, whether or not to power off after a waiting period.
Regional Settings	Set the region and information display formats such as date, time, etc.
Remove Programs	Remove programs that are no longer used.
Screen	Aligning the screen is helpful in determining the touch accuracy. You can select the portrait or landscape orientation.
System Information	View the system information.

Tap  > **Settings** > **Connections** tab


Program	Description
Beam	Set if receiving end will accept beam data automatically or not.
Bluetooth	Establish the connection between the Pocket PC and other Bluetooth capable devices.
Comm. Manager	Manage the connections of your device.
Connection Wizard	Select the appropriate country and carrier name.
Connections	Set the network connection.
CSD Type	Set Pocket PC to simulate a modem and access the Internet through the built-in GSM device.
Domain Enroll	Enroll your device in company's domain, in order to connect it to the System Center Mobile Device Manager .
USB to PC	Change the type of USB connection.

Spb Mobile Shell

Spb Mobile Shell has easy to use functions and tools to keep your Pocket PC organized for quick access. The program consists of the main window panels (**Now Screen**, **Spb Menu**, **Speed Dial**), Quick panel (smart taskbar gestures), **Spb Contacts** (smart contact search), Task Manager, color based themes, and improved usability for device locking.

Starting Spb Mobile Shell

- On the Today screen, tap **Spb Shell** to quick link to Spb Mobile Shell.
- Taskbar Smart Gestures: Tap-and-hold in the middle of the taskbar to launch **Spb Mobile Shell**.

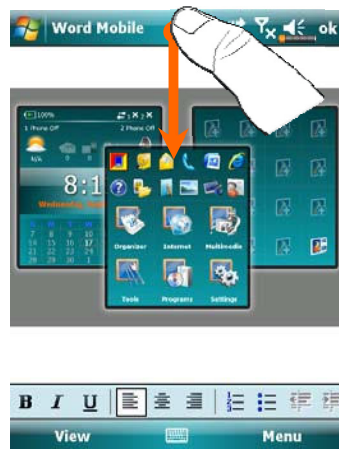


1. The taskbar smart gestures allow you to launch **Spb Mobile Shell** from any application you are in.

❶ Tap-and-hold in the middle of the taskbar while moving your finger in a downwards gesture.

❷ Select one of the panels and release when the gray popups window appears.

❸ If you release your finger outside the gray area then the highlight disappears and the panels launching is canceled.

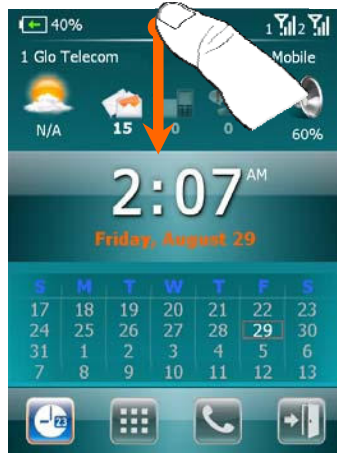

2. To return to the Today screen or the last active application, the following methods are available.

❶ Slide your finger in a downwards gesture.

❷ Tap .

Using Spb Mobile Shell



1. Now Screen panel: The **Now**

Screen gives you a quick and easy way to check your device status.

- ① Tap to select a city or open the weather details panel where you can update forecast or access the weather options.

- ② Tap to adjust the phone profiles on your Pocket PC.

- ③ Three icons for e-mail, SMS, Voice mail, and missed calls. For example, when you receive an e-mail you will see the e-mail icon highlighted with the number of new e-mails you have in your inbox. You can open your Inbox to read new e-mails with just a tap, or with a few key presses.

- ④ Displays your current time and date. Tap to open the time screen for more details.

- ⑤ Use the left/right gesture to switch between the main window panels.

- ⑥ The calendar displays the days that correspond to the selected month and year settings.


- ⑦ Tap soft keys to switch between the main window panels. Tap  to quit.



2. Spb Menu panel: Spb Menu


consists of two parts, smart launcher at the top (12 shortcuts) and six large phone style menu items below.

- 1 Tap to quick link.
- 2 The six large menu items not only show you what you have already on your Pocket PC but it also adds very useful tools under some categories.
- 3 Use the left/right gesture to switch between the main window panels.
- 4 Tap soft keys to switch between the main window panels. Tap  to quit.
- 5 Tap and hold on any of the 12 items and **Pin** your favorite items or select **Manage Pinned** to customize the smart launcher.





3. Speed Dial panel: The **Speed Dial** allows you to add up to sixteen photo contacts of your choice. You can also add a shortcut to the **Spb Contacts** on the panel.



1 Add your favorite contacts to the **Speed Dial** panel (applies only to entries stored in **Contacts** on your Pocket PC).


2 Tap the photo, name, or number of the contact whom you want to call.

3 Use the left/right gesture to switch between the main window panels.

4 Tap to link to **Spb Contacts**.

5 Tap soft keys to switch between the main window panels. Tap  to quit.

6 Tap and hold to open the context menu.

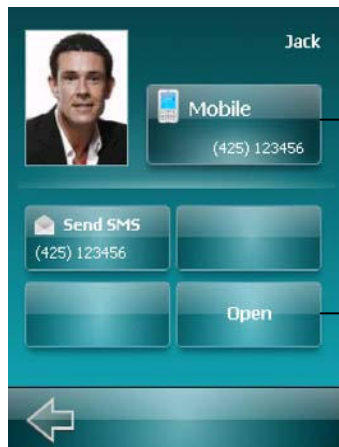

On the **Speed Dial** panel, tap the photo, name, or number of the contact whom you want to call. The contact panel of your selected contact is then displayed.

1 Select one of the phone numbers that you want to dial or send a text message.

2 Tap **Open** to view the contact full details card.



On the **Speed Dial** panel, tap . The **Spb Contacts** panel is then displayed. When you start entering a phone number or contact name, **Spb Contacts** will automatically search and sort the contact entries that match the sequence you have entered. You can then select the desired number or contact from the filtered list to dial.

Configuring Spb Mobile Shell

- On the Spb Menu panel, tap **Settings** category > **Spb Mobile Shell**.
- Tap  > **Settings** > **System** tab > **Spb Mobile Shell**.



1. **Now Screen** tab: Customize options on your **Now Screen** display.

Show the Now Screen when device wakes up: Enable this option to show the **Now Screen** each time you wake your device from the standby mode.



2. **Advanced** tab: Customize **Spb Menu** and **Now Screen** advanced options.

3. On the menu of **Advanced** tab, tap **Menu** to open the customization dialog of the six large menu items of the **Spb Menu** panel.



① **Spb Menu** tree.

② Provides the relevant menu.


You can **Move Up**, **Move Down**, **Edit**, **Remove**, **Add** and open the **Menu Option** for any of the **Spb Menu** tree items.

Communication Manager

Communication Manager will assist you to manage the wireless connections of the Pocket PC including **Phone1**, **Phone2**, Bluetooth, WiFi and data connection.

You can access **Communication Manager** by these methods:

- On the Today screen, tap. 
- On the Today screen, tap the connection status icons on navigation bar, when the message window appears, tap Comm. Manager.
- Tap  > **Programs** > **Comm. Manager**

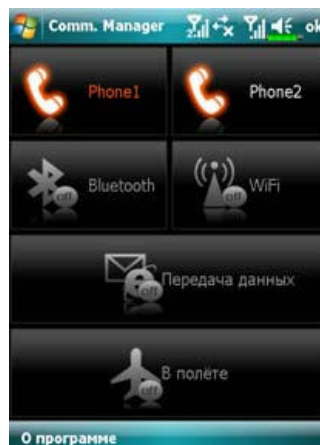

Switching a Connection On / Off

On **Communication Manager** screen, single tap on these buttons to activate or disable each individual functions.

- The  icon indicates that the associated function is currently in the off state. For example, tap  , when it becomes  , the GPRS connection is available.
- Tapping these buttons will turn the icons orange, indicating that these functions are newly activated.
- To turn off these functions, simply tap on the buttons once again.


Note

You can enable **Data Connection** only when a 3G/GPRS SIM card in **SIM1(3G)** slot and **Phone1** is pre-activated.

Managing Dual SIM Cards on a Single Device


You can have two numbers activated simultaneously on this device as if carrying two cell phones. Every time you call out or send a message, you may choose the network at the most economical rate while receiving with the other number freely.

In **Communication Manager**, tap **Phone1** or **Phone2** icon to activate the SIM card you have installed in the corresponding slot.

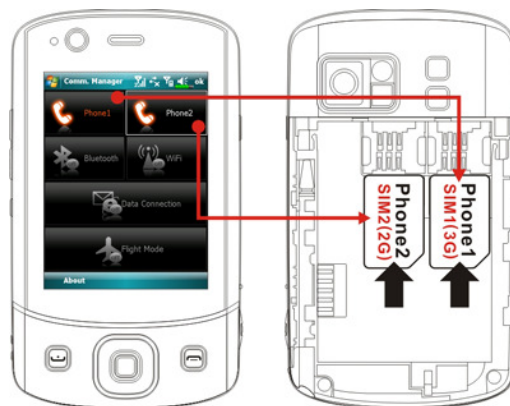

SIM1(3G) card slot is dedicated for SIM cards enabling data services over cellular network. To use video call, web-browsing, MMS or E-mail services, please install a 3G/GPRS compatible SIM card in this slot, and activate **Phone1**.

SIM2(2G) card slot allows only the GSM services like voice call, text messaging and emergency number (in most countries) that your SIM card supports. To start using it, install any 2G SIM (a 3G SIM card may do) in this slot and activate **Phone2**.

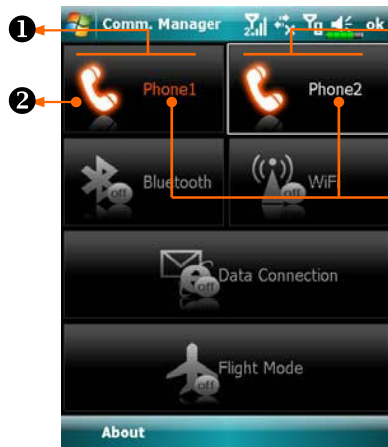

- ❶ **Phone1:**
Connection status of SIM stored in SIM1(3G) slot.
- ❷ As the SIM is successfully activated, the telephone receiver symbol will turn from dim grey to glowing orange, and you may receive incoming calls and messages on this number
- ❸ **Phone2:**
Connection status of SIM stored in (SIM2)2G slot.
- ❹ When the text "Phone1"/ "Phone2" is in orange, it indicates this number is currently selected to send outgoing calls when you press .

Flight Mode

You can enter Flight Mode in which all the wireless connections are disabled if your are to save down battery power or in occasions where wireless connections are prohibited like on a flight, at a medical facility, or at a gas pump.

Launch the **Communication Manager** and then tap the  button. When the color of the icon turns orange , the Flight Mode is activated and the wireless connections of the Pocket PC are all disabled.

Enter Information on Your Pocket PC

You have several options for entering new information:

1. Use the input panel to enter typed text, either by using the soft keyboard or other input method.
2. Write directly on the screen.
3. Draw pictures on the screen.
4. Speak into your Pocket PC microphone to record a message.
5. Use synchronization tools to synchronize or copy information from your desktop computer to your Pocket PC. For more information, see Help on your desktop computer.

Enter Text Using the Input Panel

Use the input panel to enter information in any program on your Pocket PC. You can either type using the soft keyboard or write using **Letter Recognizer**, **Block Recognizer**, or **Transcriber**. In either case, the characters appear as typed text on the screen.


To show or hide the input panel, tap the Input Panel button. Tap the arrow next to the Input Panel button to see your choices.



❶ Select an input method.

❷ Tap to see your choices.


❸ Input Panel button.

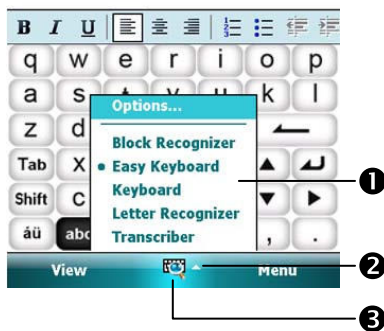

When you use the input panel, your Pocket PC anticipates the word you are typing or writing and displays it above the input panel. When you tap the displayed word, it is inserted into your text at the insertion point. The more you use your Pocket PC, the more words it learns to anticipate.



❶ Tap here if this is the right word.

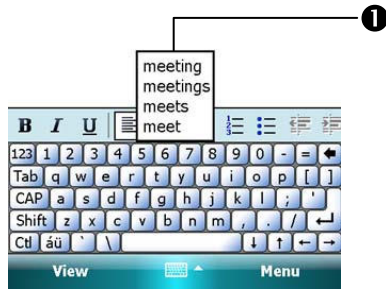

Note

To change word suggestion options, such as the number of words suggested at one time, tap  > **Settings** > **Personal** tab > **Input** > **Word Completion** tab.

Type with the Soft Keyboard

- 1 Tap the arrow next to the Input Panel button and then **Keyboard**.
- 2 On the soft keyboard that is displayed, tap the keys with your stylus.

Use Letter Recognizer

With Letter Recognizer you can write letters using the stylus just as you would on paper.

- 1 Tap the arrow next to the Input Panel button and then **Letter Recognizer**.
- 2 Write a letter in the box.

When you write a letter, it is converted to typed text that appears on the screen. For specific instructions on using **Letter Recognizer**, with **Letter Recognizer** open, tap the question mark next to the writing area.

Use Block Recognizer

With Block Recognizer you can input character strokes using the stylus that are similar to those used on other Pocket PCs.

1. Tap the arrow next to the Input Panel button and then **Block Recognizer**.
2. Write a letter in the box.

When you write a letter, it is converted to typed text that appears on the screen. For specific instructions on using **Block Recognizer**, with **Block Recognizer** open, tap the question mark next to the writing area.

Use Transcriber

With **Transcriber** you can write anywhere on the screen using the stylus just as you would on paper. Unlike **Letter Recognizer** and **Block Recognizer**, you can write a sentence or more of information. Then, pause and let **Transcriber** change the written characters to typed characters.

1. Tap the arrow next to the Input Panel button and then **Transcriber**.
2. Write anywhere on the screen.

For specific instructions on using **Transcriber**, with **Transcriber** open, tap the question mark in the lower right hand corner of the screen.

Select Typed Text


If you want to edit or format typed text, you must select it first. Drag the stylus across the text you want to select. You can cut, copy, and paste text by tapping and holding the selected words and then tapping an editing command on the pop-up menu, or by tapping the command on the **Menu** menu.

Write on the Screen

In any program that accepts writing, such as the **Notes** program, and in the **Notes** tab in **Calendar**, **Contacts**, and **Tasks**, you can use your stylus to write directly on the screen. Write the way you do on paper. You can edit and format what you've written and convert the information to text at a later time.

Write on the Screen

Tap **Menu** and then check **Draw** to switch to writing mode. This action displays lines on the screen to help you write.

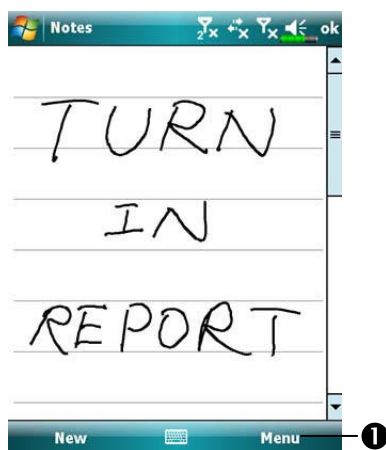

❶ Tap **Menu** and then check **Draw**.

Use your stylus like a pen now.

Note

Some programs that accept writing may not have the **Draw** function. See the documentation for that program to find out how to switch to writing mode.

Select Writing

If you want to edit or format writing, you must select it first.

1. Tap and hold the stylus next to the text you want to select until the insertion point appears.
2. Without lifting, drag the stylus across the text you want to select.

If you accidentally write on the screen, tap **Menu**, then **Undo** and try again. You can also select text by tapping **Menu** and then **Draw** to deselect it and then dragging the stylus across the screen.


You can cut, copy, and paste written text in the same way you work with typed text: tap and hold the selected words and then tap an editing command on the pop-up menu, or tap the command on the **Menu** menu.

Draw on the Screen

You can draw on the screen in the same way that you write on the screen. The difference between writing and drawing on the screen is how you select items and how they can be edited. For example, selected drawings can be resized, while writing cannot.

Create a Drawing

Cross three ruled lines on your first stroke. A drawing box appears. Subsequent strokes in or touching the drawing box become part of the drawing. Drawings that do not cross three ruled lines will be treated as writing.

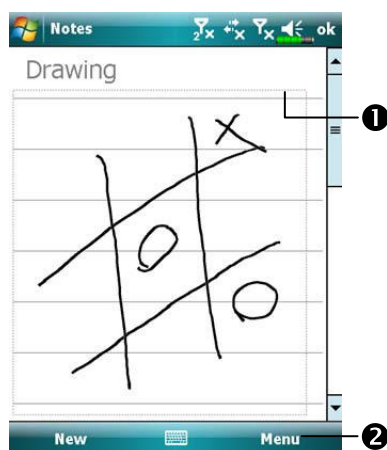

- ❶ The drawing box indicates the boundaries of the drawing.
- ❷ Tap **Menu** and then check **Draw**.

Note

You may want to change the zoom level so that you can more easily work on or view your drawing. Tap **Menu**, **Zoom** and then a zoom level.

Select a Drawing

If you want to edit or format a drawing, you must select it first. Tap and hold the stylus on the drawing until the selection handle appears. To select multiple drawings, tapping **Menu** and then **Draw** to deselect it and then drag to select the drawings you want.

You can cut, copy, and paste selected drawings by tapping and holding the selected drawing and then tapping an editing command on the pop-up menu, or by tapping the command on the **Menu** menu. To resize a drawing, make sure the **Draw** function is not selected, and drag a selection handle.

Record a Message

In any program where you can write or draw on the screen, you can also quickly capture thoughts, reminders, and phone numbers by recording a message. In **Calendar**, **Tasks**, and **Contacts**, you can include a recording in the **Notes** tab. Refer to "Voice Recording Format" section.


In the Notes program, you can either create a stand-alone recording or include a recording in a written note. If you want to include the recording in a note, open the note first. In the Inbox program, you can add a recording to an e-mail message.

Create a Recording

1. Hold your Pocket PC's microphone near your mouth or other source of sound.
2. Press and hold the **Record** hardware button on your Pocket PC until you hear a beep.
- 3 While holding down the **RECORD** button, make your recording.
- 4 To stop recording, release the **RECORD** button. Two beeps will sound. The new recording appears in the note list or as an embedded icon.


Note

You can also make a recording by tapping the **RECORD** button on the Recording toolbar. To play a recording, tap it in the list or tap its icon in the note.

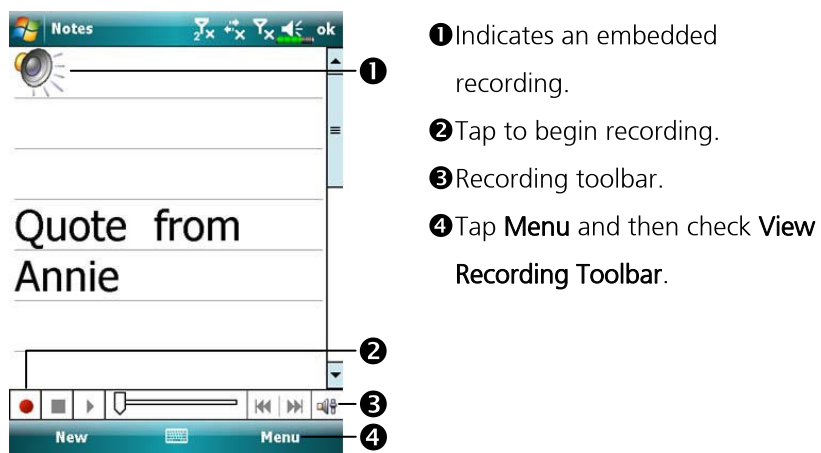


Voice Commander

By default, the system sets the button on the side of the Pocket PC as the “**Voice Commander** button.” Press this button to launch the **Voice Commander**. For details on how to use this function, please refer to the Voice Commander section.

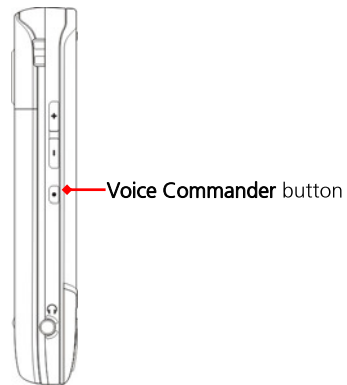

3 Voice Command and Satellite Navigation

Navigation Device Installation

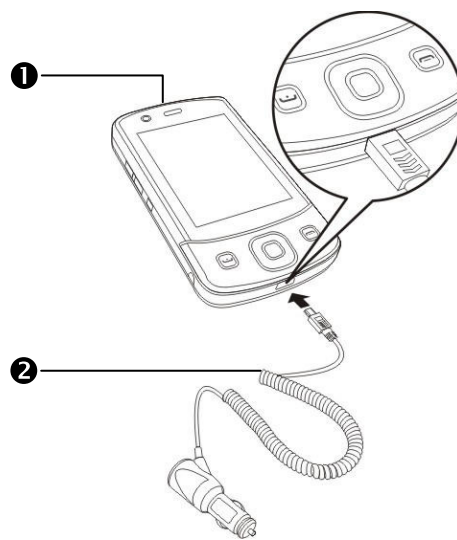

❶ Pocket PC

❷ Car Charger (* optional): when Pocket PC is low on power, recharge by connecting one end to the car cigarette lighter/12 volt power outlet and the other end to the socket on base of Pocket PC.

Attention: The GPS signal receiver is built into the Pocket PC. If car windscreen has heat reflective metallic film, or Pocket PC is obstructed by objects, then the receptivity of the GPS will be adversely affected.


GPS Navigation Software Installation

Please follow your car navigation system operating manual's instructions on software installation in order to use the navigation function.

Conditions for Using GPS Car Navigation

By using this system you are agreeing to the following conditions:

1. When using this device, please use with matching car mounts. Affix device securely to the car mount. Please be aware that installation in the areas depicted below is forbidden and is strictly prohibited.

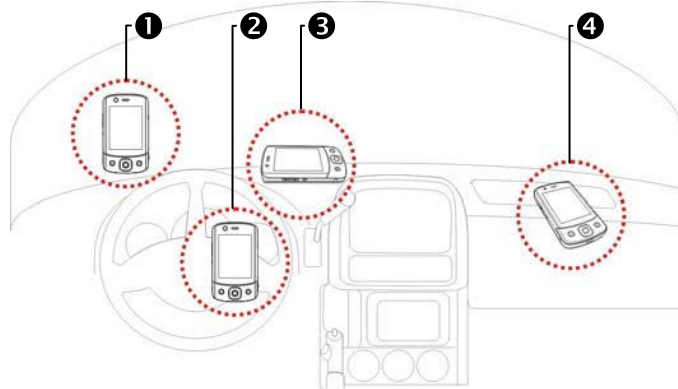

- ❶ Do not place where it will obstruct driver vision
- ❷ Do not place over air bag
- ❸ Do not place where it can not be securely attached
- ❹ Do not place in path of activated air bag

2. Please set navigation destination before driving. Do not operate this system while driving.
3. Please use this system with care. If any harm results from careless use of this system, the responsibility for safe driving resides with the driver.
4. GPS positioning is limited by weather and usage location (tall buildings, tunnels, underpasses, trees, bridges). Most GPS do not work indoors, nor can GPS signals penetrate buildings, car sun shades and heat reflective film with metallic content. Please install GPS outdoors with clear line of sight. Beneath the windscreen at the front of the car is a common choice, and the windscreen should be free of heat reflective film.
5. The GPS system is built and operated by the U.S. Department of Defense which is also responsible for its maintenance and calibration. Any changes made by them may affect the operation and accuracy of the GPS system.
6. Wireless devices (mobile phones, speed radar detectors) will all interfere with the satellite signal and cause unreliable signal reception.
7. The GPS position fix is provided only for the driver's reference and should not affect actual driver behavior.
8. The electronic map data provided in the navigation system is for normal reference only and not intended for high precision applications. The user should determine their exact location based on actual road conditions.
9. The route provided by the navigation system, the audio cues and intersection data are derived from recommended optimal route calculated using the electronic map data. This is provided for the driver's reference only, the driver should decide their chosen route according to actual road conditions.
10. When not in use, please do not leave the device inside the car. If exposed directly to sunlight, the battery may overheat and cause damage to this device. This may endanger the vehicle as well.

Satellite Data Update (Not supported in USA)

Tap  > **Programs** > **GPS** > **Satellite Data Update**.

Login to the provider's server to download instant satellite data and enable the GPS function. Note: either of the following connections allows your Pocket PC to download the latest GPS data. If there is more than one connection available, the system will automatically select the best connection, in the following order:

1. Synchronization connection: Connect your Pocket PC to a PC (Desktop or Notebook). Please note that your PC must be online.
2. Wireless LAN connection.
3. GPRS connection: Roaming mode cannot update GPS data automatically. If necessary, change to manual mode.




☛ The system will update GPS data automatically based on a schedule. Follow these steps:

- 1 Check the **Auto Update** checkbox.
- 2 Set the date.
- 3 Set the time.
- 4 The text shows the expiration date of the GPS data. On the due date, the system will pop up a warning message. Refer to the following instruction about the **Today** screen.



Tap the **Download** button to update the GPS data manually. The figure on the left shows how to download using the synchronization connection.

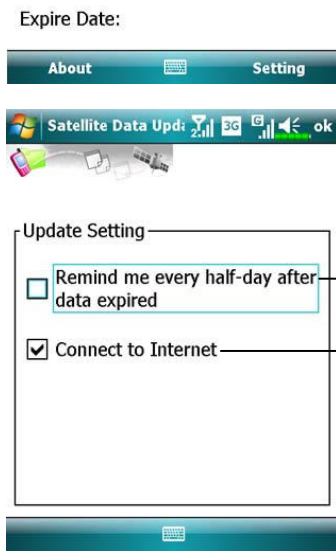


Tap the **Setting** button in the **Satellite Data Update** main screen to open the dialog in the left figure.

- ① Check the expiration checkbox to activate the reminder function on the due date.
- ② The default value is checked. The system will automatically update the data when online. Costs will be incurred when connecting over the GPRS, so consider carefully before activating this function.

After setting your Pocket PC to the following connection mode and activating the automatic update and Internet connection functions, the system will automatically download the latest GPS information periodically.

1. Synchronization connection. Make sure that your Pocket PC is connected to the PC, and that the PC is online.
2. Wireless LAN connection.
3. GPRS connection.

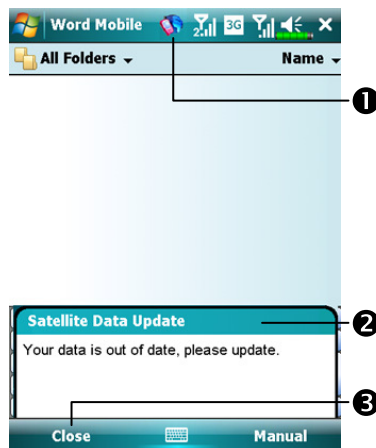

☞ When the GPS data has expired, the relevant message displays on the top of the screen.

❶ The icon reminds you that your GPS data has expired.


❷ Tap the **Notification** button to open the message window.

❸ Tap to close the message window.

Location SMS

Tap  > **Programs** > **GPS** > **Location SMS**.

You can utilize the GPS function offered by your Pocket PC, to send the matching location automatically found by this program and the necessary message to your contacts. This could be helpful in preventing kidnapping, reporting disastrous situations, calling for help in emergencies or locating an individual. In addition, we have formulated many SMS templates based on different situations for your convenience.

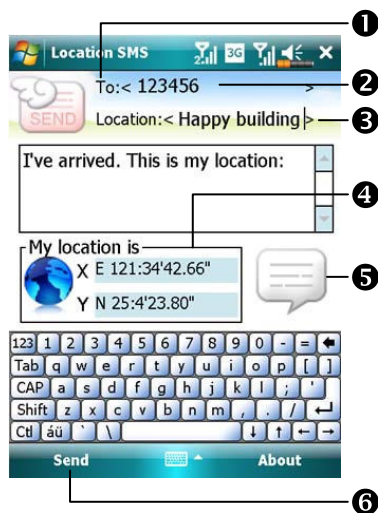

1. It is better to execute this program at a location with clear signal.

1 Tap to open the **Contacts** screen, if set up in advance, you can choose contacts directly.



2 You can directly enter mobile phone number in the **To** area. If there is more than one recipient, please use ";" to separate recipients.

3 You can directly enter your message in this area, such as landmarks, features or street names.

4 Automatically searches for GPS information.

5 Tap to allow you to select, add, edit, or delete your most used messages.

6 Tap to allow you to send SMS messages and report your location.

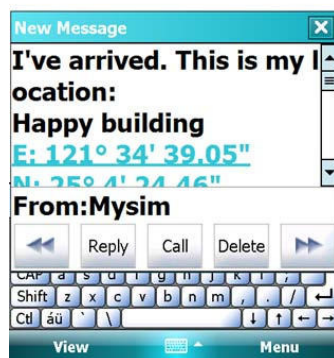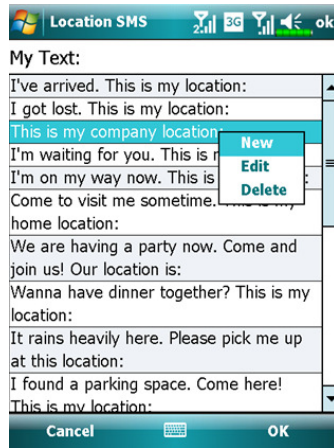

1. Select  in the main screen, once in the screen shown on the left, tap on any message and tap OK button to select.
2.  Further, by pressing and holding anywhere on the screen, together with the pop-up menu, you can add, edit or delete your most used messages.
3. The content of the message that your recipient views looks similar to what is shown on the left. Actual messages differ depending on the recipient's device.

GPS Viewer

Tap  > **Programs** > **GPS** > **GPS Viewer**.

You may use this Pocket PC to automatically search the GPS coordinates of your location and check if the GPS functions work properly.




1. Run this program in a location with good signal reception.

① Greenwich Mean Time (GMT): After connecting to a satellite and obtaining the GMT, it will be displayed on the screen. Tap to set the satellite time as the system time.

② Report GPS tracking information.

③ Tap to change the unit.

④ Switch to Satellite mode.

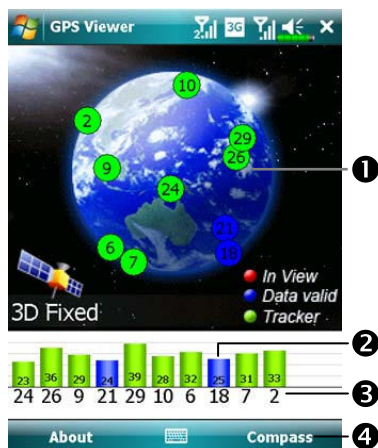

2. Tap **Satellite** to switch to Satellite mode.

① Red: Satellite detected (In View).
Blue: Satellite data detected (Data Valid).
Green: Tracking completed (Tracker).

② Signal strength: The larger the figures, the stronger the signal.

③ Satellite ID: The IDs expressed in numbers in this field correspond to the IDs on the earth image above.

④ Switch to Compass mode.

4 Using the Phone

The Phone feature on the Pocket PC allows you to perform the following tasks:


- Capability of carrying dual SIM cards.
- 3.5 G video telephony.
- Make and receive calls.
- Quickly make calls or listen to voice mail without entering phone numbers using **Contacts**, **Speed Dial**, or your **Call Log**.
- Check the **Call Log** to see who has called, whom you have called, add a new number to **Contacts**, and access notes taken while you were on a call.
- Receive calls and easily take notes during the call.
- Send SMS messages.
- Customize how your phone rings.

To switch to the Phone function, press  on the lower part of the Pocket PC or tap  > **Phone**.

Cautions

- To avoid distraction and affecting driving safety, never use your Pocket PC while driving an automobile or any other moving vehicle.
- Make sure that the SIM card is properly installed in your Pocket PC and the Phone is already turned on before you use the functions described in this section.

- When aboard an aircraft, at a medical facility, or at the gas pump where wireless communication devices are prohibited, please launch the Communication Manager and then tap the  button. When the color of the icon turns orange , the Flight Mode is activated and the wireless connection of the Pocket PC is disabled.
- The Phone function relies on the Pocket PC main battery for power. Maintain the main battery power level to assure call quality and the normal operation.

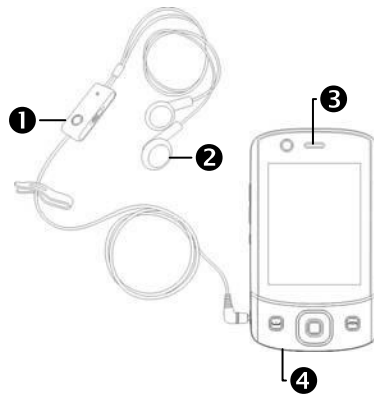


- ❶ Microphone ❷ Earphone
❸ Phone Receiver ❹ Phone Speaker (Bottom of Pocket PC)

Precautions!

- Avoid wearing earphones at high volume for extended periods of time.
- Avoid wearing earphones while driving, cycling or in other situations where quick reactions are required.

Combination Method	Operation	Answer or End a Call	Adjust Earphone Volume
Hold the Pocket PC manually for calls	Hold the Pocket PC and position the receiver close to your ear and the speaker close to your lips.	Press  or  on the lower part of the Pocket PC.	While answering a call, push the volume control key on the side of the Pocket PC to test the earphone volume.
Install the external headset	Place the earphone in your ear and position the microphone to your lips.	Use the line control function. Press and hold the button on the headset to answer or end the call. Except the Bluetooth headset, when the phone is ringing, hold down the button to reject the incoming call.	--

Adjusting the Phone Volume

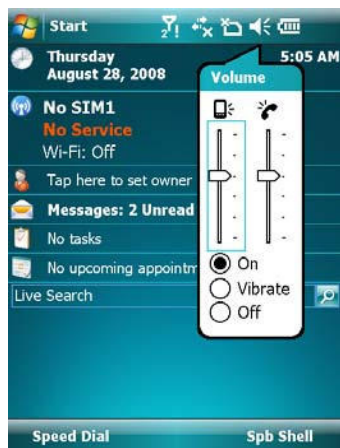

Tap  on the top and adjust all programs' sound functions under . Adjust the phone sound volume under .

1. When there is no call, you can push the volume control key on the side of the Pocket PC or use the stylus to tap the speaker icon

Tap  and then  to adjust the ring volume of the incoming call.

2. Push the volume control key on the side of the Pocket PC or tap  and then  to adjust the phone volume. You can only do this during a call.

3. Vibration mode: The speaker icon  on the top changes to .

4. Mute mode: The speaker icon  on the top changes to .

Adjust the proper volume

1. If earphones are used with the Pocket PC to make calls, set the volume according to actual personal needs.
2. If earphones are not used with the Pocket PC and not held close to the ear for calls but similar to hands-free operation, it is recommended to set the sound volume for the top two levels.
3. For holding the Pocket PC close to the ear directly for calls, it is recommended that you set the volume to the lower four levels. It is recommended not to use the top two levels because the volume is high and may affect your hearing.

Turn on or turn off the speakerphone


1. Enable the speakerphone: While answering a call, tap **Speaker on** to turn on.
2. Disable the speakerphone: Tap **Speaker off** to turn off.

Phone Functions

Turning on Your Phone(s)

Before using phone functions, please install you SIM card(s) and turn the phone(s) on.

1. On the Today screen, tap  or  , when the message window appears, tap **Comm. Manager**.
2. Or tap  to launch **Communication Manager**.
3. In **Communication Manager**, tap the phone your desire, and follow the onscreen instructions to activate it. You may be requested to enter a preset t PIN (Personal Identification Number) which is usually a four-digit code. If PIN is entered incorrectly three times, your SIM will be blocked, please obtain the PUK (Personal Unblocking Key) from your service provider to unblock the SIM.

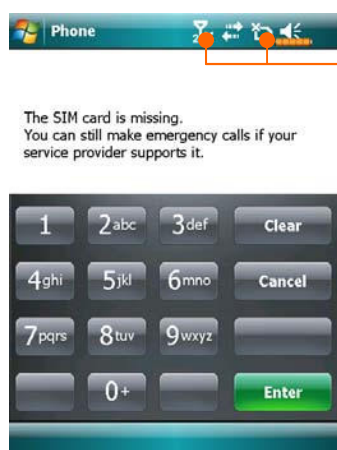

Phone connection status

-   The SIM card is missing
-   The Phone is off
-   Searching for network
-   No network service
-   The Phone is active

4. As the icon  or  appears at the top of the Today screen, you can start using the phone functions.

Making a Call

On the Today screen, tap  > **Phone** or press .

To make a call, use the screen keypad to enter the phone number and tap  to place the call on **Phone1** or  to place the call on **Phone2**.



The screenshot shows the Phone app interface. At the top, there are two service provider names: 'Glo Telecom' (labeled 1) and 'Fiish Mobile' (labeled 2). Below them is a list of contacts: 'Leo' (labeled 3) and 'jeng, Francesca.' (labeled 3). A numeric keypad is visible at the bottom (labeled 4). To the right of the keypad are two call buttons: 'Talk2' (labeled 6) and 'Talk1' (labeled 7). A 'Menu' button is at the bottom right (labeled 8). A 'Backspace' button is located above the 'Talk2' button (labeled 5). A 'Hide Keypad' button is at the bottom left (labeled 4).

- 1 Phone1**
Service provider name
- 2 Phone2**
Service provider name
- 3 Contacts display area**
List of people you lately contacted with.
- 4 Hide Keyboard**
Tap to expand the contacts display area, and tap it again to restore the keyboard
- 5 Backspace**
If you enter a wrong digit, tap to clear it; you can tap and hold to clear the whole number.
- 6 Phone2 Call button**
- 7 Phone1 Call button**
- 8 Menu**
Tap to enter more phone functions

Selecting the primary phone line

By activating two SIM numbers on your device, you can make calls via either number.

If one of the SIM numbers is used more frequently, you can assign it as the primarily-used number through **Phone Dialer Selection**. Hence, when a call is made by your pressing  or launching a dialing action from any application, this call will automatically be made via the pre-selected number.

On the Today screen, tap  > **Phone** or press , tap **Menu** > **Phone Dialer Selection**, and choose a Phone as the selected primary number.

Note

If only one SIM number on your device is activated, this number will be the primary number when you make calls, and **Phone Dialer Selection** is thus enabled.



Making a call on either number

You can always select your desired number to make a single call at will. If selected, the service provider name of this number will turn orange on the Today screen. Next time you place a call by directly pressing  in certain applications such as **Contacts**, **Call History**, **Speed Dial** or **Messaging**, this call will be made on this selected number.

On the Today screen, press  to enter **Phone** screen.

On **Phone** screen, after entering a telephone number or choosing a contact, you can make a call on either number by:

- Tapping  to place the call on **Phone1** or  to place the call on **Phone2**.

Or

- Pre-assigning one of your two numbers as the primary number to make outgoing calls:

Tap **Menu > Phone Dialer Selection** and choose the phone line, then you'll only have to press  to make a call on this selected number.

Note


If you tap  or  without activating the corresponding SIM beforehand, you will be asked to complete the activation process in order to make this call.

Making a phone call from Contacts

You can quickly locate stored phone numbers in **Contacts** and make calls. If you dial out by pressing  or tapping **Call** on the screen, this call will be made using the current selected number. You can always tap **Menu > Phone Dialer Selection** to change the current selected number.

On the Today screen, tap  > **Contacts**


- Find the contact you want to call, and press . You can tap **Menu > Phone Dialer Selection** to change the current selected number.
- If this contact has more than one number, tap and hold on the contact, and choose the number to call.

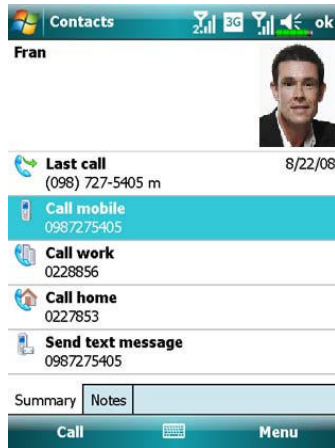


Making a call from Call History

On the Phone screen, tap **Call History**.

1. To sort out call entries by different methods, tap **Menu** and then **Filter** to list the categories.
2. Find the number you wish to call, tap **Call** or press  to call using the current selected number. You can tap **Menu > Phone Dialer Selection** to change the current selected number.

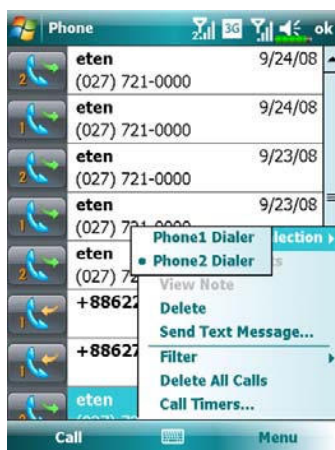

3. To view the number of calls, call time and manage call records, tap Menu and then **Call Timers**.

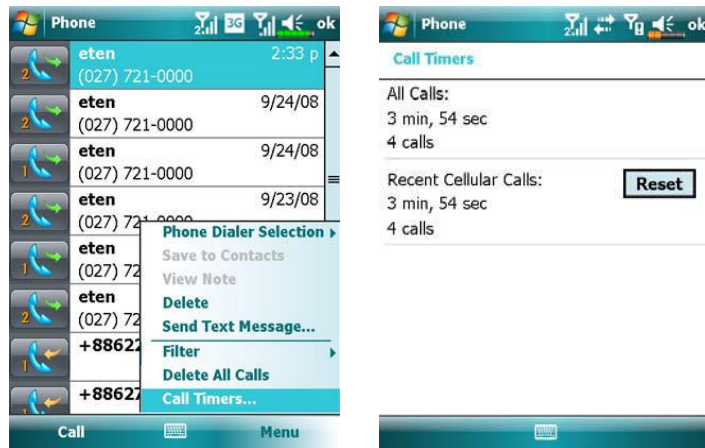

Answering / Ignoring a Call

Upon receiving an incoming call, a window will pop up.

1. To answer this call, tap **Answer** or press .
2. To ignore this call, tap **Ignore**.

The headline shows which phone on your device is being called.



During the call, you can tap buttons on screen to execute several functions



- 1 Mute the microphone
- 2 Turn on/off the speaker
- 3 Create a note for the call
- 4 Return to Phone screen
- 5 Go to **Contacts**
- 6 Hold the current call
- 7 End the current call
- 8 More phone options like setting up a **Conference** call or switching to **Hand-free** mode

Note

If a call enters one SIM number while the other SIM number is already on a call, a pop-up window will inform you of the new incoming call, tap **Answer** to answer it, which will hang up the previous call in the meantime; or tap **Ignore** to hang up the new incoming call.

Ending a Call

During a connected call, you can tap **End** or press  to hang up. As a screen of Last Call detail shows, you can tap **Talk1** or **Talk2** to redial to this contact.



Video Call


Video Call enables you to see a real-time, two-way video of the other party during a call.

To establish an instant video call with your device, make sure:


- You are using a 3G SIM card in the coverage of network.
- The other party is equipped with a compatible device and service system.

Making a video call

1. On Phone screen, Select your contact and tap **Menu > Video Call**.

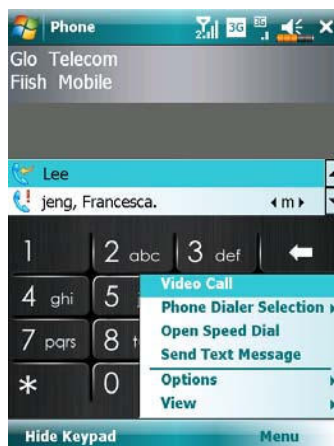

2. After dialing out, you will have to wait for a few seconds until video images of both parties are shown on your screen. If this video call fails to get connected, a window will pop up asking to redial or make a voice call.
3. As the video call is set up successfully, you may access several options during this call:

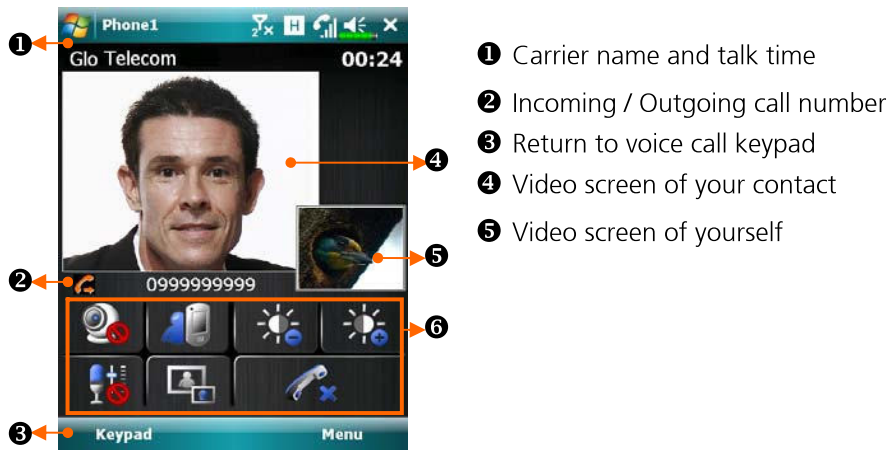

- ❶ Carrier name and talk time
- ❷ Incoming / Outgoing call number
- ❸ Return to voice call keypad
- ❹ Video screen of your contact
- ❺ Video screen of yourself

❹ Video call control panel:

-  Stop sending your video
-  Switch to front/rear camera lens
-  Video brightness
-  Mute / Unmute microphone
-  Chang the layout of both party's screen
-  End the video call

4. To end the call, simply tap  on the Video Call main menu.

Receiving a video call

Upon receiving a video call, a window pops up to notify you that this is an incoming video call. If you tap **Answer**, your device will start sending your image to your recipient, tap  to stop showing the other party your image during the call.



Note

1. Please insert your 3G SIM card in **SIM1** slot, and activate **Phone1** before making or receiving a video call.
2. If the video call dial out is unsuccessful, it is possible to switch to normal voice calls.
3. **G E 3G H** represent the availability of various data connection services provided by SIM card you installed in **SIM1** slot. They are shown according to your monthly plans, telecom service provider, and network distribution conditions or effective system coverage area. To make modifications to your monthly plans, please contact your telecom service provider.

Customizing Your Phone

You can enter the **Phone** or **Phone2** settings page from  > **Settings** > **Personal** tab on the Today screen to modify the relevant service settings. Note that the setup values you can change here depend on the services provided by your telephone company. If you choose the phone that is not currently activated, you will have to activate it before entering the settings page.



- ❶ You can set the ring type as ring, vibration or mute.
- ❷ If you want to use a customized ring tone file, use the synchronization program on your desktop computer to copy the .wav ring tone file to the `\Windows\Rings` folder on the Pocket PC. You can then select this ring tone from the Ring tone list.
- ❸ Set the key sound for dialing.
- ❹ You can set a PIN (Personal Identity Number) to block unauthorized access to your phone. Your first PIN is provided by your phone service provider.

Phone Application Programs

Caution


Before you can use the functions described in the **Phone** Group. Make sure that the SIM card is properly installed in your Pocket PC and the Phone is already turned on.

If your Pocket PC does not include this function, it means it is not supported and you can skip this chapter.

SIM Manager

You can use **SIM Manager** to manage contact entries stored on your SIM cards, edit and copy contacts from SIM cards to your device, or vice versa.

Tap  > **Programs** > **Phone** > **SIM Manager**.

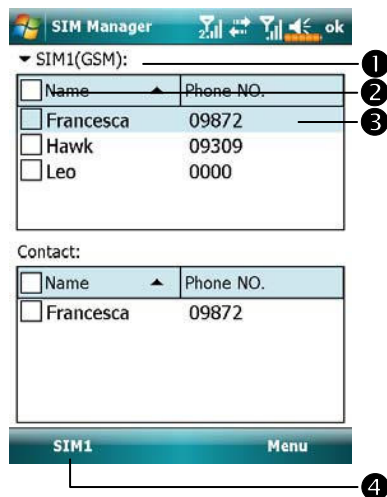

- ❶ Tap and hold to open a list to choose between **SIM1** and **SIM2**.
- ❷ Check the box to select all contact.
- ❸ **Contact entry**
Tap and hold to bring up a menu of contact options.
- ❹ Tap to switch among various display modes.

Change Display Mode

You can change the display mode of SIM Manager to **Standard**, **SIM1** Contacts, **SIM2** Contacts and Outlook **Contacts**.

When switching to **SIM1** or **SIM2**, the full screen display for SIM card phonebook or Contacts will be as shown as per the illustration below. This will enable the phonebook contacts to be easier to read and more precise management can be conveniently performed.



Copy Phonebook Information

You can copy contact entry from **SIM1**, **SIM2** or your device to one another.

1. Check the ☐ in front of a phonebook entry to select it.
2. On highlighted area, tap and hold to bring up a menu.
3. Tap **Copy to SIM1/SIM2** or **Copy to Contact**.

Note

If you copy an entry comprising multiple numbers to a SIM card, only one number will be copied to the target storage place under the contact name.

SIM Tool Kit

Tap  > **Programs** > **SimTKUI** (SIM Tool Kit).

This screen will list only the service menu offered by **SIM1** which you installed in **SIM1** slot.



➊

⌂ This screen is for reference only.

The actual screen is based on the service items provided by your telecom company.

➋ Tap any service item.

➌ **Select** button: Launch service item. Follow the screen or voice instructions.



➌


SMS Sender

Tap  > **Programs** > **Phone** > **SMS Sender**

SMS Sender is a shortcut for you to directly start editing a new text message and send it out.

To send a text message, on message composing screen:


1. Enter the recipient's number in **To** field, or tap **Menu** > **Add Recipient** to select a person from **Contacts**.
2. Enter the content of your message in text field.
3. Tap **Send**
4. On **Send via** screen, choose the SIM number that you'll use to send this message.

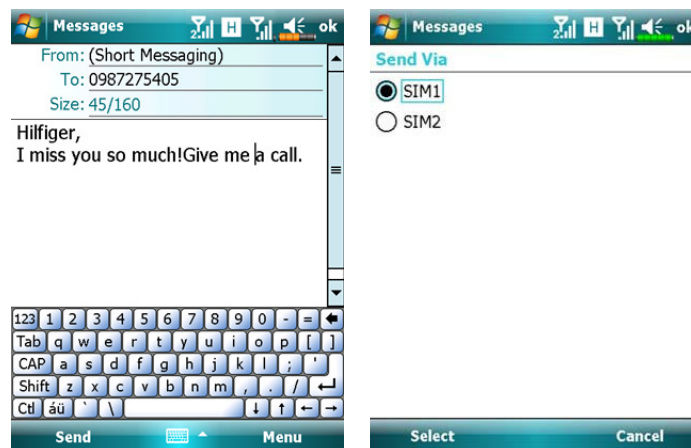

Speed Dial

Tap  > Programs > Phone > Speed Dial.


Hot Key Switch

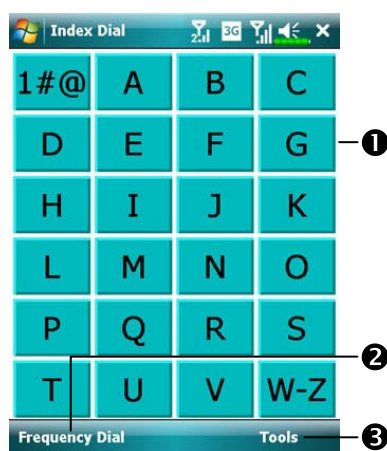

❶ Tap the box according to the functions provided by the system.

❷ Tap to switch between these functions: **Frequency Dial** → **Index Dial**.

❸ **Tools** button: Provides the relevant menu. For example, select **Settings** to set the interface as **Frequency Dial** or **Index Dial**. Select **Sound on/off** to set the sound for tapping the screen.

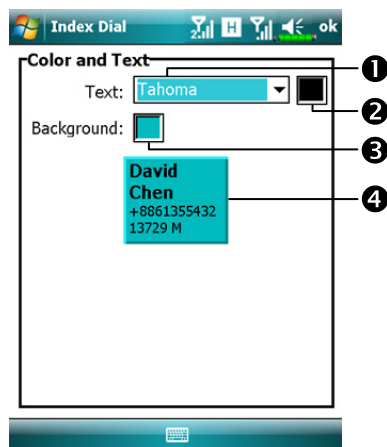

☐ Tap **Tools** and then **Color and Text** to enter the Setting screen shown on the left. You can set the text font, text color and button background color according to your personal preferences.


❶ Font

❷ Text color

❸ Button background

❹ Preview area

Frequently Dialed Screen

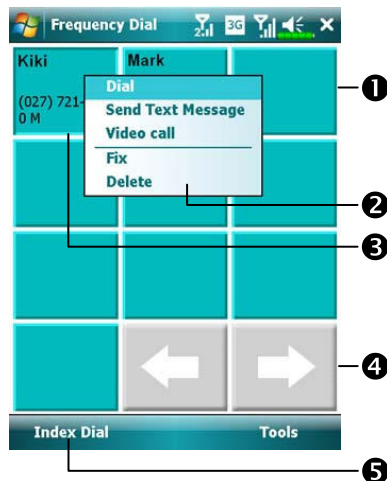

Frequency Dial screen

1 Tap any phone entry box to speed dial. You will make a call on the number currently selected by your device. To select the other number, press  to enter Phone screen, tap **Menu > Phone Dialer Selection**

2 Tap and hold the box, then select appropriate command from the pop-up menu.

3 Sort according to the number of calls in descending order. The upper left corner has the most number of calls while the lower right corner has the least number.


4  : Tap to view the previous or next page.

5 Tap to switch to the **Frequency Dial** screen as shown on the left.

Note

To make a video call from **Speed Dial**, please install your 3G SIM card in **SIM1** slot and activate **Phone1**.


Index Dial

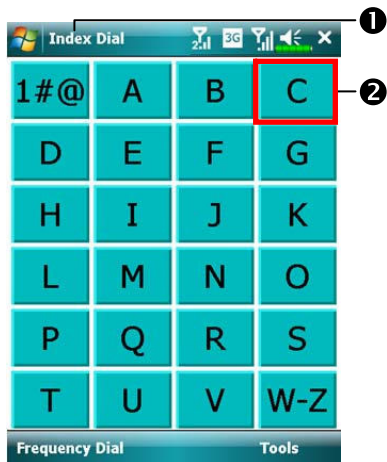

① Index Dial screen

① Switch to the Index Dial screen as shown on the left.

② Tap on any letters. The content displayed are the data created in **Contacts**. If you did not create any data in Contacts, the screen is blank.

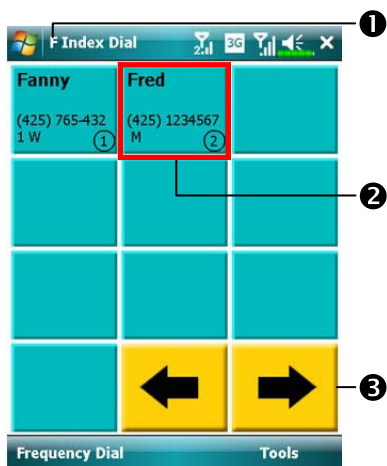

① The letter "F" appears on the upper left side of the screen (see left). This indicates that this page contains all address data that starts with "F". The English Address Book is arranged alphabetically using the First Name.

② Tap any box to speed dial.

③ ◀ ▶: Tap to view the previous or next page.

5 Customize Your Pocket PC

You can adjust the Pocket PC settings according to your personal preferences and install other programs.

Adjusting Settings

To see available options, tap  > **Settings** > **Personal** or **System** tab located at the bottom of the screen. The following utilities allow you to adjust the settings based on your personal work style.

- **Clock & Alarms**, to change the time or to set alarms
- **Menus**, to customize what appears on the  menu, and to enable a pop-up menu from the New button
- **Owner Information**, to enter your contact information
- **Lock**, to limit access to your Pocket PC
- **Power**, to maximize battery life
- **Today**, to customize the look and the information that is displayed on the Today screen

Notifications

Your Pocket PC reminds you in a variety of ways when you have something to do. For example, if you've set up an appointment in **Calendar**, a task with a due date in **Tasks**, or an alarm in **Clock & Alarms**, you'll be notified in any of the following ways:


- A message box appears on the screen.
- A sound, which you can specify, is played.
- A light flashes on your Pocket PC.
- The Pocket PC vibrates.

To choose reminder types and sounds for your Pocket PC, tap  and then **Settings**. In the **Personal** tab, tap **Sounds & Notifications**. The options you choose here apply throughout the Pocket PC.

Power Preference Settings

Tap  > **Settings** > **System** tab > **Power**.

View the power usage condition or perform the relevant power management settings.

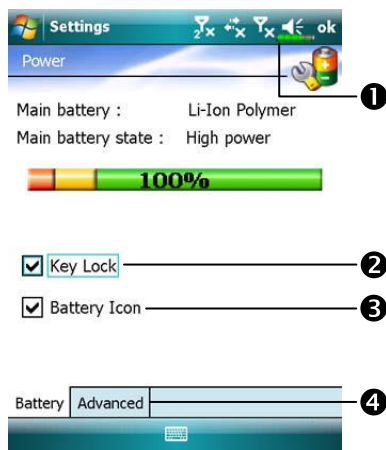


❶ Power icon

❷ Check this item, so that when you accidentally press the hardware buttons on the Pocket PC, the Pocket PC will not exit the sleep mode. This will prevent unnecessary power consumption if a button is being pressed accidentally and not being discovered in time.

❸ Checking this item displays the power icon on the upper right side of the screen.

❹ **Advanced** tab: Set the Pocket PC to turn off automatically after a period of inactivity.

Backlight

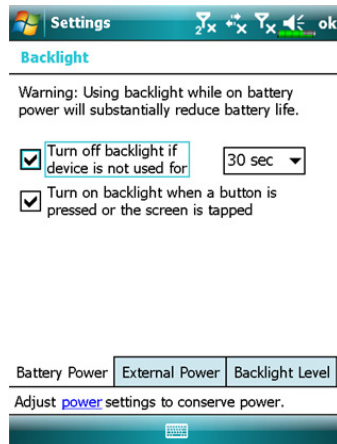


Tap  > **Settings** > **System** tab > **Backlight**.

1. **Battery Power** or **External Power** tab: Set the relevant backlight functions.
2. **Backlight Level** tab: Adjust the backlight level.

Light Sensor

The unique light sensor within your Pocket PC enhances the accuracy of onscreen view and decreases your eyestrain while saving on more battery life. Based on the ambient light intensity the sensor detected, it will adjust backlight brightness dynamically. The lighter the environment is, the more illumination the device outputs to brighten the screen; in a dusky place like a tunnel, the device dims the screen a bit to reduce power consumption.

Tap  > **Settings** > **System** tab > **Backlight** > **Backlight Level** tab.

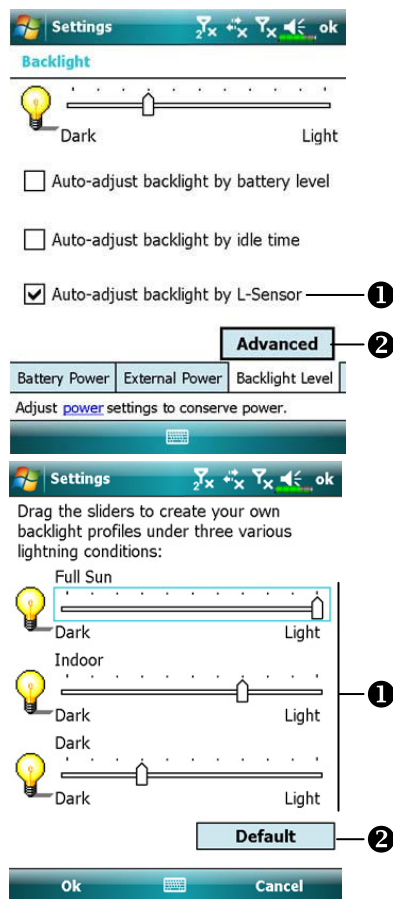

① Check “Auto-adjust backlight by light sensor” to activate the light sensor.

② Tap to set your own backlight profiles.


① Drag the slider under each of the three light conditions to set your own profile. Tap **OK** to save your settings.

② Tap to restore default settings.

Gravity Sensor

The gravity sensor in your Pocket PC is able to recognize its own orientation manipulated by your hand, and would so change the screen orientation accordingly. For example, if you position the device vertically and then turn it into a horizontal orientation, the screen mode will then change from portrait to landscape automatically.

Tap  > **Settings** > **System** tab > **Gravity Sensor**.

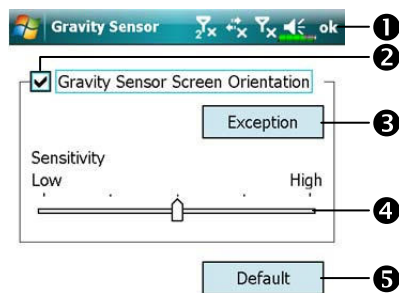


- 1 Tap **ok** to save settings.
- 2 Check "**Gravity Sensor Screen Orientation**" to turn on Gravity Sensor.
- 3 Tap to check applications in which gravity sensor will disable itself.
- 4 Drag the slider to adjust the sensitivity.
- 5 Restore to default system settings.



Microphone

Profile	Microphone	Cause
* Voice Commander	Turn the volume down and find the proper volume setting for better recognition of system.	Surrounding interference recorded when volume up.
Speech recording	Turn the volume up.	More distance from the lecturer more interference recorded.

* Used for the version built in "Voice Commander."

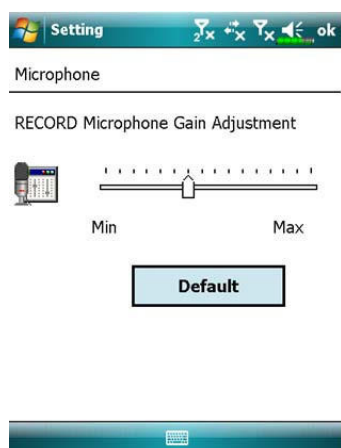

Tap  > **Settings** > **System** tab > **Microphone**.


1. Use the slider to adjust volume of the recording mic.
3. **Default** button: Restore to default system settings.

Note

This document lists the functions, specifications, and illustrations for reference only. The actual purchased product should be taken as the standard.

Adjust Volume

Push the volume control key on the side of the Pocket PC. Or use the stylus to tap the  icon on the top of the screen to adjust all program sound functions under . Adjust the incoming call's volume under .

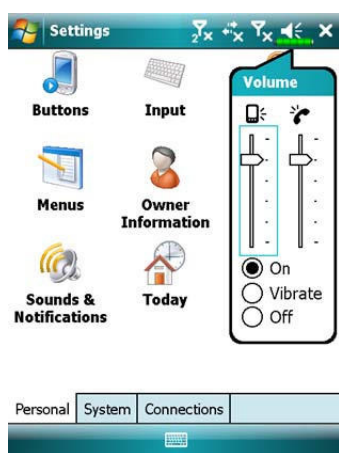


1. Adjust volume: When set to ☒ **On**, use the stylus to tap and drag the slider up and down to adjust the volume. You can also push  or  on the side of the Pocket PC.
2. Vibrate: Under ☒ **Vibrate** mode, the sound function of all programs will be replaced by vibration, including incoming call rings. The  icon on the top changes to .
3. Mute: Under ☒ **Off** mode, the sound function of all programs will be turned off, including incoming call rings. The  icon on the top changes to .

Memory Optimization

Tap  > **Programs > Utilities > Memory Optimization.**



Memory Optimization helps you to optimize the memory using in your Pocket PC.

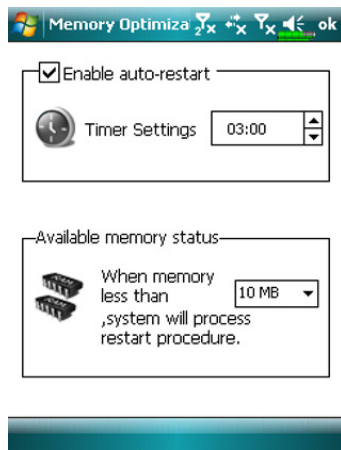

1. Enable the auto-restart option and select the timer.
Your Pocket PC will automatically restart.
2. Select the least memory.
Your Pocket PC will restart when the memory is less than your settings.

Scenarios

Tap  > **Programs** > **Phone** > **Scenarios**

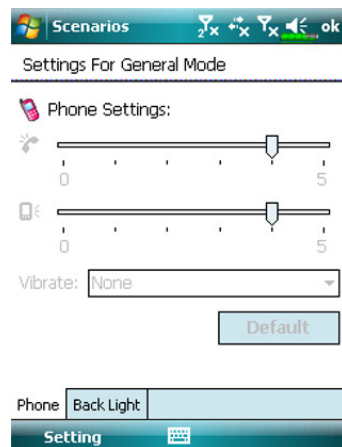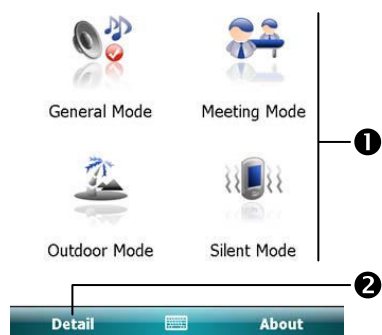

❶ Select an applicable mode.

❷ **Details** button: Set the relevant options for this mode, such as volume, backlight, etc.

⌂ Tap **Details** button to enter the screen shown on the left. And then tap **Settings** button to set the relevant options for this mode, such as volume, backlight, etc.

Find and Organize Information


The **Search** feature on your Pocket PC helps you quickly locate information.



1. Tap  > **Programs** > **Search**.
Input the text you want to find and then select the data type. Tap on **Search** to start the search.
2. To find information that occupies a larger space, select **Larger than 64 KB** for **Type**.



Actually, you can use **File Explorer** to search for files and place these files into folders systematically. Just tap  > **Programs** > **File Explorer**.

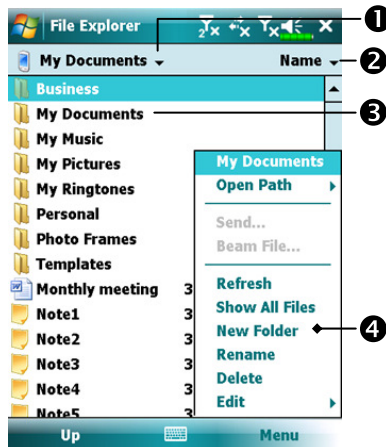

- 1 Tap to change folders.
- 2 Select the sort order for the list.
- 3 Tap the folder name to open folder.
- 4 Tap **Menu** and then **New Folder** to create a new folder.


Note

You can move files in **File Explorer** by tapping and holding the item you want to move, and then tapping **Cut** or **Copy** and **Paste** on the pop-up menu.

Navigation Bar and Command Bar


The navigation bar is located at the top of the screen. It displays the active program and current time, and allows you to switch to programs and close screens.

Use the command bar at the bottom of the screen to perform tasks in programs. The command bar includes menu names, buttons, and the Input Panel button. To create a new item in the current program, tap **New**. To see the name of a button, tap and hold the stylus on the button. Drag the stylus off the button so that the command is not carried out.

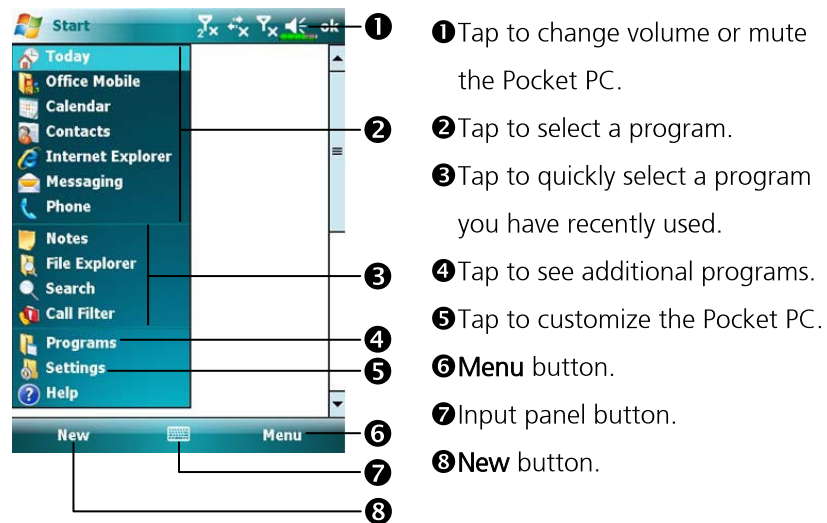

Pop-up menus


With pop-up menus, you can quickly choose an action for an item. For example, you can use the pop-up menu in the contact list to quickly delete a contact, make a copy of a contact, or send an e-mail message to a contact. The actions in the pop-up menu vary from program to program. To access a pop-up menu, tap and hold the stylus on the item name that you want to perform the action on. When the menu appears, lift the stylus, and tap the action you want to perform. Or tap anywhere outside the menu to close the menu without performing an action.

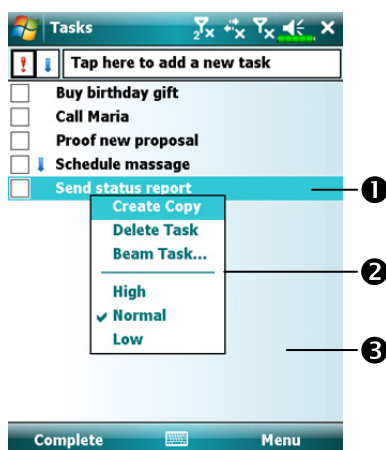


- ❶ Tap and hold to display the pop-up menu.
- ❷ Lift the stylus and tap the action you want.
- ❸ Tap outside the menu to close it without performing an action.

Redefine Hot Keys

Tap  > **Settings** > **Personal** tab > **Buttons**.

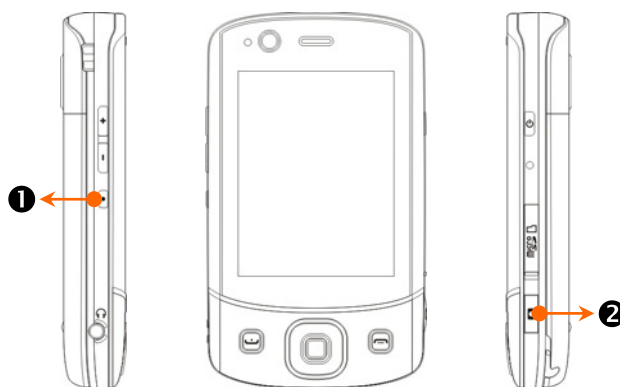

① Button 1 ② Button 2

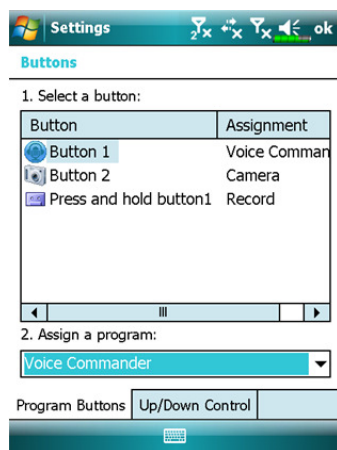

These hot keys can be redefined as launch keys for frequently used programs.

 and  are exclusive phone functions so they cannot be redefined.

6 Synchronization


Windows Vista Part

A PC with Windows Vista™ operating system can be used to enable connection and synchronize with your Pocket PC. The Windows Mobile® Device Center application can be used to manage your Pocket PC, and can provide Pocket PC access to other resources through the connected PC. The online services and application access can also keep the Pocket PC up-to-date with the connected PC. For example, if you make a modification to the Pocket PC, then this modification will be automatically applied to the appropriate information on the computer during the next synchronization, and vice versa. This way, the latest data can be ensured to be available no matter which computer is being accessed.

Important Installation Notice

Before you install Windows Mobile® Device Center, make sure that the USB cable on the Pocket PC is not connected to the personal computer. Connect the USB cable only after Windows Mobile® Device Center is installed.

1. Software installation: You could use the Getting Started CD to install Windows Mobile® Device Center on the personal computer.
2. Hardware installation: The USB cable is a plug-and-play device. Use the USB cable to connect your Pocket PC to your personal computer.

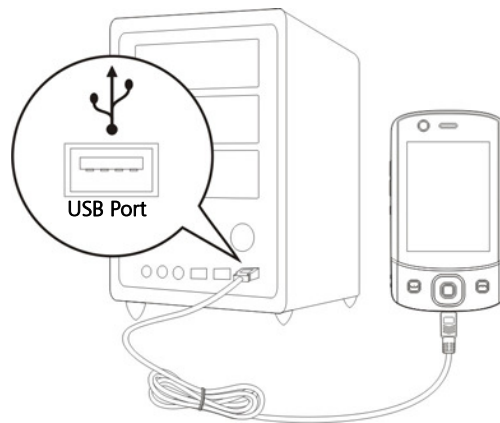

3. Using Windows Mobile® Device Center

- ❶ After installation is complete, the Setup Wizard helps you customize your synchronization settings.
- ❷ Once you use the USB cable to connect the two devices properly, the Set Up a Partnership screen appears on the personal computer. Set it up according to your requirements. The green icon  appears on the status bar of your personal computer to indicate that it is Connected.

Windows XP/2000/98 Part

A PC with Windows XP/2000/98 operating system can be used to enable connection and synchronize with your Pocket PC. Using Microsoft® ActiveSync®, you can *synchronize* the information on your desktop computer with the information on your device. Synchronization compares the data on your device with your desktop computer and updates both computers with the most recent information. For example:

- Keep Pocket Outlook data up-to-date by synchronizing your Pocket PC with Microsoft Outlook data on your desktop computer.
- Synchronize Microsoft Word and Microsoft Excel files between your Pocket PC and desktop computer. Your files are automatically converted to the correct format.

Note

By default, ActiveSync does not automatically synchronize all types of information. Use ActiveSync options to turn synchronization on and off for specific information type.

With ActiveSync, you can also:


- Back up and restore your Pocket PC data.
- Copy (rather than synchronize) files between your device and desktop computer.
- Control when synchronization occurs by selecting a synchronization mode. For example, you can synchronize continually while connected to your desktop computer or only when you choose the synchronize command.
- Select which information types are synchronized and control how much data is synchronized. For example, you can choose how many weeks of past appointments you want synchronized.

Installing and Using ActiveSync

Important Installation Notice


Before you install ActiveSync, make sure that the USB cable on the Pocket PC is not connected to the personal computer. Connect the USB cable only after ActiveSync is installed.

1. Installing ActiveSync: You could use the Getting Started CD to install Microsoft ActiveSync version 4.5 or above on the personal computer. ActiveSync is already installed on your Pocket PC.
2. Hardware installation: The USB cable is a plug-and-play device. Use the USB cable to connect your Pocket PC to your personal computer.

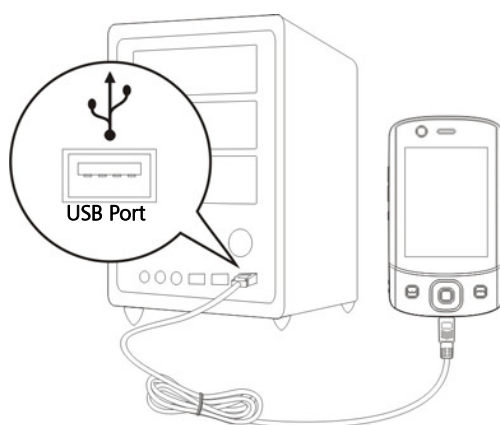


3. Using ActiveSync

- ❶ After installation is complete, the ActiveSync Setup Wizard helps you customize your synchronization settings.
- ❷ Once you use the USB cable to connect the two devices properly, the Set Up a Partnership screen appears on the personal computer. Set it up according to your requirements. The green icon  appears on the status bar of your personal computer to indicate that it is Connected.
- ❸ Click **Explore** on the Microsoft ActiveSync on the personal computer to access files in the Pocket PC. Just like using a personal computer, manage the files in the two devices.

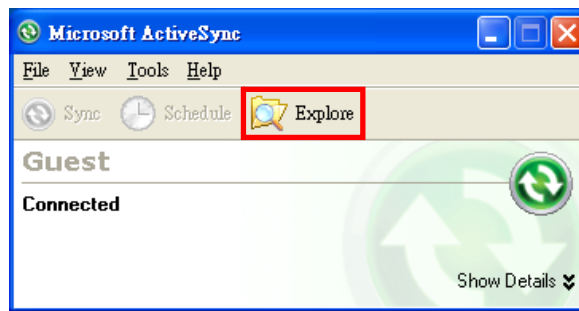

FAQ About Synchronization

Tap  > **Settings** > **Connections** tab > **USB to PC**.

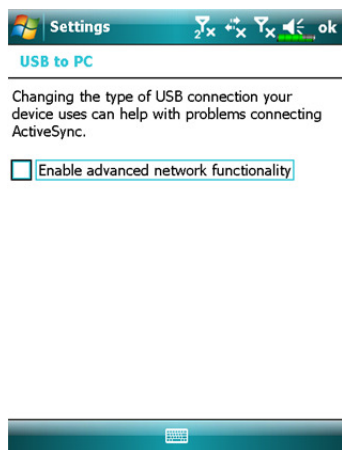


1. Factory setting defaults to checking the box.
2. If you have followed the above installation and operation procedures and find that the connection between your Pocket PC and desktop PC still cannot be established, please uncheck the box shown on the left.

USB Synchronization


Before you start to synchronize, use the Pocket PC Getting Started CD to install synchronization tools on your personal computer. For more information on how to install, please refer to the Pocket PC Getting Started CD or online help. Synchronization tool is already installed on your Pocket PC.

ActiveSync synchronization settings:


1. After installation is complete, the Setup Wizard will continue to guide you.
Adjust the specifications according to your actual needs.
2. Use the USB cable to connect the two devices properly and the Set Up a Partnership screen appears on the personal computer. Set it up according to your requirements.



① Click OK.

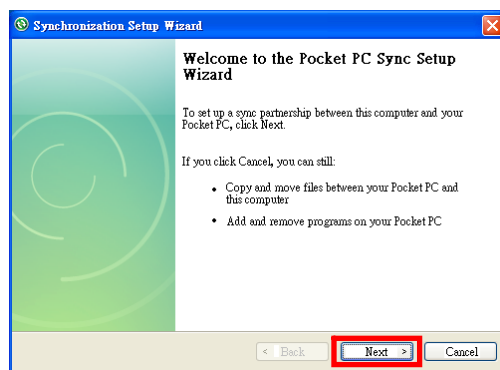


② Click Next.

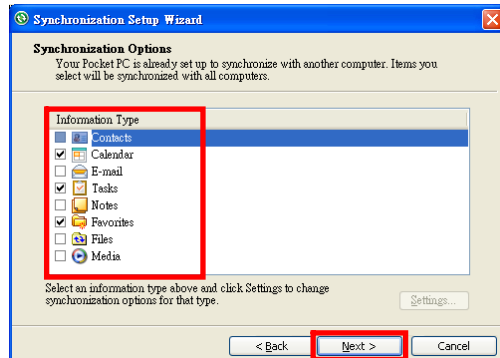


3 Check the items you want to synchronize.

4 Click Next.

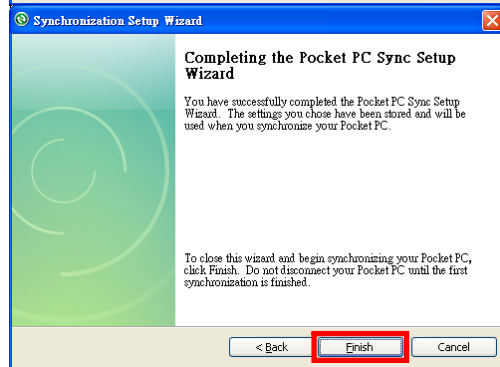

5 Click Finish.

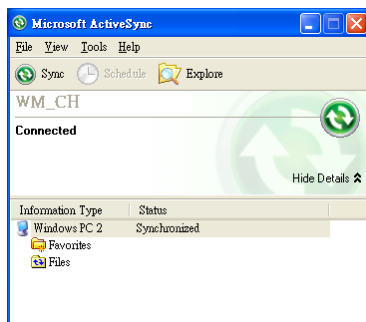

- ⑥ After installation is complete, the ActiveSync Setup Wizard helps you connect your Pocket PC to your desktop computer, set up a partnership so you can synchronize information between your Pocket PC and your desktop computer, and customize your synchronization settings. Your first synchronization process will automatically begin when you finish using the wizard.
- ⑦ The green icon  appears on the status bar of the personal computer to indicate that it is Connected.


After your first synchronization, take a look at **Calendar**, **Contacts**, and **Tasks** on your Pocket PC. You'll notice that information you've stored in Microsoft Outlook on your desktop computer has been copied to your device, and you didn't have to type a word. Disconnect your Pocket PC from your computer and you're ready to go!

Synchronization Tool on Pocket PC

Once you have set up **ActiveSync** and completed the first synchronization process, you can initiate synchronization from your Pocket PC. To switch to **ActiveSync** on your Pocket PC, tap  > **Programs** > **ActiveSync**.

For more information on how to use **ActiveSync** on your personal computer, run **ActiveSync** and refer to the **ActiveSync** online help. To learn more about the Pocket PC **ActiveSync**, switch to **ActiveSync** and tap  > **Help**. Just refer to the **Help** for more information.

After the synchronization is completed, tap **Calendar**, **Contacts**, and **Tasks** on the Pocket PC to view if the information saved in Microsoft Outlook on the personal computer is already copied to the Pocket PC.

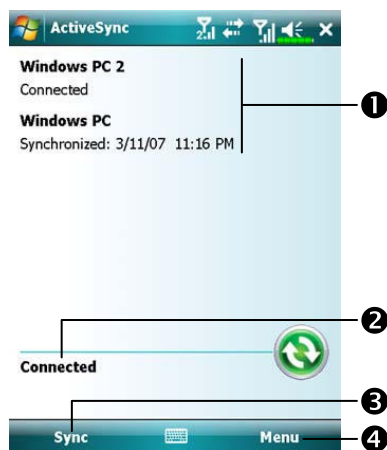

On the Pocket PC site: Tap  > **Programs** > **ActiveSync**

- ① View synchronization status.
- ② View connection status.
- ③ Tap to connect and synchronize.
- ④ Tap to synchronize via Bluetooth or change synchronization settings.

Synchronizing using Bluetooth

Without using the USB cable to connect the two devices, you can still synchronize using Bluetooth. The greatest advantage is that you don't have to plug in and detach from the USB cable so often. This is especially useful for managing several Pocket PCs. For details on Bluetooth devices, refer to "Using Bluetooth" section.

6-12

7 Connections

Connecting to the Internet

This section teaches you how to use GPRS wireless network connection. GPRS wireless networking is a convenient function for working at home or while traveling. You can use the Pocket PC to browse websites and read or send E-mails, SMS or MSN messages.

To start using GPRS service, please:

1. Contact your service provider for the data plan and apply for it.
2. Install the SIM card with the GPRS plan in **SIM1** slot
3. Activate **Phone1**.

Note


SIM2 slot allows only the voice services such as phone call and SMS provided by the SIM card you install in it; for use of data transmission service such as GPRS, 3G or EDGE, please insert the compatible SIM card in **SIM1** slot.

Connection Wizard

Generally, you will only need to install the SIM card to your Pocket PC to simultaneously use the mobile phone functions. The system will automatically add the connection items for this SIM card. To verify: Tap  > **Settings** > **Connections** tab > **Connections** > “**Manage existing connections**,” the list will show the newly added network name.

If the system is unable to successfully add the connection to your SIM card, it is possible to use **Connection Wizard**.

Tap  > **Settings** > **Connections** tab > **Connection Wizard**.

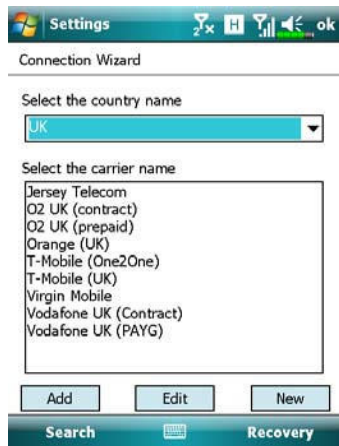

1. Select the country name from the list.
2. Select the carrier name from the list.
3. According to actual requirements, select the carrier name, and then tap **Add** button or **Edit** button. Or use the **New** button to add the new network connection.
4. **Search** button: Detect the currently available telecommunication service. If it is found, use the **Add** button to add the highlighted selection. If it is not found, the “**New network**” screen will be shown; please manually setup the network.
5. **Recovery** button: Restore to the original setup value.
6. Tap  > **Settings** > **Connections** tab > **Connections**, and then “**Manage existing connections**,” the list will show the newly added network name.


Setting the GPRS Connection

To connect to the Internet or use MMS service, please make sure you have installed SIM card in **SIM1** slot and activated **Phone1**.

Tap  > **Settings** > **Connections** tab > **Connections** > **Tasks** tab.




1. As shown in the screen on the left tap “**Add a new modem connection.**”



2. Enter the “**Make New Connection**” screen as shown in the screen on the left.
 - ① Input a new connection name for convenience in making connections in the future.
 - ② Select “**Cellular Line (GPRS).**”
 - ③ Lastly tap **Next.**







3. Input the Access Point Name provided by your service provider and tap **Next**.

4. Input your personal information such as account number, and tap **Finish**.



Starting GPRS Connection

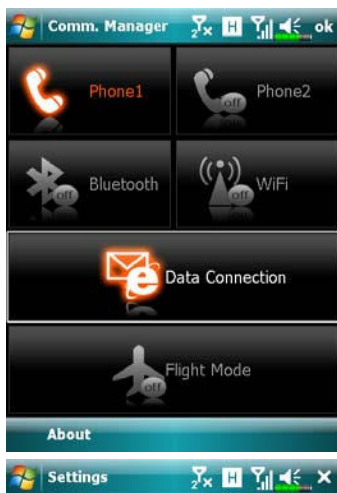


1. Turn on Phone: Tap or icon at the top of the screen and tap “Comm. Manager.” Tap and input your PIN to enable GSM. The icon will change to while the icon changes to .

2. Tap in the **Communication Manager**. When it becomes , the GPRS (Data) connection is available.


3. Tap , then tap **Settings** to link to **Connections**. You are ready to connect GPRS.

represent the availability of various data connection services provided by SIM card you installed in **SIM1** slot. They are shown according to your monthly plans, telecom service provider, and network distribution conditions or effective system coverage area. To make modifications to your monthly plans, please contact your telecom service provider.

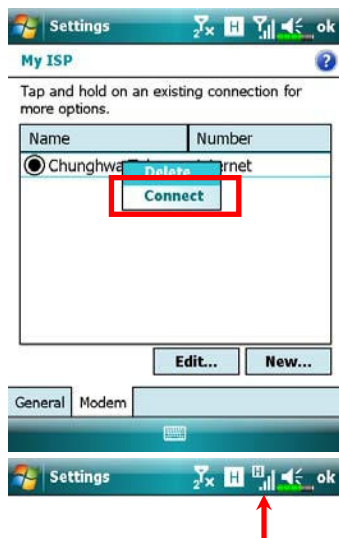

4. Connect GPRS: Select “**Manage existing connections**” in **Connections**. Tap and hold on the newly created connection name, and then select **Connect** to enable GPRS connection.
5. Input your account information in the Logon Network screen and tap to login to the network.
6. After the connection is established, the  icon will change to .
7. Now you can use the appropriate program to access the Internet, receive or send E-mails, etc.

Disconnecting GPRS




1. Disconnect GPRS: Tap  and the message window appears. Tap **Disconnect**.



2. Turn off Phone: Tap  and then "Comm. Manager." Tap  to disable GSM.

Using Bluetooth

Bluetooth is a short-distance wireless communication technology with an effective range under 10 meters (30 feet). When the Bluetooth power is turned on, the indicator will blink blue.

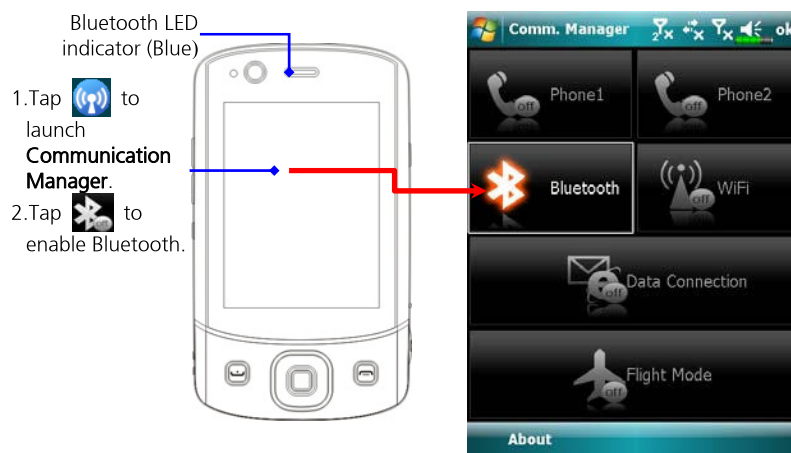

Bluetooth capable devices such as the PC, Pocket PC, Bluetooth headset etc. can be connected to this product for the convenience of data sharing.

Setup the Bluetooth Connection


On the **Communication Manager** screen, tap and hold the  button, then release to enter the **Bluetooth** manager.

Tap  > **Settings** > **Connections** tab > **Bluetooth**



Tap **Bluetooth** and then **Devices** tab.

1. Select “Add new device” and the system will begin to search for nearby Bluetooth devices.

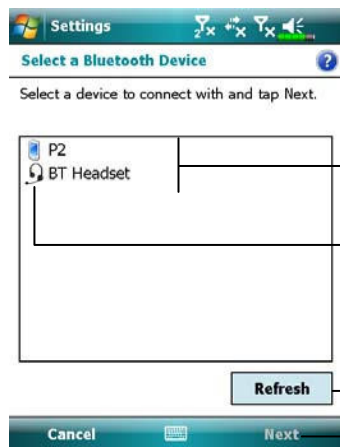


2. The search results will be similar to the screen to the left. Select the device to connect with the list.

- 1 All Bluetooth devices found nearby the system.
- 2 This icon indicates a Bluetooth headset.
- 3 **Refresh** button: Search again to look for additional Bluetooth devices to connect with.
- 4 Select any device to connect with, and then tap **Next** to follow the onscreen instructions.

Note

Pair for Bluetooth headset: When the system asks for the password, please refer to the instructions provided with your purchased Bluetooth headset.

Pair for PC or Pocket PC: When the system asks for the password, please make sure that the identical password is entered to both devices.

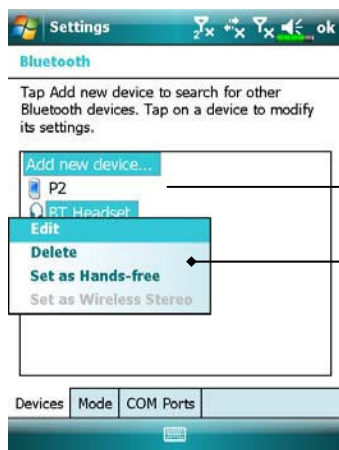

3. Your Pocket PC connected with these devices will be able to transfer data, receive calls on a Bluetooth headset, and other applications.

① Successfully connected devices will be shown as on the screen to the left.

② Tap and hold a device, for example the Bluetooth headset, then select **Set Hands-free** to be able to use the Bluetooth headset to receive calls.



4. The screen to the left is during a call.

❶ **Phone** screen during a call will show a headset icon in the upper right corner, the Bluetooth headset will be used to communicate with the callee.



Tap **Bluetooth > Mode** tab.

5. Configure the Bluetooth related options for your Pocket PC.


6. Tap  > **Settings > Personal** tab > **Owner Information**.

Enter the name that you wish to show in the Name field. At the same time, other Bluetooth capable devices can recognize your Pocket PC by this name.



❶ Checkmarking the “**Make this device visible to other devices**” option will enable all Bluetooth capable devices within the 10 m (30ft) effective range to detect your Pocket PC, and transmit data with the proper authentication.

❷ If the “**Make this device visible to other devices**” option is not selected, your Pocket PC can send data to other devices but other devices will not be able to detect your Pocket PC.

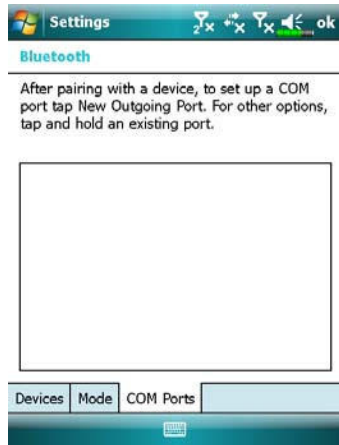

Tap **Bluetooth** and then **COM Ports** tab.

7. Follow the onscreen instructions to register the connected Bluetooth device as an effective COM port.

Internet Sharing

Tap  > **Programs** > **Internet Sharing**.

This function provides a simulated modem function for the Pocket PC to connect to the PC. The built-in Bluetooth pairing or USB port can be connected with the PC and provide Internet access on the PC.




1. The USB connection is used as an example.
2. Complete the connection setup between the Pocket PC and PC. The network connection and configuration can be attained from your telecom service provider.
3. Tap **Connect** and wait for the system to complete the connection.
4. This screen is only for reference as the actual connection method will depend on the Bluetooth pairing or USB port; the connection configurations can be referenced from your telecom service provider. The fees will be decided by the service provider.

CSD Type

Tap  > **Settings** > **Connections** tab > **CSD Type**.

You must first apply for Circuit-Switched Data (CSD) service from your telecom company before you can use this function. In short, this function is similar to the modem dial-up in a personal computer. By simulating the Pocket PC as a modem and connecting through the built-in GSM device, you can use the Pocket PC to access the web.

To start using this function, please install the CSD service-enabled SIM card in **SIM1** slot and activate **Phone1**.

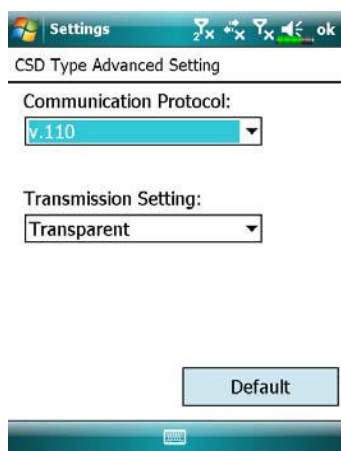

⌚ This figure is for reference only.


The parameters shown in the screen will be based on the settings provided by your telecom company. The charge rate is regulated by your telecom company.

Connecting with a Personal Computer

For more information, refer to “Synchronization” section.

Wireless LAN Transmission

On the Today screen, tap  to launch **Communication Manager**. For more information, refer to “Using Wireless LAN” section.

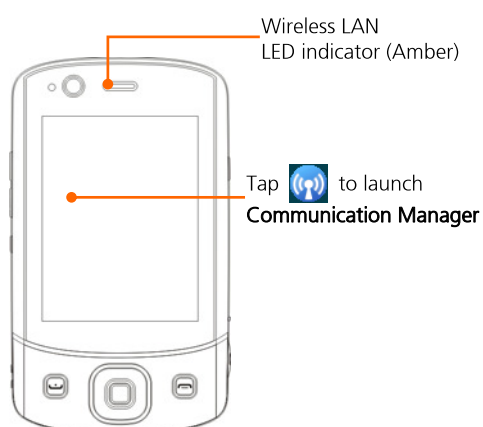

8 Using Wireless LAN

This section teaches you how to use the Pocket PC's built-in wireless LAN function to connect to the Internet. It is convenient for you to browse websites and send/receive E-mails through wireless networks at certain locations where wireless networking services are provided.


When you purchase credits for connecting to the Internet through a wireless LAN, you will be given the following information: an IP address, DNS name server address, Proxy server, port, and network key, etc. You need this information to setup and activate your connection. In some cases, you may need additional information to use a company's wireless connection, please confirm with the network administrator in your company.

If this is your first time using the wireless LAN function, firstly you should refer to the following "Configure Your Wireless Network" section for instructions for the necessary configuration settings. After you have completed the one-time configuration process, you only need to select the  icon in the **Communication Manager** main menu for subsequent connections.

Connecting to Wireless LAN

On the Today screen, tap  to launch **Comm. Manager**.

Tap  > **Programs** > **Comm. Manager**.

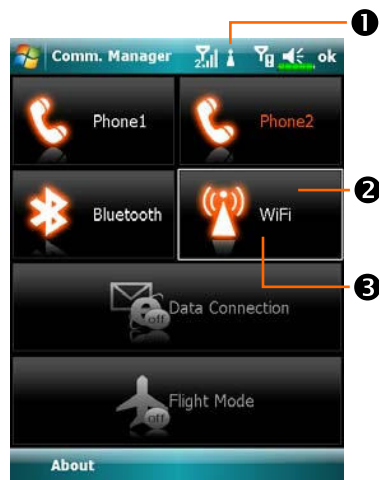


❶ This icon will show up on your screen whenever your Pocket PC has detected a usable wireless network and has connected to that network, indicating that your Pocket PC has successfully connected to the network hotspot (Access Point). The LED indicator on the Pocket PC will blink amber.

❷ Tap to connect or disconnect to your wireless network, a  means that this function has been disabled.

❸ Tap and hold this button, then release to enter the configuration screen.

⌚ When the screen shown on the left appears, please choose a wireless network that you can use, and then tap **OK** button. Then, select **Work**, and tap **Connect** button.

The first time you use the wireless LAN function, your system will ask you to set the above mentioned settings, after that, your system will continually use the settings from your most recent successful connection.




Configure Your Wireless Network

WLAN Setup Scenarios

Location	Select Networks	Proxy Connection	Network key or Access Point
Home	 > Settings > Connections tab > Connections > Advanced tab, Select Networks button, and then select My Work Network from "Programs that automatically connect to the Internet should connect using:" menu	1. Close Proxy connection 2. Not required to set Proxy	1. Authentication: Select Open 2. Data Encryption: Select WEP to enable the entry bar regarding Network key
Office	Refer to the above and set as My Work Network	 > Settings > Connections tab > Connections > Tasks tab, select "Edit my proxy server," and then check the Internet items to enable the entry bar about Proxy	Refer to the above and set the items for Network key
Café or restaurant	Refer to the above and set as My Work Network	1. Close Proxy connection 2. Not required to set Proxy	WLAN select different Access Point


Configure Your Wireless Network (Normal Setup)


You will need a correct IP address; DNS name server address, Proxy server, and connection port number to setup your connection. If you have purchased a wireless Internet service account, then the service desk at the location where you will be connecting will provide you with this information, or, you should obtain this information from the network administrator of your company.

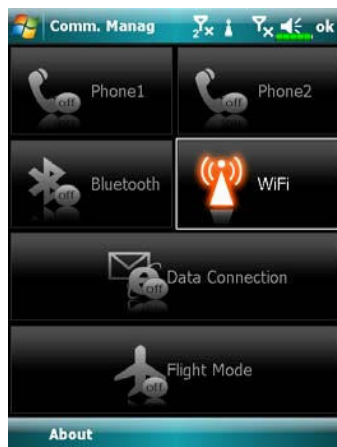

When your Pocket PC is unable to automatically detect or connect to a usable wireless network, please try to configure the network manually. Please refer to this section's settings instructions.

1. Select the  icon in the **Communication Manager** main menu, a  icon will display on the navigation bar.
2. Then tap  > **Settings** > **Connections** tab > **Connections** > **Advanced** tab, the screen displays shown on the left.
3. Select the **Select Networks** button.

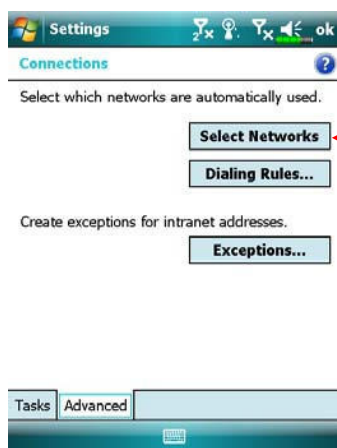



4. As shown on the left, make sure that **My Work Network** is selected for both items, and finally tap **ok** to save and exit.

■ **My Work Network** is the WLAN connection method. As this option is from a choice of two, the next time you need to use the GPRS connection, you will have to refer to the above listed steps, select **My ISP** for the first item.

5. At the **Communication Manager** screen, tap and hold, and then release the  button to enter the setup screen.

6. Select name of a currently available network to enter the WLAN authorization setup screen.



7. Set accordingly to the rules and information provided by the hotspot location.

- ❶ **Authentication:** Select Open
- ❷ **Data Encryption:** Select WEP to enable the entry bar about Network key
- ❸ **Network key**
- ❹ **Key index**

8. Tap and hold on the name of the network connection that you can currently use, then select **Connect**. When the  icon appears on the top of the screen, your wireless network has been successfully connected.

Configure Your Wireless Network (Proxy Setup)

To successfully configure your network, you will need the following information: a correct IP address, DNS name server address, Proxy server, and connection port number, etc. Please obtain the above listed information from your company's network administrator. If your company's networking environment doesn't need Proxy server settings, please close the proxy connection.

Tap  > **Settings** > **Connections** tab > **Connections** > **Tasks** tab.



When your Pocket PC fails to automatically detect or connect to a usable wireless network, please try using the manual method to configure your network settings. Please refer to the settings information in this section.




1. Select "Setup my proxy server" or "Edit my proxy server," as shown on the left.
2. In the **Proxy Settings** tab screen, make sure that the following items have been checked:
 - ① This network connects to the Internet
 - ② This network uses a proxy server to connect to the Internet

☒ The above is applicable to an office environment that requires a Proxy setup.

For others that close the proxy connection, please do not check the box named **"This network connects to the Internet"** and skip the following procedures.

3. Enter the name into the **"Proxy server"** field.

4. Select the **Advanced** button and enter the advanced settings screen.

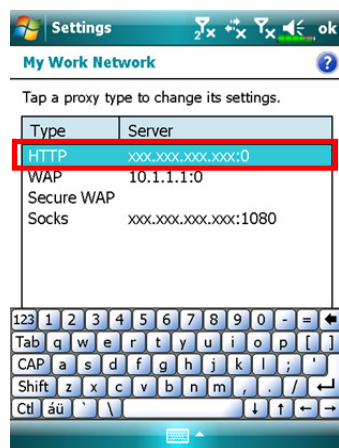

5. You can modify the settings by tapping the HTTP type.



6. Enter the number into the **"Port"** field. Finally, tap **ok** to save and exit.


9 E-mails and Messages

Message Accounts

Messaging is where you can manage all message types including SMS (Short Messaging Service), MMS (Multimedia Messaging Service) and E-mail accounts. To use these services, please connect your device to a network connection.

Tap  > **Messaging**.

On account picker screen, select the messaging service you want to use.



- ① Tap to enter **Messages**
- ② Tap to enter an E-mail accounts
ou have established.
- ③ Tap to setup a new E-mail
account
- ④ Change the account settings. Or
delete a message.



Note


- To use **MMS** and **E-mail**, please:
 1. Apply wireless service from your service provider
 2. Activate this SIM in **SIM1** slot
 3. Go to  > **Settings** > **Connections** tab > **Connections** to set up the network settings.
 4. On the Today screen, tap  and turn on **Data Connection** by tapping .
- **SIM2** slot allows only the SMS service provided by the SIM card you install in it; if you want to send MMS message or E-mail via a certain number, please insert the SIM of that number in **SIM1** slot.

Text Messages


Reading Received Text Messages

Tap  > **Messaging**, On **Messaging** screen, tap **Messages**.

- To read received messages, tap ▼, and select the sub folder **Inbox** under **Messages**.

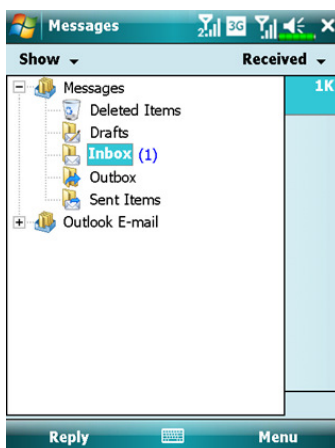


- In **Inbox**, you can tap and hold a message to open a list of actions; you may **Delete**, **Reply** to or **Forward** this message. To sort the messages by sender or received time, tap **Menu > Tools > Sort By** and then choose the sort method.

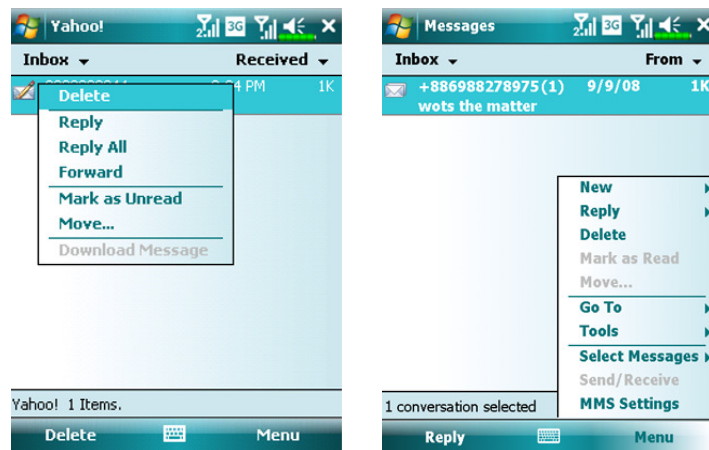

Creating a Text Message

1. On **Messaging** screen, tap **Messages > Menu > New > Text Message**

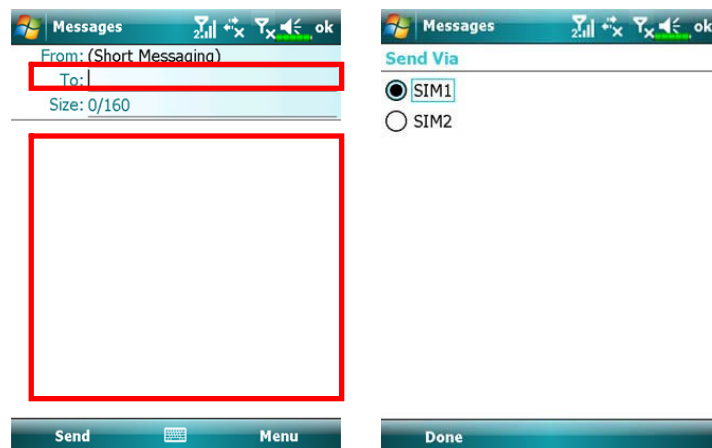

2. In **To:** field, enter the number of recipient or tap **Menu > Add Recipients** to select a contact. If there is more than one contact, use a semi-colon (;) to separate them.
3. In **Text** field, enter your message. You can tap **Menu > My Text** to use canned messages.
4. Tap **Send**.
5. Select the SIM number you will use to send this message.

Note

If the SIM card you select is not activated, a notice “**Send failed**” will pop up.




Multimedia Messages

Reading MMS Messages

Tap  > **Messaging** > **Messages**.

In **Inbox**, tap on a single MMS message to view it.

- Use the playback controls: **Play**, **Pause** or **Resume** to view the message.

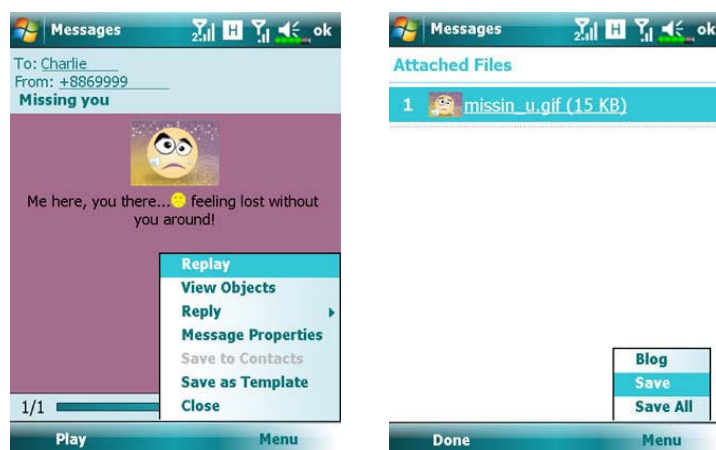

- To save the objects attached to this MMS message:

1. Tap **Menu** > **View Objects**,

2. On object list, tap **Menu** > **Save** or **Save All**,


Note

- If you reply to an MMS message from **Inbox**, this reply message will be sent as an MMS message via **SIM1** number.
- If you want to send MMS message or E-mail via a certain number, please always activate the SIM of that number in **SIM1** slot.
- To modify MMS settings such as **Receiving Options** or **Sending Options**, in **Inbox**, tap **Menu** > **MMS Settings**. In these settings you may select to request / send a delivery report, set the size or delivery time of a message.

Creating an MMS Message

On **Messaging** screen, tap **Messages > Menu > New > Multimedia Message**

Select an MMS template to compose a new MMS message. Or tap the envelop icon to open your own blank message.

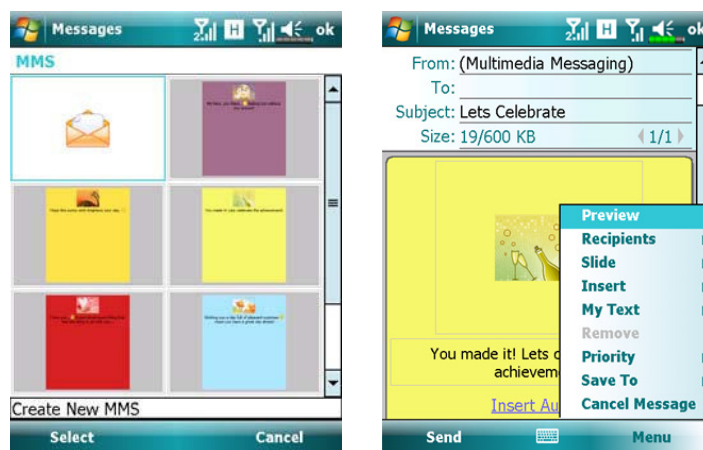

On an MMS composing screen, you may tap:

- **Bcc / Cc / To** field to add recipients.
- **Subject** field to enter the message title.
- **Menu > Insert** to insert a file.
- **Menu > Slides** to edit the slide content and settings.
- **Menu > Preview** to preview your MMS message.
- **Send** to send out this MMS message.

Note

- You may also send an MMS message from **Camera, Album, Pictures & Videos, File Explorer** and **Notes**.
- **SIM2** slot allows only the SMS service provided by the SIM card you install in it; if you want to send an MMS message or E-mail via a certain number, please activate the SIM of that number in **SIM1** slot.

E-mails

This section explains the basic preparations and processing principles. If you have any questions, refer to online help about Pocket PC or synchronization.

Use **Messaging** to send and receive E-mails messages in either of these ways:

1. Send and receive e-mail messages by connecting directly to an e-mail server through an Internet service provider (ISP) or a network.
2. Synchronize e-mail messages with Microsoft Exchange or Microsoft Outlook on your desktop computer.

Note

Inbox synchronization does not support synchronization with Microsoft Outlook Express.

Synchronizing E-mail Messages

If you want to synchronize e-mails with company or home usage, please refer to this section. E-mail messages can be synchronized as part of the general synchronization process. You will need to enable Inbox synchronization in synchronization tools. For information on enabling Inbox synchronization, see Help on the desktop computer.

During synchronization:

1. Refer to "Connecting to the Internet" section. Select the partnership you want to establish under "**Set up a Partnership**" and you can start to synchronize data. If you choose not to synchronize data, you can manually copy or move E-mails between the Pocket PC and a personal computer.
2. E-mail messages in the "**Outbox**" folder on your Pocket PC are transferred to Exchange or Outlook, and then sent from those programs.
3. Exchange or Outlook E-mail is supported.
4. Mails in the Pocket PC Inbox folder will be transmitted to the personal computer and then sent out via Microsoft Outlook or Microsoft Exchange.
5. If you delete mail in the Pocket PC, this mail will also be deleted from the personal computer the next time the two devices perform synchronization.
6. SMS messages are not synchronized.

Connecting Directly to the Mail Server

For single-machine use, not combining office and home E-mails, please refer to "E-mail Server Setup" section.

You will receive messages directly from the mail server. This is irrelevant to personal computer use. You can work online or offline. When working online, you read and respond to messages while connected to the e-mail server. Messages are sent as soon as you tap **Send**, which saves space on your Pocket PC.

When working offline, once you've downloaded new message headers or partial messages, you can disconnect from the e-mail server and then decide which messages to download completely. The next time you connect, Inbox downloads the complete messages you've marked for retrieval and sends the messages you've composed.


Based on your preference, you can program the Pocket PC to receive mail for the last few days, receive subjects only or the entire mail, or just receive mail with file attachments smaller than a specified size. If you want to receive more or less mail, tap **Menu** and then **Options** to adjust the E-mail account settings according to your needs.

E-mail Server Setup

Refer to this section if you are preparing for single-machine use and not combining office and home E-mails. If you already have an E-mail account from your ISP or company network, you can use **Messaging** to send and receive mails and messages. To establish a new **Messaging** E-mail server on your Pocket PC, refer to the following sections.

1. Obtain the following information from your ISP or company's network administrator for convenience in setting up the E-mail service.

- ❶ E-mail address, account name and password
- ❷ POP3 or IMAP4 server name for internal mail
- ❸ SMTP server name for sending mail



2. Setup a new E-mail account:

Tap  > **Messaging** > **Setup E-mail**.



3. Follow the instructions on the screens to setup the E-mail account.

4. Refer to “Connecting to the Internet” section or “Using Wireless LAN” section to connect the Pocket PC to the Internet and you can start sending and receiving E-mails and SMS messages.

5. Connecting to the E-mail server:

❶ Tap **Menu** > **Go To**, and then check the new E-mails account you setup.

❷ Tap **Menu** and then **Send/Receive**.


Note

Tap **Menu** > **Tools** > **Options** to change the E-mail account.

Sending / Receiving E-mails

Sending E-mails

Tap **Menu** and then **New** to compose a message and then tap **Send** to send it.

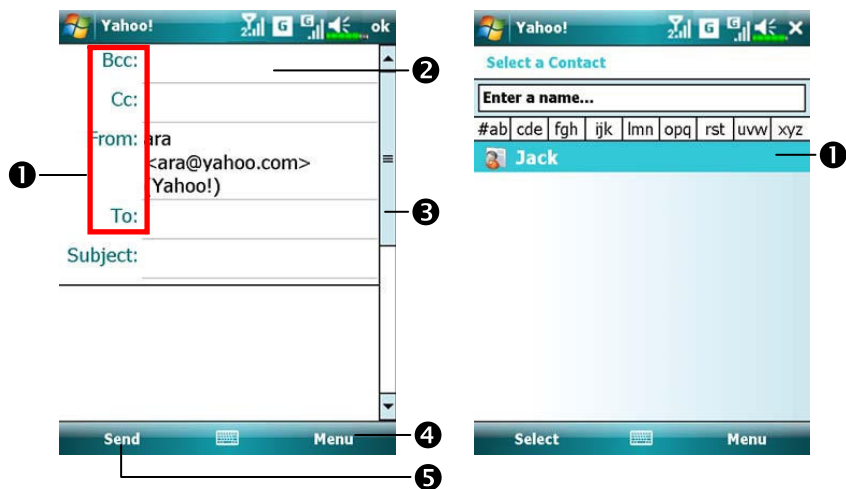

- ❶ Tap **To**, **Cc** or **Bcc** to open the **Contacts** screen. As long as you have set up **Contacts** beforehand, you can just tap to select.
- ❷ Tap the data area to input the E-mail address, mobile phone number and subject directly. If there is more than one contact, use a semi-colon (;) to separate the addressees.
- ❸ Use the scroll bar to view the header.
- ❹ **Menu** button: Provides frequently-used functions for writing mail such as request return receipt, attach files to E-mail, select canned messages, edit canned messages or cancel mail.
- ❺ **Send** button: Send your messages.

Reading and replying E-mails

Receive new mails by tapping **Menu** and then **Send/Receive**. Switch to the **Inbox** folder and tap to open.

Changing preference settings

- ❶ Set the Inbox Synchronization option in synchronization tools.
- ❷ Tap  > **Messaging** > **Menu** > **Options**, and then the **Accounts**, **Message** tabs on the Pocket PC to set the appropriate options.

Direct Push Technology Alert


The Direct Push Technology alert function will enable you as a corporate user to never miss another e-mail, using the Pocket PC for the best business service.

Through the synchronization feature, your Pocket PC can instantly and automatically receive important e-mails from Microsoft Exchange Server.

Direct Push Technology Alert Settings

The following description will explain how to setup the synchronization program on the Pocket PC end, and to directly synchronize the Pocket PC with Exchange Server. This way, your device under GPRS or wireless network connections will be able to receive in-coming e-mail alerts, and be able to instantly read the messages.

A reminder that if you selected the connection method to be wireless network, for power saving purposes when the Pocket PC enters sleep mode the connection will be broken. During this time you will not be able to receive instant e-mail. However, you will only need to press the **POWER** button to automatically complete the connection to the wireless network.

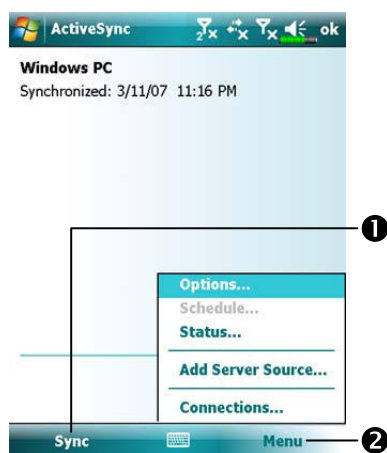

1. Tap  > **Programs** > **ActiveSync** > **Menu** > **Configure Server**.


☒ If the Exchange Server synchronization has not been setup before, please select **Add Server Source**.

① Tap to connect and synchronize.

② Tap to modify the synchronization settings.



2. Obtain the e-mail, server address, user name, network etc. from the company network administrator to successfully setup the server data.

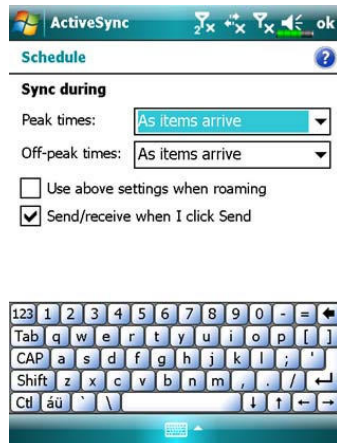

3. Tap Menu and then **Schedule**.

The Peak times and Off-peak times provide a **As items arrive** option, this is the direct push technology alert function.

Windows Live™ Messenger

To switch to Windows Live™ Messenger,  > **Programs** > **Messenger**.

Windows Live™ Messenger on your Pocket PC is an instant messaging program that lets you:

- See who is online.
- Send and receive instant messages.
- Have instant message conversations with groups of contacts.

For more information on using Windows Live™ Messenger, tap  > **Help**.

To use Windows Live™ Messenger, you must have a Microsoft Passport™ account or a Microsoft Exchange e-mail account. You must have a Passport to use Windows Live™ Messenger Service. If you have a Hotmail® or MSN account, you already have a Passport. Once you have obtained either a Microsoft Passport or a Microsoft Exchange account, you are ready to set up your account.

Note

Sign up for a Microsoft Passport account at <http://www.passport.com>. Get a free Microsoft Hotmail e-mail address at <http://www.hotmail.com>.

Setting Up

The first time you use: Tap  > Program > Messenger.

On the Today screen, tap **Messenger** to display the **Windows Live™ Messenger** sign-in screen.


Before you can connect, you must enter Passport or Exchange account information.



1. Choose **Messenger** from  > Program




2. Tap Sign in.

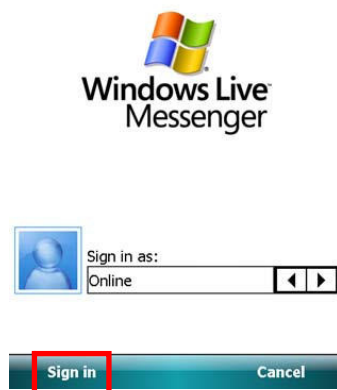

Working with Contacts

If you already use Windows Live™ Messenger on your desktop computer, your contacts will show up on your Pocket PC without being added again.

The Windows Live™ Messenger window shows all of your messenger contacts at a glance, divided into Online and Offline categories, or sorted by groups. From this view, while connected, you can chat, send an e-mail, block the contact from chatting with you, or delete contacts from your list using the pop-up menu.



❶ Tap a contact to start a chat.

❷ Provides the relevant menu.

For example, select **Add new contact** to create a new MSN contact. Or select **Sign out** to quit from Windows Live™ Messenger.




Notes

To see others online without being seen, tap **Menu, Change status**, and then select **Appear Offline**.

If you block a contact, you will appear offline but will remain on the blocked contact's list. To unblock a contact, tap **Menu, Contact options**, and then **Unblock contact**.

Chatting with Contacts

Tap a contact name to open a chat window.

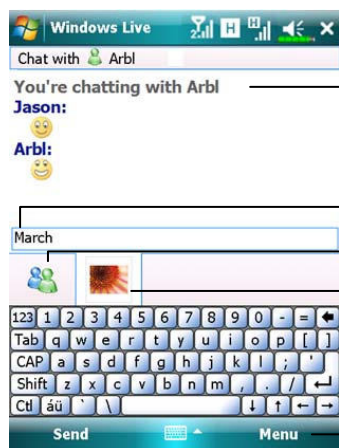

❶ View full chat.

❷ Enter your message in the text entry area, and tap **Send**.

❸ Return to the contacts list, and select a contact to chat with.

❹ The contact you are chatting with.

❺ Provides the relevant menu.


For example, to invite another contact to a multi-user chat, select **Options** and then **Add participant**, and tap the contact you want to invite.

10 Multimedia


Using Camera

Pocket PC Exterior and Camera

Front and Sides

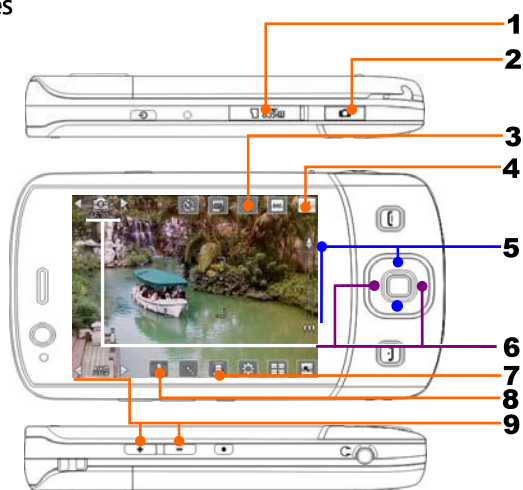

Rear

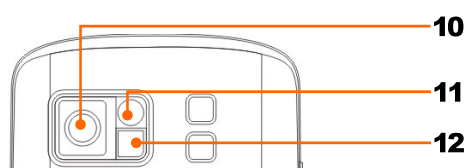

- | | |
|---|--|
| 1. MicroSD card slot | 2. Camera hotkey, camera shutter, camcorder button |
| 3. Activate or disable the flash or spotlight | 4. Quit Camera |
| 5. Digital zoom | 6. Switch to other camera or camcorder modes |
| 7. Select the storage location | 8. Select front or rear camera lens |
| 9. Select the environment lighting | 10. Camera lens |
| 11. Self portrait mirror | 12. Flash or spotlight |

How to Use the Camera?


Notes

For example, to take a self-portrait, face the light source and avoid dark surroundings or your back to the light source for better results

Press the  button on the Pocket PC.

Tap  > **Programs** > **Multimedia** > **Camera**.

Action	Instructions
Scenery or Portrait (Default)	1. Point the screen of the Pocket PC toward you. 2. Press half the  key to activate auto focus. When you hear beeps and the focus frame becomes green from red, press the same key to take a picture. 3. If the screenshot is good, press the camera shutter  on the side of the Pocket PC to take the picture.

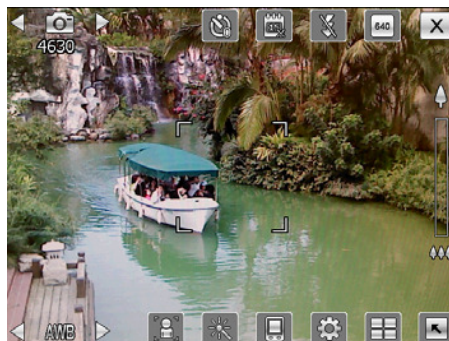

Action	Instructions
Scenery or Portrait (Default)	4. If you are in the camera mode from the guidance wizard, pressing the camera shutter will link you to the applications. For more information about the provided tools, please refer to the later descriptions.  5. Tap  to continue with the next shot.
Self Portrait	1. First tap  along the bottom of the screen. When the icon changes to , the front camera lens will be used.  2. Or flip the Pocket PC over and face the "self portrait mirror" beside the camera lens toward yourself. 3. If the screenshot is good, press the camera shutter  to take the picture.

Video


Instructions

Video

1. Switch to the video mode.
2. Face the Pocket PC toward you.
3. If the screenshot is good, press the camcorder key  on the side of the Pocket PC to begin filming.



4. During filming, you will see a red dot and flashing numbers of time lapsed at the upper left of the screen.

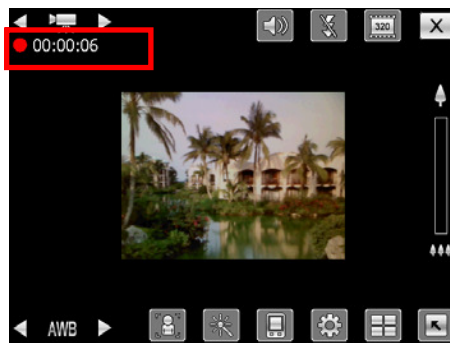

Video	Instructions
-------	--------------

Video

5. Press the camcorder key  again to stop filming. If you are in the video mode from the guidance wizard, stopping filming will link you to the applications. For more information about the provided tools, please refer to the later descriptions.




6. Tap  to continue with the next video segment.

Icon	Toolbar Description
	Continue to shoot or film
	Delete the current camera or camcorder
	Link to MMS Message or Messaging
	Link to Album
	When using camera mode, play or pause the video.
	When using " Continuous Shot " mode, go to the previous or next picture.

Common Tools for Camera

The **Camera** can be used to take pictures or videos. This chapter will introduce the common tools for camera and icons on the screen. The previous chapter introduces hardware hotkeys on the Pocket PC that can also control some of the tool icons shown on the screen.

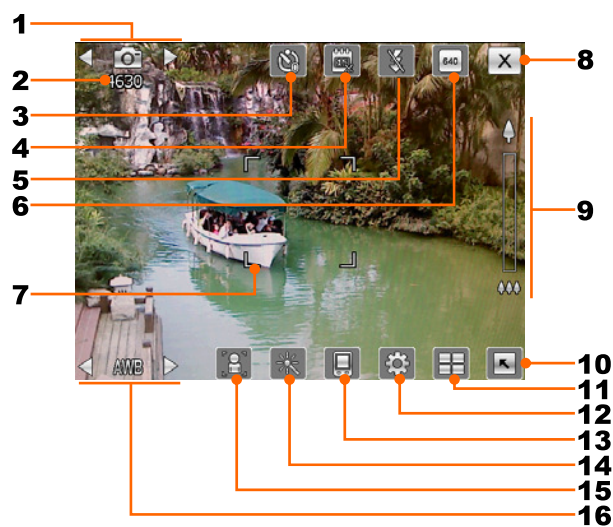

1. Switch to other camera or camcorder modes
2. Remaining shots
3. Timer for "self-timer"
4. Display or hide the date
5. Activate or disable the flash
6. Select the resolution, higher resolutions lead to larger picture files
7. Auto focus frame
8. Quit **Camera**
9. Digital zoom
10. Display or hide detailed information
11. Link to **Album** for browsing and managing files
12. Open the camera setup screen
13. Select the storage location
14. Select the special effect
15. Select front or rear camera lens
16. Select the environment lighting

Camera Modes


Tap ◀ or ▶ in ◀ [Camera Icon] ▶ button to switch to other camera modes.

Camera Mode	Description
	 Normal camera mode.
	 Camera mode with picture frame. Tap  to select picture frame or background.
	 Camera mode with GPS information.  becomes to white icon after the GPS position is fixed.

Camera Mode	Description
	 "Continuous Shot" camera mode. Tap  to select the number of shots.

Common Tools for Camcorder

The **Camera** can be used to take pictures or videos. This chapter will introduce the common tools for camcorder and icons on the screen. The previous chapter introduces hardware hotkeys on the Pocket PC that can also control some of the tool icons shown on the screen.

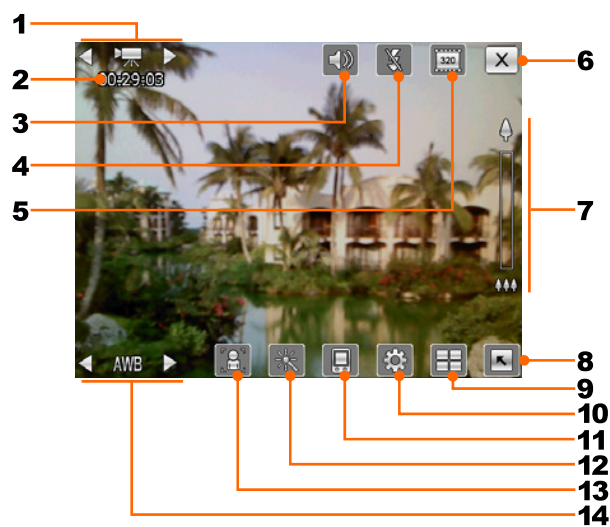


1. Switch to other camera or camcorder modes
2. Record status: When the recording begins, you will see a red dot.
3. Activate or disable the audio
4. Activate or disable the spotlight
5. Select the resolution, higher resolutions lead to larger video files
6. Quit **Camera**
7. Digital zoom
8. Display or hide detailed information
9. Link to **Album** for browsing and managing files
10. Open the camcorder setup screen
11. Select the storage location
12. Select the special effect
13. Select front or rear camera lens
14. Select the environment lighting

Camcorder Modes

Tap  or  in  button to switch to other camcorder modes.

Camcorder Mode	Description
	 Normal camcorder mode.
	 MMS camcorder mode.

Advanced Setup for Camera or Camcorder

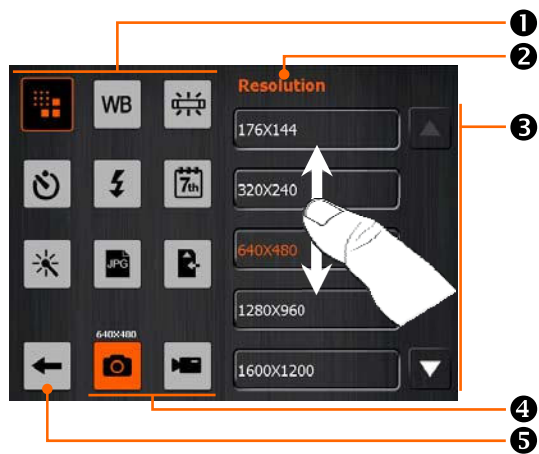

① Tap the  onscreen to open the advanced setup screen for the Camera.

② Tap to show the corresponding options for the function.

③ Options. Flick to scroll I up or down to see the options if the number of items exceeds a screen displaying.

④ Tap  or  to switch to the previous page or next page.

⑤ Tap to select camera or camcorder setup screen.

⑥ Tap  to save the settings.

Camera	Camcorder	Descriptions
		Select the resolution, higher resolutions lead to larger files.
		Select the environment lighting (white balance).
		Adjust for fluorescent light frequency.
	--	Activate " self-timer ;" a specific length of time can be set for " self-timer ."
		Activate or disable the flash or spotlight.
--		Activate or disable the audio.
	--	Display or hide the date.
		Select effects.
--		Select quality.
	--	Select file format.
--		Select file format; videos in the 3GP format can be played back on the PC.
		Select storage location.

Important Hints


1. When the "--" is shown, this indicates that the function is not supported under this mode.
2. When the camera lens is set to face the front, for example when you want to have a self portrait, the picture frame function will not be available.
3. Functions and options for various camera modes will be referred to the actual onscreen display, and will not be listed here in full.

Album

Tap  > **Programs** > **Multimedia** > **Album**.

You can use **Album** to manage and view multimedia information such as pictures, music, and videos.

Preview Album Information

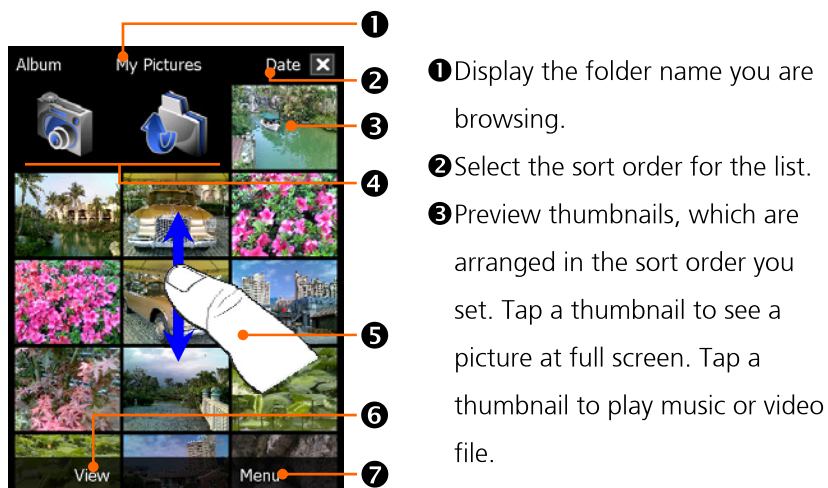

- ① Display the folder name you are browsing.
- ② Select the sort order for the list.
- ③ Preview thumbnails, which are arranged in the sort order you set. Tap a thumbnail to see a picture at full screen. Tap a thumbnail to play music or video file.

④  Link to **Camera**.


 Tap to move to the upper directory. Then select the folder you want to browse.

⑤ Flick to scroll up or down the list if the height of current page exceeds the screen.

⑥ Select other types or start the slide show.

⑦ Provides the relevant menu.

For example, select **Cut**, **Copy**, **Paste** or **Delete** to manage the selected file. Select **Slideshow Settings** to set the details.

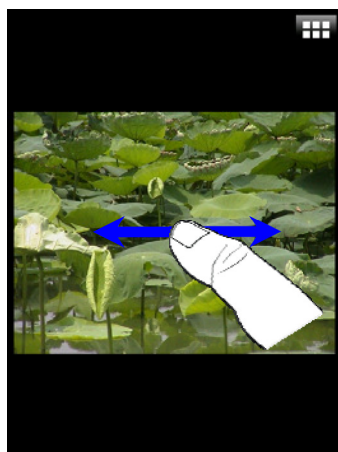

☛ Tap a thumbnail to see the picture at full screen.

❶ Flick to scroll left or right to browse the previous or next picture.

❷ If you enable the "Gravity Sensor Screen Orientation," you can turn your Pocket PC sideways to view the picture in landscape orientation.

❸ Tap on  or tap on the screen to display the pop-up menu.

☛ Tap on the screen to display the pop-up menu.

❶ Start the slide show. Tap anywhere on the screen to stop the slide show.

❷ Link to **MMS Message**. You can send the picture as an attachment.

❸ Link to **Messaging**. You can send the picture as an attachment.

❹ View information about this picture.


❺ Delete this picture.

❻ Quit the browsing screen.

❼ Browse the previous or next picture.


❽ Tap to zoom in or out.

❾ Tap outside the pop-up menu to abort it.

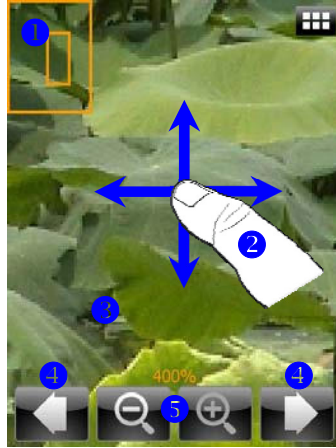

- Tap  to zoom in a picture.
- 1 In the zoom-in mode, the smaller frame shown left is part of the picture what you see on the screen.
 - 2 Flick to scroll left, right, up or down to view the part of picture exceeding the screen.
 - 3 Tap outside the pop-up menu to abort it.
 - 4 Browse the previous or next picture.
 - 5 Tap to zoom in or out.

Slideshow Settings

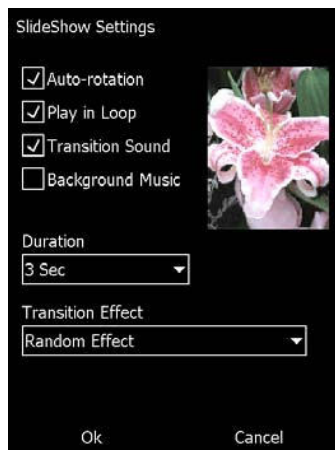

Tap **Album > Menu > Slideshow Settings**.

Namecard Manager

 > Programs > Multimedia > Namecard Manager.

Provides full name cards management for scanning paper name cards into a digital format. The contacts database from Pocket PC can also be integrated into a unified contacts book.


Digitize New Name Cards



1. Tap **Recognize**.

2. Tip: Before taking a picture, please take the following pointers to improve recognition quality.


- ❶ If the original name card is a landscape design, it is recommended that you rotate the Pocket PC before taking the picture.
- ❷ Keep the Pocket PC's camera lens at a distance of 10~12cm.
- ❸ Fill the four corners of the screen marked by red indicators with the name card.

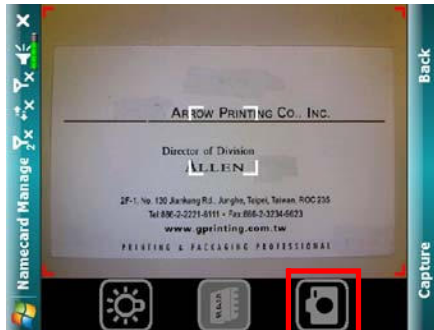

3. Take pictures

Prepare a name card and adjust the position. Press the shutter  to the side of the Pocket PC to take the shot.


■ You can directly select  on the screen to take a picture.

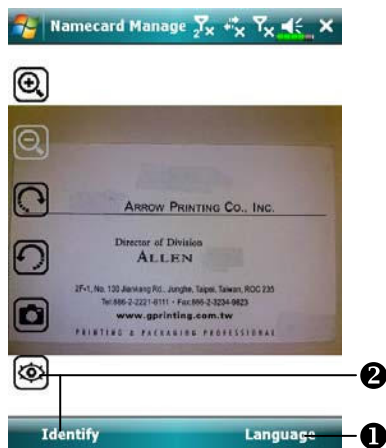

4. Name card recognition

❶ Select **Language** to choose the appropriate language for this name card.

❷ Select  or **Identify** to recognize the contents on the name card.

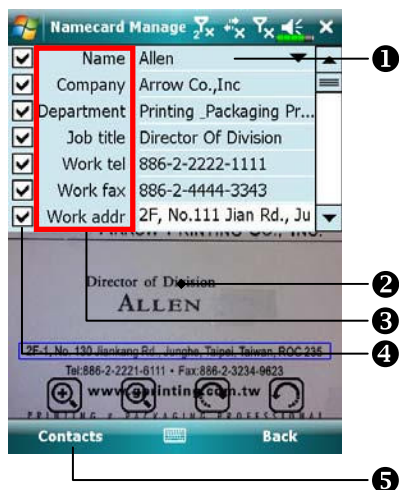

5. Modify the name card's contents and confirm

① Select the contents field to make modifications.

② When selecting the contents field, the name card source will be shown for verification. Double tap on the name card area to zoom to the max viewing.

③ Select the field name to modify and adjust the error recognitions.

④ Choose whether to keep this data entry.


⑤ Add this name card to the contacts database on the Pocket PC. Go back to **Contacts** to view the new entry.

Icon	Meaning
 	Enable or disable the flashlight.
 	Select storage path
	Take a picture. Identical to the  shutter at side of a Pocket PC. If the result is not satisfactory, retake the picture.
 	Increase or decrease zoom.
 	Rotate left or right.
	Identify name card.

Name Cards Management



1. Tap **Manage**.

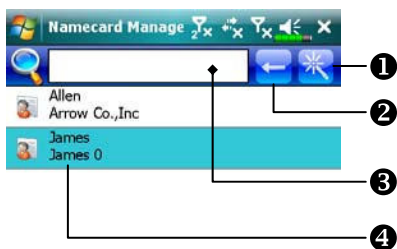

2. Main screen for name card

management

Only recognized name cards will be shown here.

① Enter the quick search page. Tap a letter and the results for name cards created in **Namecard Manager** will be shown.

② Delete the entered text to the left.

③ Search criteria for name card. All matching name cards for “Name, Work, or Tel” will be shown on the screen. To search for all name cards, please leave the field blank.



④ Name card index display area, select an entry to expand its contents.

⑤ Display area for the original name card.

⑥ Provides the relevant menu.


New: Create a new digital name card.

Import: Supported format includes BMP, JPG, and PNG. An existing name card image file can be imported and then processed.

Edit: Modify the name card information.

Delete: Delete the selected name card.

⑦ Return to the previous page.

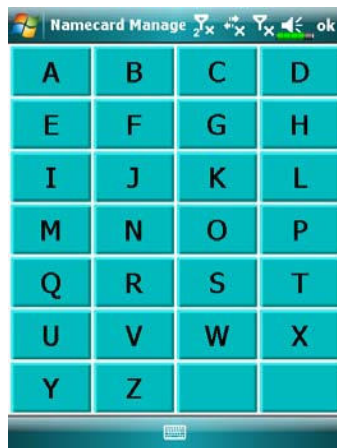

3. Quick search screen

After selecting a letter, the name cards created in **Namecard**

Manager will be shown. The matching name or company entries will be shown on the name cards management list.

11 Companion Programs


Microsoft® Pocket Outlook includes **Calendar**, **Contacts**, **Tasks**, **Messaging**, and **Notes**. You can use these programs individually or together. For example, e-mail addresses stored in **Contacts** can be used to address e-mail messages in **Messaging**.

Using synchronization tools, you can synchronize information in Microsoft Outlook or Microsoft Exchange on your desktop computer with your Pocket PC. You can also synchronize this information directly with a Microsoft Exchange server. Each time you synchronize, synchronization tools compare the changes you made on your Pocket PC and desktop computer or server and updates both computers with the latest information. For information on using synchronization tools, see Help on the desktop computer.

You can switch to any of these programs by tapping them on the  menu.

Calendar: Scheduling Appointments and Meetings

Use **Calendar** to schedule appointments, including meetings and other events. You can check your appointments in one of several views (Agenda, Day, Week, Month, and Year) and easily switch views by using the **View** menu.

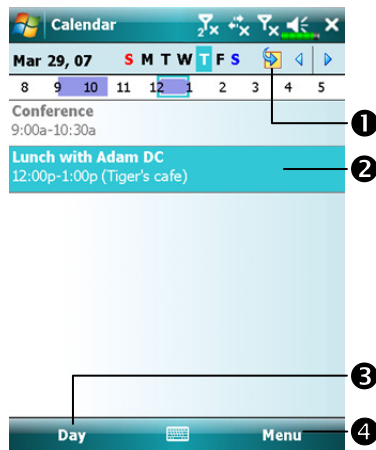


- ❶ Tap to go to today.
- ❷ Tap to display or edit the appointment details.
- ❸ **View** menu.
- ❹ Tap **Menu** and then **New Appointment** to create a new appointment.

Notes

You can customize the Calendar display, such as changing the first day of the week, by tapping **Menu > Tools > Options**.

Create an Appointment

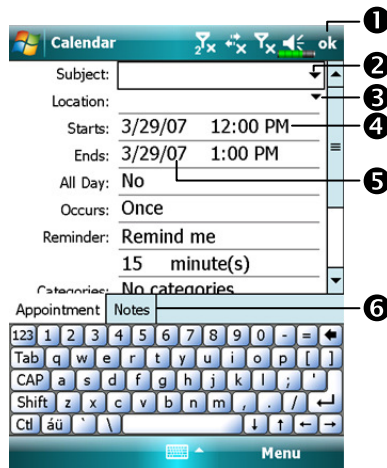

- ❶ Tap to return to the calendar (the appointment is saved automatically).
- ❷ Tap to choose from predefined text.
- ❸ Tap to choose from previously entered locations.
- ❹ Tap to select a time.
- ❺ Tap to select a date.
- ❻ Notes is a good place for maps and directions.


1. If you are in Day or Week view, tap the desired date and time for the appointment.
2. Tap **Menu** and then **New Appointment**.
3. Using the input panel, enter a description and a location. Tap first to select the field.
4. If needed, tap the date and time to change them.
5. Enter other desired information. You will need to hide the input panel to see all available fields.
6. To add notes, tap the **Notes** tab. You can enter text, draw, or create a recording. For more information on creating notes, see “Notes: Capturing Thoughts and Ideas” section.
7. When finished, tap **ok** to return to the calendar.

Notes

If you select **Remind me** in an appointment, your Pocket PC will remind you according to the options set in  > **Settings** > **Personal** tab > **Sounds & Notifications**.

Use the Summary Screen

When you tap an appointment in **Calendar**, a summary screen is displayed. To change the appointment, tap **Edit**.



① View appointment details.

② View.

③ Tap **Menu** and then **Edit** to change appointment.



Create Meeting Requests

You can use **Calendar** to set up meetings with users of Outlook or Pocket Outlook. The meeting request will be created automatically and sent either when you synchronize Inbox or when you connect to your e-mail server. Indicate how you want meeting requests sent by tapping **Menu** > **Tools** > **Options**.

Schedule a Meeting

1. Create an appointment.
2. In the appointment details, hide the input panel, and then tap **Attendees**.
3. From the list of e-mail addresses you've entered in **Contacts**, select the meeting attendees.


The meeting notice is created automatically and placed in the Outbox folder.

For more information on sending and receiving meeting requests, see **Calendar** Help and **Messaging** Help on the Pocket PC.

Contacts

Contacts maintains a list of your friends and colleagues, in which you can easily manage or find their information on this device.

To enter Contacts screen, tap  > **Contacts**.

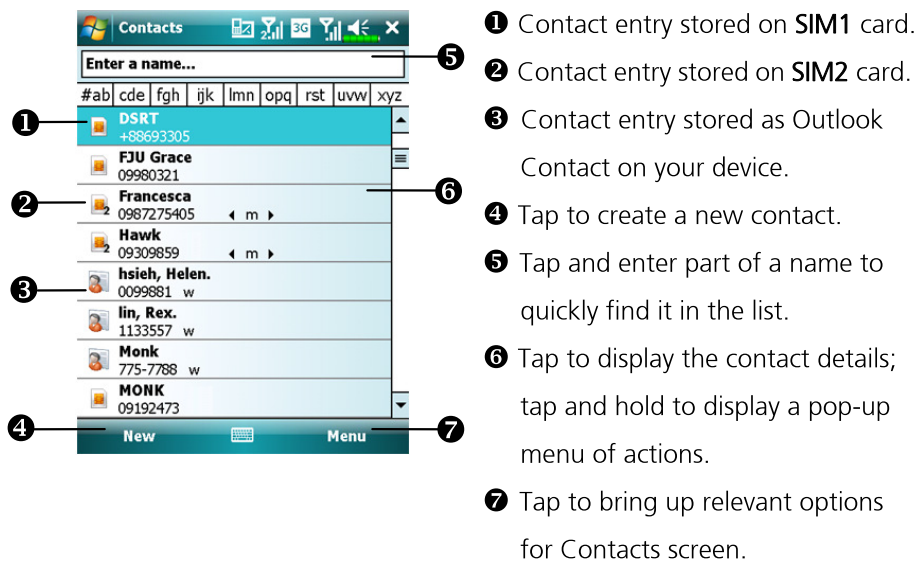

Finding a Contact

Contact list shows altogether contacts on your SIM card, **SIM2** card and device.


To find a contact, try the following methods:

1. On the contact list, enter a contact name in the box under the navigation bar; to show all contacts again, clear the text in the box.
2. In the contact list, tap **Menu** > **Filter** and then select the type of contact that you want displayed.

- To show all contacts again, select **All Contacts**.
 - To view a contact not assigned to a category, select **No Categories**.
 - To look for **SIM2** contacts, check **SIM2** Contacts to sort out the contacts stored on **SIM2**.
3. To view the names of companies your contacts work for, in the contact list, tap **Menu > View By > Company**. The number of contacts that work for that company will be displayed to the right of the company name.
 4. Tap  > **Programs > Search**, enter the contact name, select **Contacts** for the type, and then tap **Search**.

Managing Your Contacts

On **Contacts** list, tap **Menu** for more actions:

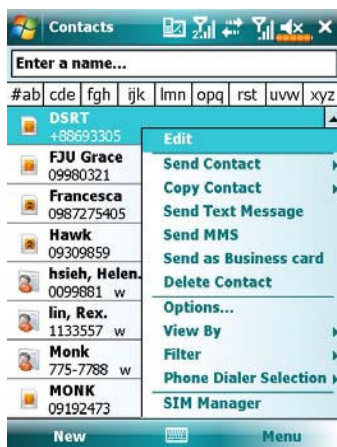

- To edit a chosen contact, select **Edit** to modify the contact information.
- To duplicate a contact entry to your device or SIM phonebook, select **Copy Contact > To SIM / To SIM2** or **To Contacts**.
- To share contact with other devices, select **Send Contact > Beam** to send this entry via **Bluetooth**, or **Messages** to send it via text-messaging.
- To switch your current selected phone, tap **Menu > Phone Dialer Selection >** and then choose between **Phone1** or **Phone2**.

Creating a Contact



1. On Contacts screen, tap **New**, and then select a contact type.
 - To create a contact on your device, select **Outlook Contact**, hereafter you can manage this contact even if the SIM card is absent.
 - To create a contact on either **SIM1** or **SIM2** card, select **SIM Contact** or **SIM2 Contact**. To manage your contact entries, you can also go to  > **Programs > Phone > SIM Manager**.
2. Use the input panel to enter a name and other contact information. You will need to scroll down to see all available fields.
3. To assign the contact to a category, scroll to and tap **Categories** and select a category from the list. In the contact list, you can display contacts by category.
4. To add notes, tap the **Notes** tab. You can enter text, draw, or create a recording. For more information on creating notes, see “Notes: Capturing Thoughts and Ideas” section.
5. When editing is finished, tap **ok** to return to the contact list.

Using the Summary Screen

When you tap a contact in the contact list, a summary screen is displayed.




❶ View contact details. All of the available contact information is listed, you can tap and use easily.

❷ Provides the relevant menu. For example, select **Edit** to change the contact information. Or select **Save to SIM** or **Save to Contacts** to duplicate to **Contacts** or SIM phonebook.

❸ Tap to view notes.

Tasks: Keeping a To Do List

Use **Tasks** to keep track of what you have to do.

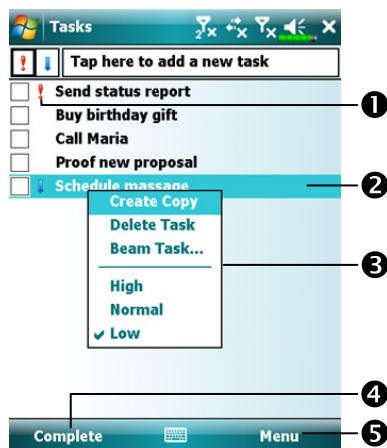


- ❶ Indicates high priority.
- ❷ Tap to display or edit the task details.
- ❸ Tap and hold to display a pop-up menu of actions.
- ❹ Tap to change the status.
- ❺ Provides the relevant menu.

For example, tap **Filter** to select the category of tasks you want displayed in the list. Tap **Sort By** to select the sort order of the list. Or tap **Options** to change the way information is displayed in the list.

Create a Task

1. Tap **Menu** and then **New Task**.
2. Using the input panel, enter a description.
3. You can enter a start date and due date or enter other information by first tapping the field. If the input panel is open, you will need to hide it to see all available fields.
4. To assign the task to a category, tap **Categories** and select a category from the list. In the task list, you can display tasks by category.
5. To add notes, tap the **Notes** tab. You can enter text, draw, or create a recording. For more information on creating notes, see “Notes: Capturing Thoughts and Ideas” section.
6. When finished, tap **ok** to return to the task list.

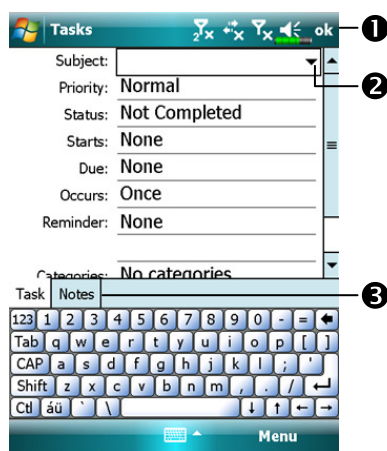


- 1 Tap to return to the task list (the task is saved automatically).
- 2 Tap to choose from predefined subjects.
- 3 Notes is a good place for maps and drawings.

Notes

To quickly create a task with only a subject, check **Show Tasks entry bar** on the **Options** menu. Then, tap “**Tap here to add a new task**” and enter your task information.

Use the Summary Screen

When you tap a task in the task list, a summary screen is displayed. To change the task, tap **Edit**.

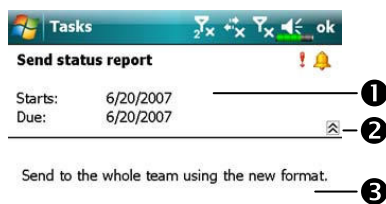


- ① View task details.
- ② Tap to show and hide additional summary information.
- ③ View notes.
- ④ Tap to change task.



Notes: Capturing Thoughts and Ideas


Quickly capture thoughts, reminders, ideas, drawings, and phone numbers with **Notes**. You can create a written note or a recording. You can also include a recording in a note. If a note is open when you create the recording, it will be included in the note as an icon. If the note list is displayed, it will be created as a stand-alone recording.

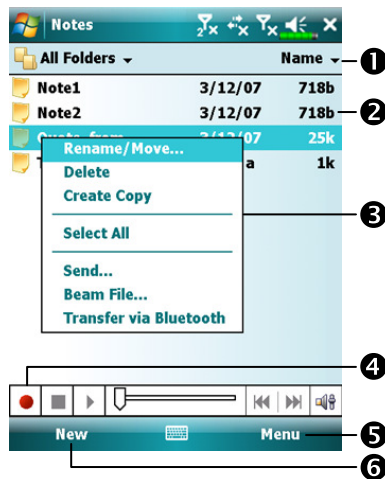

- ❶ Tap to change the sort order of the list.
- ❷ Tap to open a note or play a recording.
- ❸ Tap and hold to display a pop-up menu of actions.
- ❹ Tap to record.
- ❺ Provides the relevant menu. For example, check **View Recording Toolbar** to show the Recording toolbar.
- ❻ Tap to create a new item.

Create a Note

1. Tap **New**.
2. Create your note by writing, drawing, typing, and recording. For more information about using the input panel, writing and drawing on the screen, and creating recordings, see "Enter Information on Your Pocket PC."

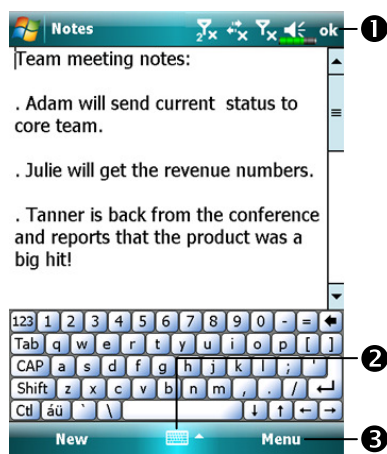


- 1 Tap to return to the note list (the note is saved automatically).
- 2 Tap to show or hide the input panel.
- 3 Provides the relevant menu.
For example, check **View Recording Toolbar** to add a recording to the note; or check **Draw** to write on the screen.

Word Mobile

Word Mobile works with Microsoft Word on your desktop computer to give you easy access to copies of your documents. You can create new documents on your Pocket PC, or you can copy documents from your desktop computer to your Pocket PC. Synchronize documents between your desktop computer and your Pocket PC so that you have the most up-to-date content in both locations.

Use Word Mobile to create documents, such as letters, meeting minutes, and trip reports. To create a new file, tap  > **Office Mobile, Word Mobile** > **New**. A blank document appears. Or, if you've selected a template for new documents in the **Options** dialog box, that template appears with appropriate text and formatting already provided. You can open only one document at a time; when you open a second document, you'll be asked to save the first. You can save a document you create or edit in a variety of formats, including Word Document, Document Template, Rich Text Format, and Plain Text.

Word Mobile contains a list of the files stored on your Pocket PC. Tap a file in the list to open it. To delete, make copies of, and send files, tap and hold a file in the list. Then, select the appropriate action on the pop-up menu.

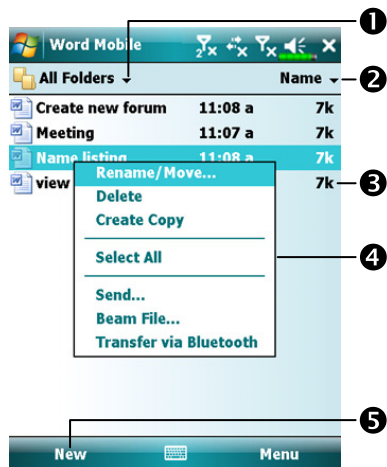

- ❶ Select the type of folder you want displayed in the list.
- ❷ Tap to change the sort order of the list.
- ❸ Tap to open a document.
- ❹ Tap and hold an item to see a pop-up menu of actions.
- ❺ Tap to create a new document.


Notes

You can change the zoom magnification by tapping **View** and then **Zoom**. Then select the percentage you want. Select a higher percentage to enter text and a lower one to see more of your document.

If you're opening a Word document created on a desktop computer, check **Wrap to Window** on the **View** menu so that you can see the entire document.

Using the input panel, enter typed text into the document. For more information on entering typed text, see "Enter Information on Your Pocket PC."

To format existing text and to edit text, first select the text. You can select text as you do in a Word document, using your stylus instead of the mouse to drag through the text you want to select. You can search a document to find text by tapping **Menu**, **Edit** and then **Find/Replace**.

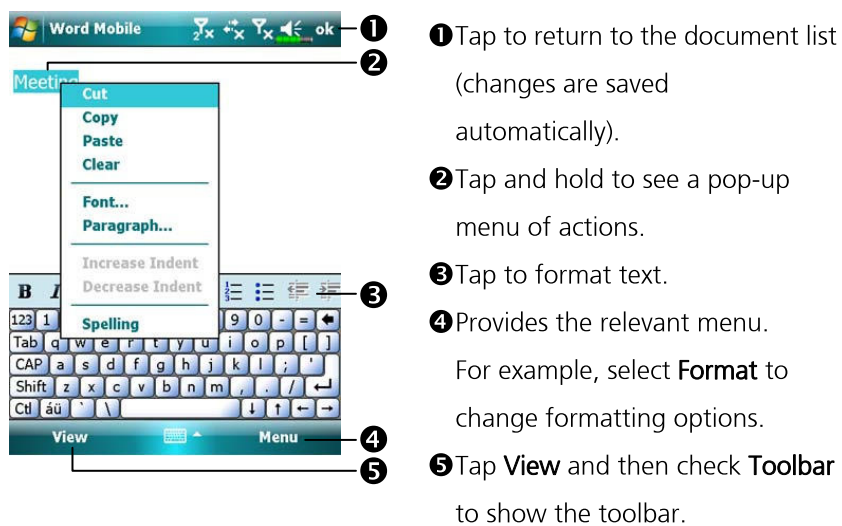


Excel Mobile

Excel Mobile works with Microsoft Excel on your desktop computer to give you easy access to copies of your workbooks. You can create new workbooks on your Pocket PC, or you can copy workbooks from your desktop computer to your Pocket PC. Synchronize workbooks between your desktop computer and your Pocket PC so that you have the most up-to-date content in both locations.


Use Excel Mobile to create workbooks, such as expense reports and mileage logs. To create a new file, tap  > **Office Mobile** > **Excel Mobile** > **New**. A blank workbook appears. Or, if you've selected a template for new workbooks in the **Options** dialog box, that template appears with appropriate text and formatting already provided. You can open only one workbook at a time; when you open a second workbook, you'll be asked to save the first.

Excel Mobile contains a list of the files stored on your Pocket PC. Tap a file in the list to open it. To delete, make copies of, and send files, tap and hold a file in the list. Then select the appropriate action from the pop-up menu.

Excel Mobile provides fundamental spreadsheet tools, such as formulas, functions, sorting, and filtering. To display the toolbar, tap **View** and then check **Toolbar**.

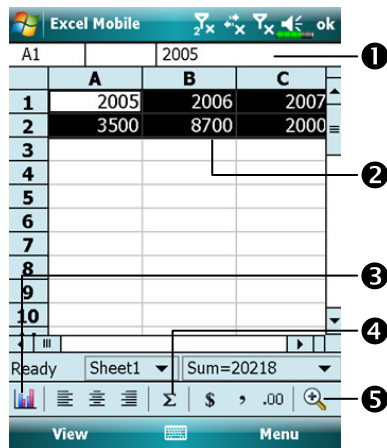

- ❶ Cell contents appear here as you enter them.
- ❷ Select cell contents for the resource of chart.
- ❸ Insert Chart button
- ❹ AutoSum button
- ❺ Zoom button

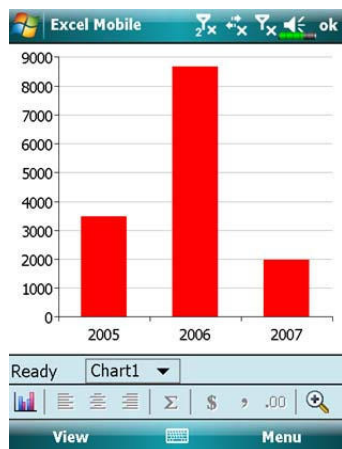

- ⌂ Tap **Format Chart** button to modify the relevant information, such as titles, scale, type and series.


Tips for Working in Excel Mobile

For more information on using Excel Mobile, tap  > **Help**. Note the following when working in large worksheets in Excel Mobile:


- View in full-screen mode to see as much of your worksheet as possible. Tap **View** and then check **Full Screen**. To exit full-screen mode, tap **View** and then **Full Screen** to restore.
- Show and hide window elements. Tap **View**, **Show** and then tap the elements you want to show or hide.
- Freeze panes on a worksheet. First select the cell where you want to freeze panes. Tap **View** and then **Freeze Panes**. You might want to freeze the top and leftmost panes in a worksheet to keep row and column labels visible as you scroll through a sheet.
- Split panes to view different areas of a large worksheet. Tap **View** and then **Split**. Then drag the split bar to where you want it. To remove the split, tap **View** and then **Remove Split**.
- Show and hide rows and columns. To hide a row or column, select a cell in the row or column you want to hide. Then tap **Menu**, **Format**, then **Row** or **Column**, and then **Hide**. To show a hidden row or column, tap **Menu**, **Format**, then **Row** or **Column**, and then **Unhide**.

PowerPoint Mobile

View PowerPoint slides created in PowerPoint 97 and above versions on your desktop computer. The supported formats include .ppt and .pps files.

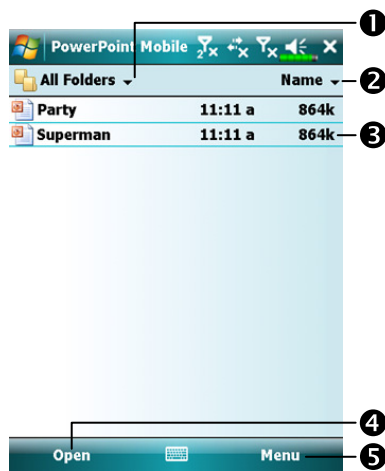


- ❶ Select the type of folder you want displayed in the list.
- ❷ Tap to change the sort order of the list.
- ❸ Tap to open a file, and play the slides.
- ❹ Tap to open the file you played last time.
- ❺ Provides the relevant menu.

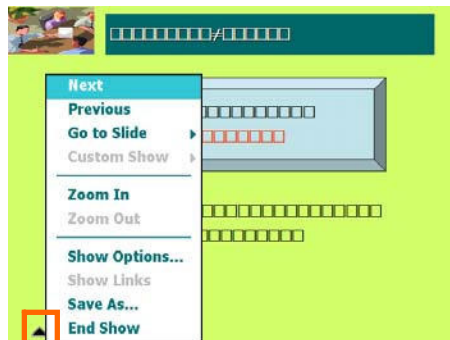


- ⌂ Tap ▲ on the lower left corner to open the menu.
- Tap **End Show** to quit.

Windows Media Player

Use Microsoft Windows Media Player for Pocket PC to play digital audio and video files that are stored on your Pocket PC or on a network. To switch to Windows Media Player for Pocket PC, tap  > **Programs** > **Windows Media**.

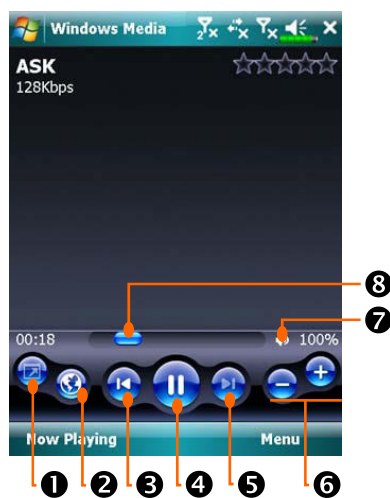

- ❶ Use full-screen to view video.
- ❷ Display website. Find music or video to be played from website.
- ❸ Return to the start of the current file or previous file.
- ❹ Tap to play or pause.
- ❺ Tap to skip to the next song.
- ❻ Tap to adjust volume.
- ❼ Audio/mute
- ❽ Indicates the progress of the current track.

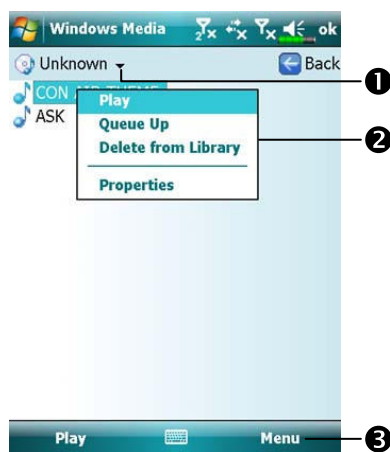

- ⌂ To enter the screen shown on the left, tap **Menu** and then **Library**.
- ❶ Select **Library**.
- ❷ Tap and hold the file or folder to be played, then tap **Play** or **Queue Up**.
- ❸ **Menu** button: Tap **Open File** to play files that do not belong to the current library. Tap **Update Library** to update the file list.

Use Microsoft Windows Media Player on your desktop computer to copy digital audio and video files to your Pocket PC.


For more information about using Windows Media Player for Pocket PC, tap

 > **Help**.

Streaming Player

Tap  > **Programs** > **Streaming Player**.

Some audio and movie files that cannot be played back from Microsoft Windows Media Player, for example RTSP, HTTP... types of files, will be automatically switched to **Streaming Player** by the system.

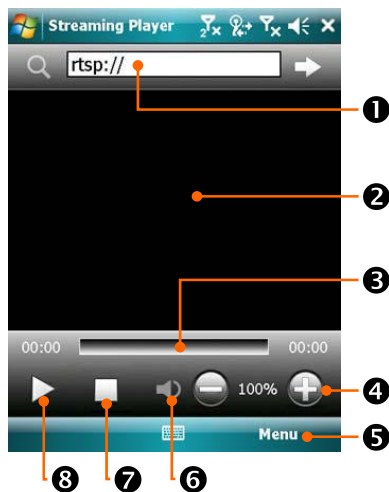

- ① Automatically launch the **Streaming Player** for playback when using **Internet Explorer** to run media files not supported by **Windows Media**. Tap in to enter the website address and media file name.
- ② View the video. Tapping in this area during playback will enable full-screen video content. Tapping the screen again will return to the normal display mode.
- ③ Indicates the current position in the track.
- ④ Adjust volume level.
- ⑤ Provides the relevant menu.
- ⑥ Mute or enable sound.
- ⑦ Stop.
- ⑧ Play or pause.

Internet Explorer

Using Internet Explorer

Use Microsoft® Internet Explorer Mobile to view Web or WAP pages in either of these ways:

- During synchronization with your desktop computer, download your favorite links and mobile favorites that are stored in the Mobile Favorites subfolder in Internet Explorer on the desktop computer.
- Connect to an Internet service provider (ISP) or network and browse the Web. To do this, you'll need to create the connection first, as described in "Connect to the Internet".


When connected to an ISP or network, you can also download files and programs from the Internet or intranet.

To switch to Pocket Internet Explorer, tap  > **Internet Explorer**.

Browse the Internet

Refer to “Connecting to the Internet” section to connect the Pocket PC to the Internet and start browsing websites.

1. Tap  > **Internet Explorer**.
2. Input the site address into the address bar at the top of the screen and connect to this site.
3. Use the scroll bar at the right side or bottom of the screen, or press the up or down button on the Pocket PC to view the contents of the entire website.

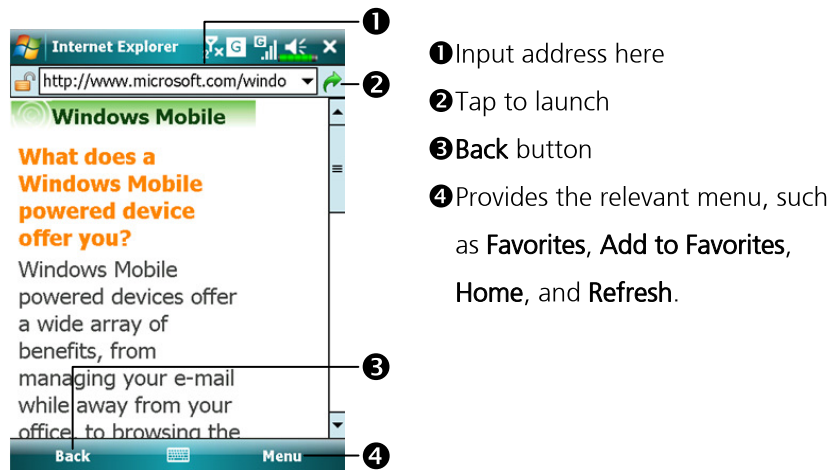


Aside from keying in the address directly, you can also connect to websites using the following methods.

- Tap the **Favorites** button, and then tap the favorite you want to view.
- In the address bar, tap the arrow ▼ to choose from previously entered addresses.

Notes

To add a favorite link while using the Pocket PC, go to the page you want to add, tap and hold on the page, and tap **Add to Favorites**.

View Mobile Favorites and Channels



① Tap the favorite you want to view.

② Tap to add or delete a folder or favorite link.



1. Tap the **Favorites** button to display your list of favorites.

2. Tap the page you want to view.

You'll see the page that was downloaded the last time you synchronized with your desktop computer. If the page is not on your Pocket PC, the favorite will be dimmed. You will need to synchronize with your desktop computer again to download the page to your Pocket PC, or connect to the Internet to view the page.

The Mobile Favorites Folder

Only items stored in the Mobile Favorites subfolder in the Favorites folder in Internet Explorer on your desktop computer will be synchronized with your Pocket PC. This folder was created automatically when you installed synchronization tools.

Favorite Links

During synchronization, the list of favorite links in the Mobile Favorites folder on your desktop computer is synchronized with Pocket Internet Explorer on your Pocket PC. Both computers are updated with changes made to either list each time you synchronize. Unless you mark the favorite link as a mobile favorite, only the link will be downloaded to your Pocket PC, and you will need to connect to your ISP or network to view the content. For more information on synchronization, see Help on the desktop computer.

Synchronize Mobile Favorites

If you are using Microsoft Internet Explorer 5.0 or later on your desktop computer, you can download mobile favorites to your Pocket PC. Synchronizing mobile favorites downloads Web content to your Pocket PC so that you can view pages while you are disconnected from your ISP and desktop computer.

Use the Internet Explorer plug-in installed with synchronization tools to create mobile favorites quickly.

Create a Mobile Favorite

1. In Internet Explorer on your desktop computer, click **Tools** and then **Create Mobile Favorite**.
2. To change the link name, enter a new name in the **Name** box.
3. Optionally, in **Update**, select a desired update schedule.
4. Click **OK**. Internet Explorer downloads the latest version of the page to your desktop computer.

5. Synchronize your Pocket PC and desktop computer. Mobile favorites that are stored in the Mobile Favorites folder in Internet Explorer are downloaded to your Pocket PC.

Notes

If you did not specify an update schedule in step 3, you will need to manually download content to keep the information updated on your desktop computer and Pocket PC. Before synchronizing with your Pocket PC, in Internet Explorer on your desktop computer, click **Tools** and then **Synchronize**. You will see the last time content was downloaded to the desktop computer, and you can manually download content if needed.

You can add a button to the Internet Explorer toolbar for creating mobile favorites. In Internet Explorer on your desktop computer, click **View, Toolbars**, and then **Customize**.

Save Pocket PC Memory

Mobile favorites take up storage memory on your Pocket PC. To minimize the amount of memory used:

- In the settings for the Favorites information type in synchronization tools options, turn off pictures and sounds, or stop some mobile favorites from being downloaded to the Pocket PC. For more information, see Help.
- Limit the number of downloaded linked pages. In Internet Explorer on the desktop computer, right-click the mobile favorite you want to change and then **Properties**. In the **Download** tab, specify 0 or 1 for the number of linked pages you want to download.

11-30

12 Maintaining the Pocket PC

Backup Utility

Tap  > **Programs** > **Utilities** > **Backup Utility**.

Backup Utility is used to back up or restore files saved in the Pocket PC. You can back up personal data such as **Calendar, Contacts, Tasks, Personal profile, Network settings, Messaging** (E-mails and SMS), etc.

Storage Space

When making backups, you can choose the following storage spaces:


1. My Documents: Data saved here may disappear when you perform a cold boot. It is recommended that you use this area only as temporary storage.
2. External storage card.

Backup Files

Wizard Mode




- ❶ Tap **Backup**.
- ❷ Tap **Next** button and the Wizard will guide through the steps that follow.
- ❸ **Standard**: Switch to the Standard mode.



Standard Mode

Backup your personal data to a storage space.

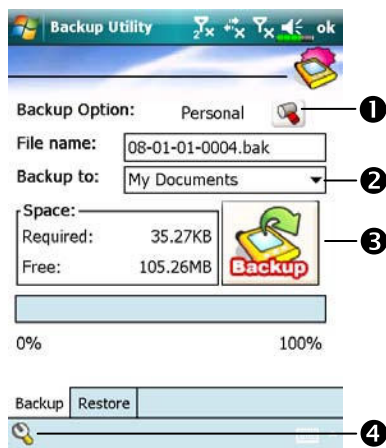

- ❶ Tap the **Backup** tab.
- ❷ Tap to check the items for backup.
- ❸ Tap to select the storage space from the list.
- ❹ Tap **Backup** button to start the backup.
- ❺ **Advanced** button: Enter the Advanced settings screen.

Advanced Settings Options

Under the Backup Files screen, tap  **Advanced** button to enter the Advanced settings screen as shown below.



☞ Check the options as required.

❶ If you check this option, the Wizard will guide you through the steps to complete the operation the next time you open **Backup Utility**.

❷ Cancel button

❸ OK button





☞ If you checked “**Auto backup files**,” tap  to enter the screen shown on the left.

❶ Select the backup option.

❷ Select the site to backup to.

❸ Pocket PC performs auto backup when the battery power is low.

❹ To backup regularly, tap  to select “**Auto Backup on schedule**.”

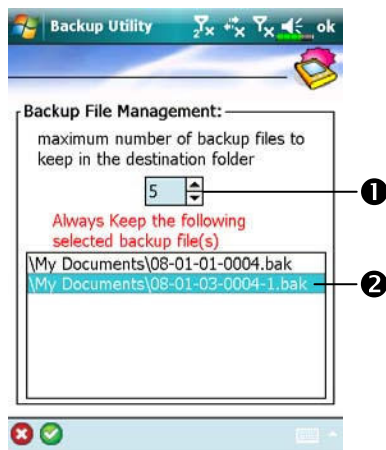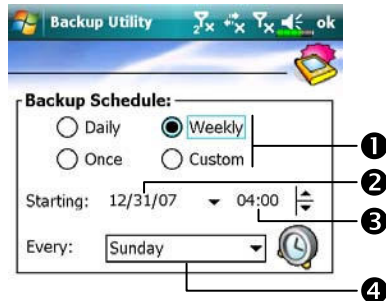

➡ If you checked “Auto backup on schedule,” tap to enter the screen shown on the left.

- ➊ Backup frequency.
- ➋ Tap the date button on the right of “Starting” to set the starting date.
- ➌ Tap the time button on the right of “Starting” to set the starting time.
- ➍ If you have selected “Weekly,” tap the function button on the right of “Every” to set the day of the week to backup.

➡ If you selected “Manage old backup files,” tap to enter the screen shown on the left.

- ➊ Tap the arrowhead to set the number of files.
- ➋ Tap the files to be retained.

Restore Files


Caution!

1. When restoring files, the system will delete all current data in the Pocket PC and replace it with the backup files.
2. To make sure that files can be restored successfully, do not use the Pocket PC while performing restore.
3. Restore cannot be stopped once it is started. Think carefully before proceeding.
4. After restore completed, your Pocket PC will reboot.

Wizard Mode




- 1 Tap **Restore**.
- 2 Tap  **Next** button and the Wizard will guide through the steps that follow.
- 3  **Standard**: Switch to the Standard mode.



Standard Mode

Restore the backup personal data from a storage space.

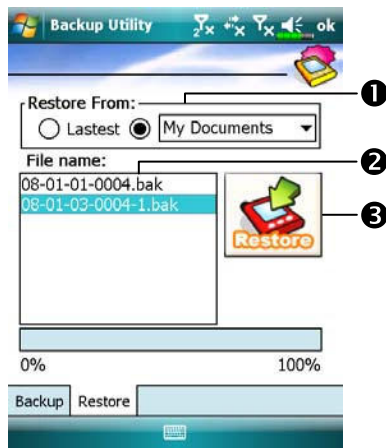

Tap the **Restore** tab.

❶ Select “**Latest**” below “**Restore From.**” Or select from the list.

❷ Tap backup file name from the list under “**File Name.**”

❸ Tap  **Restore** button to start restoring.

Adding or Removing Programs

Programs added to your Pocket PC at the factory are stored in ROM (read-only memory). You cannot remove this software, and you'll never accidentally lose ROM contents. All other programs and data files added to your Pocket PC after factory installation are stored in RAM (random access memory).

You can install any program created for your Pocket PC, as long as your Pocket PC has enough memory. The most popular place to find software for your Pocket PC is on the Pocket PC Web site (<http://www.microsoft.com/windowsmobile/pocketpc/>).

Add Programs Using Synchronization Tools

You'll need to install the appropriate software for your Pocket PC on your desktop computer before installing it on your Pocket PC.

1. Determine your Pocket PC and processor type so that you know which version of the software to install. Tap  > **Settings**. On the **System** tab, tap **About**. In the **Version** tab, make a note of the information in **Processor**.
2. Download the program to your desktop computer (or insert the CD or disk that contains the program into your desktop computer). You may see a single *.xip, *.exe, or *.zip file, a Setup.exe file, or several versions of files for different Pocket PC types and processors. Be sure to select the program designed for the Pocket PC and your Pocket PC processor type.
3. Read any installation instructions, Read Me files, or documentation that comes with the program. Many programs provide special installation instructions.
4. Connect your Pocket PC and desktop computer.

5. Double-click the *.exe file.

- ❶ If the file is an installer, the installation wizard will begin. Follow the directions on the screen. Once the software has been installed on your desktop computer, the installer will automatically transfer the software to your Pocket PC.
- ❷ If the file is not an installer, you will see an error message stating that the program is valid but it is designed for a different type of computer. You will need to move this file to your Pocket PC. If you cannot find any installation instructions for the program in the Read Me file or documentation, use synchronization tools **Explore** to copy the program file to the Program Files folder on your Pocket PC. For more information on copying files using synchronization tools, see Help.


Once installation is complete, tap  > **Programs**, and then the program icon to switch to it.

Add a Program Directly from the Internet

1. Determine your Pocket PC and processor type so that you know which version of the software to install. Tap  > **Settings**. On the **System** tab, tap **About**. In the **Version** tab, make a note of the information in **Processor**.
2. Download the program to your Pocket PC straight from the Internet using Pocket Internet Explorer. You may see a single *.xip, *.exe or *.zip file, a Setup.exe file, or several versions of files for different Pocket PC types and processors. Be sure to select the program designed for the Pocket PC and your Pocket PC processor type.
3. Read any installation instructions, Read Me files, or documentation that comes with the program. Many programs provide special installation instructions.
4. Tap the file, such as a *.xip or *.exe file. The installation wizard will begin. Follow the directions on the screen.

Add a Program to the Start Menu

Tap  > **Settings** > **Personal** tab > **Menus**.

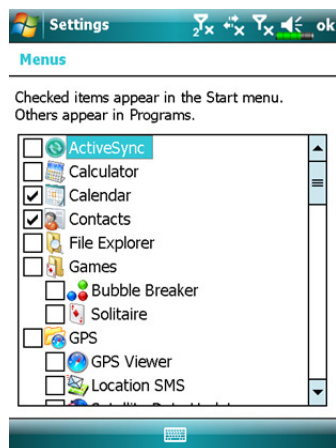

 Check the box for the program.


If you do not see the program listed, you can either use **File Explorer** on the Pocket PC to move the program to the Start Menu folder, or use synchronization tools on the desktop computer to create a shortcut to the program and place the shortcut in the Start Menu folder.

- Using File Explorer on the Pocket PC: Tap  > **Programs** > **File Explorer**, and locate the program (tap the folder list, labeled **My Documents** by default, and then **My Device** to see a list of all folders on the Pocket PC). Tap and hold the program and tap **Cut** on the pop-up menu. Open the **Start Menu** folder located in the **Windows** folder, tap and hold a blank area of the window, and tap **Paste** on the pop-up menu. The program will now appear on the  menu.

- Using synchronization tools on the desktop computer: Use the Explorer in synchronization tools to explore your Pocket PC files and locate the program. Right-click the program and then click **Create Shortcut**. Move the shortcut to the **Start Menu** folder in the **Windows** folder. The shortcut now appears on the  menu. For more information, see Help.

Remove Programs

Tap  > **Settings**. On the **System** tab, tap **Remove Programs**.

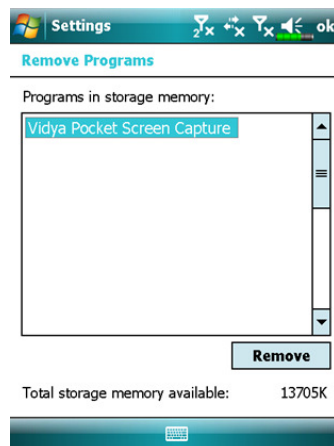


Tap a program name from the list under “**Programs in storage memory**” to highlight it and then tap **Remove**.

If the program does not appear in the list of installed programs, use **File Explorer** on your Pocket PC to locate the program, tap and hold the program, and then tap **Delete** on the pop-up menu.

Manage Memory

View Memory Status


Tap  > **Settings** > **System** tab > **Memory**.



← Tap the **Main** tab.

❶ The status of Storage and Program memory.

❷ Find: Quick link to the **Search** program.

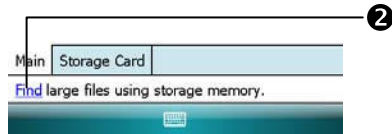

← Tap the **Storage Card** tab.

❶ Current storage card memory status.


❷ Tap to select the built-in or external storage card.




Find Available Memory

Under certain circumstances such as insufficient memory, the Pocket PC cannot allocate memory automatically. Try to solve this problem through the following methods:

Tap  > **Programs** > **Search**.



1. To find files occupying larger amounts of memory, select “**Larger than 64 KB**” for type and tap **Search**.
2. Then use File Explorer.

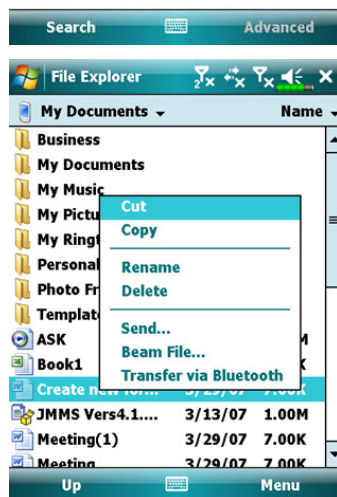

1. Tap  > **Programs** > **File Explorer**. Use **File Explorer** to move the files you want to keep to external storage cards. Tap and hold the items to be moved, then tap **Cut** or **Copy** on the pop-up menu. Move to the storage card and then tap **Paste**.
2. Use **File Explorer** to delete files that you no longer need.



Tap  > Messaging > Menu > Tools > Options > Storage tab.

☞ Check “Store attachments on storage card” to save attached files from E-mails automatically in the storage card in future.



Tap  > Internet Explorer > Menu > Tools > Options > Memory tab

☞ Tap Clear History and Delete Files to delete records of websites that you have browsed.




Tap  > Programs > Notes/Word Mobile/Excel Mobile > Menu > Options.



1. Enter the **Notes** file list screen.

2. Tap **Menu** and then **Options**.

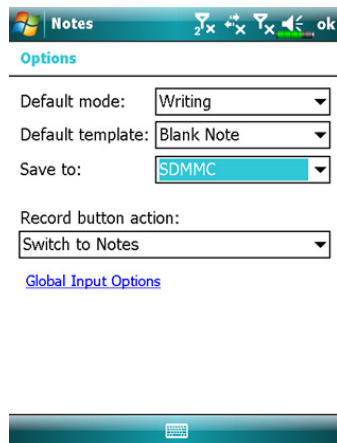

3. Tap the “**Save to**” function

button and select SDMMC from the list. This indicates that you are using your external storage card.


Hereafter, new files will be automatically saved to this storage card.

Follow the same operation procedure for **Notes** in **Word Mobile** and **Excel Mobile**.


In addition, you can use the **Rename/Move** or **Save As** function provided by the program above to move or save files to the storage card.

System Information

Tap  > **Settings** > **System** tab > **System Information**.



Tap  or  to display or hide the system information.

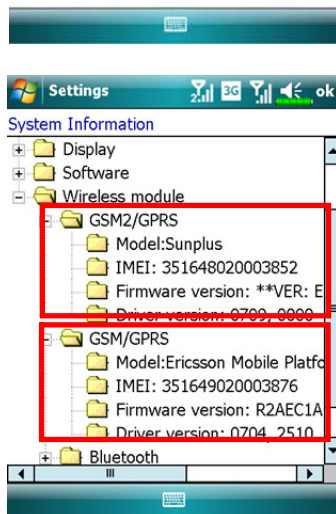

To find detailed information of your SIM cards, tap  in front of “**Wireless module**” to expand the category, and tap the SIM card you desire to look at. If you have installed two SIM cards in the slots, both IMEI numbers of the SIM cards will be shown here.

12-16

13 Voice Commander

Tap  > Programs > Voice Commander.

Voice Commander is continuous voice recognition application software in the Pocket PC. **Voice Commander** allows the user to use their own voice to dial and control functions. **Voice Commander** has the following features:

- Fully voice-controlled system that allows the user to complete operations (such as dialing phone or running applications) quickly without using hands.
- Uses Speaker-Independent (SI) recognition technology that allows the user to use the Pocket PC immediately without having to train or pre-record for the system.
- Provides a Conversational UI for guiding beginners to issue voice commands through the conversational method. The user can then use commands easily without any practice.
- Provides the Voice tag and “digit model adaptation” function so that the user can customize personal settings and further increase recognition and convenience in usage.

The **Voice Commander** provided with this product does not need personal training or recording. You can use voice control to operate this Pocket PC immediately. Try calling out “**Solitaire**” to play. Press the **Voice Commander** button on the side of the Pocket PC and when the system prompts you to “**Say Command,**” just say “**Start Solitaire**” and the **Solitaire** game screen will appear.



Starting Voice Commander

Here are two methods for running **Voice Commander**:

1. Tap  > **Programs** > **Voice Commander** > **Voice Commander**.
2. **Voice Commander** key. The system sets the button on the Pocket PC as the exclusive "Voice Commander" button. Just press this key to run **Voice**.



- ① Show the format of voice command.
- ② Re-Start button: Restart **Voice Commander**.
- ③ Menu button:
Settings: Setup **Voice Commander**.
Help: About **Voice Commander**.
Exit: Exit **Voice Commander**.

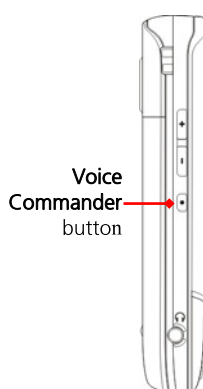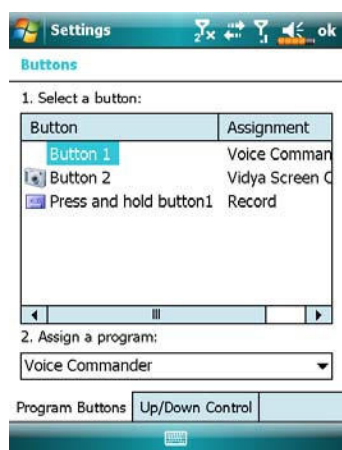

Tap  > **Settings** > **Personal** tab > **Buttons** to redefine the **Voice Commander** hot key or other hardware buttons.

Voice Command Format

Press the **Voice Commander** button on the Pocket PC and enter the **Voice Commander** screen.

- Voice Name dialing
Usage: Call <Contact> at <Home/Work/Mobile>
Example 1: *Call Jennifer Lopez*
Example 2: *Call Jennifer Lopez at mobile*
- Voice Show Contact
Usage: Show <Contact> at <Home/Work/Mobile>
Example 1: *Show Eric Clapton*
Example 2: *Show Eric Clapton at work*
- Voice Digit Dial
Usage: Digit Dial
Example: Digit Dial
(System: What number)
29109088
- Voice Show Appointment
Usage: Today's/Tomorrow's/
This week's Appointment
- Start Application
Usage: Start <Application>
Example: Start Calendar
- Voice Play Music File
Usage: Play <Music file name>
Example 1: Play The Moment
Example 2: Play SHE album
Example 3: Play Music
- Goodbye
Usage: Goodbye

Tips

- All the names in **Contacts** will automatically become recognizable contacts in the "Voice dialing" syntax. However, if the number of contacts exceeds 1000 entries, the system will not recognize the excessive entries. To add these entries to Voice Commander for recognition, tap **Menu > Settings** or run **Voice Commander Settings** to check and add these contacts manually for voice recognition.
- If your volume is too low or if your surroundings are so noisy that the system cannot recognize your voice, the system will prompt you "Please say again." Adjust the distance between yourself and your Pocket PC or reduce the noise and try again.
- If the user has a heavy accent that may cause poor voice recognition, use any of the following methods to train the personal digital adapted model in order to increase recognition:
 1. Tap **Menu > Setting > Digit Training** tab.
 2. Tap **Voice Commander Settings > Digit Training** tab.
- You can also tap **Voice Commander > Menu > Exit** to end **Voice Commander**.
- If you open another program while using **Voice Commander** and it covers the **Voice Commander** screen, **Voice Commander** will terminate automatically.

Voice Commander Settings

There are two ways to run **Voice Commander Settings**:


Tap  > **Programs** > **Voice Commander** > **Voice Commander Settings**.

Tap **Menu** > **Settings** while using **Voice Commander**.

Voice Commander Settings allows the user to personalize the **Voice Commander** settings, add and remove contacts or applications within the recognition range, record voice tags or play commands to prompt the user on how to say the correct command.

Contacts Settings Page

Tap **Voice Commander Settings** and then the **Contacts** tab. The setting page will list all the names and their status (whether or not it is selected, with or without voice tag) in **Contacts**.

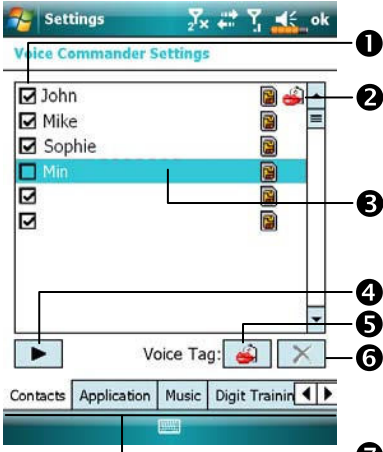

The screenshot shows the 'Voice Commander Settings' window with the 'Contacts' tab selected. It lists contacts: John, Mike, Sophie, and Min. Each contact has a checkbox on the left and a 'Voice Tag' icon on the right. At the bottom, there are tabs for 'Contacts', 'Application', 'Music', and 'Digit Train'. Below the tabs are three buttons: a play button, a red lips icon, and a red X button.

- ① Check box function
- ② If a contact is checked, it can be identified normally. If unchecked, this indicates that it is not within the recognizable range. Please create a voice tag.
- ③ Lips icon: Voice tag is built.
- ④ Tap a contact name to highlight it for using with    buttons.
- ⑤
- ⑥
- ⑦

④  **Play** button: Play the recorded voice tag for this contact and hear how it is pronounced.

⑤  **Build** button: Record the voice tag for this contact again.
During the recording, tap  **Cancel button** to cancel recording.

⑥  **Delete** button: Delete the voice tag for this contact.

⑦ **Contacts** tab: Sets the voice commands for **Contacts**.

Application tab: Sets the voice commands for applications.

Digit Training tab: Sets the voice command for digital dialing.

Advanced Settings tab: Sets the length and sensitivity for digital dialing.

For example, record Alex Cooper in **Contacts** as Sweet Heart.

1. Tap Alex Cooper.
2. Tap  **Build** button.
3. When you hear a beep, say the words “Sweet Heart” that you want to record.
4. When you hear a second beep, say “Sweet Heart” again.
5. After recording twice, the system will play the voice you just recorded to indicate that you have created a voice tag.
6. At this time, a Lips icon  appears to the right of your contact, Alex Cooper, to indicate that there is a voice tag created for this name. This is helpful in identifying which contacts already have voice tags.
7. To create another voice tag, tap  **Build** button and repeat the steps above.
8. Tap  **Delete** button to remove the voice tag. The system will then restore the default voice for Alex Cooper.


Tips

- You can choose which Contacts are to be added to the recognizable range of the Voice Commander. By default, the system automatically adds all names within the recognizable range.
- If the number of **Contacts** exceeds 1000 entries, the system will not recognize the excessive entries. To add these contacts to **Voice Commander** for recognition, manually check the check boxes in front of the contact entries.

Application Settings Page

Tap **Voice Commander Settings > Application** tab and the Settings page will list the applications and settings installed by the Pocket PC on  and then **Programs** (whether or not it is selected, with or without voice tag).

You can choose which applications are to be added to the recognizable range of the **Voice Commander**. By default, the system automatically adds all applications as recognizable targets in the < Application > syntax in "Voice open application." No matter when you install a new application, the system updates immediately and adds the new application within the recognizable range. This helps you save time spent in finding applications.

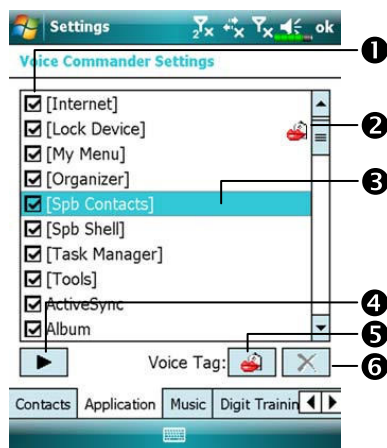

1 Check box function

If the application is checked, it can be identified normally. If unchecked, this indicates that it is not within the recognizable range.

If the check box is gray and cannot be checked, this indicates that the item is unrecognizable. Build a voice tag to add a gray item into the recognizable range.

2 Lips icon: Voice tag is built.

3 Tapped application name is highlighted and can be used with    functions.

- ④  **Play** button: Play the recorded voice tag for this application and hear how it is pronounced.

During the recording, tap

- ⑤  **Build** button: Record the voice tag for this application again.

 **Cancel button** : Tap to cancel recording.

- ⑥  **Delete** button: If there is a Lips icon, the voice tag for this application can be deleted and restored to the default system voice.

Application example: You want to record Windows Live™ Messengers as “Chat room.”

1. Tap Windows Live™ Messengers.
2. Tap  **Build** button.
3. When you hear a beep, say the words “Chat room” that you want to record.
4. When you hear a second beep, say “Chat room” again.
5. After recording twice, the system will play the voice you just recorded to indicate that you have created a voice tag.
6. At this time, a Lips icon  appears to the right of Windows Live™ Messengers to indicate that there is a voice tag created for this application name. This is helpful in identifying which applications already have voice tags.
7. To create another voice tag, tap  **Build** button and repeat the steps above.
8. Tap  **Delete** button to remove the voice tag. The system will then restore the default voice for Windows Live™ Messengers.


Music Settings Page

Tap **Voice Commander Settings** and then the **Music** tab, the settings page will list the music files and configuration status of the specify folder in your Pocket PC or on your storage card.

If you add a new music file, the system will update in real-time, automatically adding the file to your recognizable range, saving you the time of searching for your music files.

The system will automatically activate music files stored in the following folders:

1. All folders on your storage card.
2. The **My Documents** folder in your Pocket PC, or any folder that is inside the **My Documents** folder.
3. If you want to transfer the files to your Pocket PC via the synchronization tools, then you must put the files in either the **Play lists** folder or the **Music** folder.

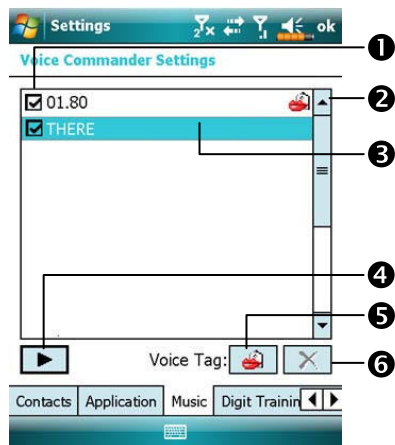

① Check box function

If the music file name is checked, it can be identified normally. If unchecked, this indicates that it is not within the recognizable range.

If the check box is gray and cannot be checked, this indicates that the item is unrecognizable. Build a voice tag to add a gray item into the recognizable range.

②  Lips icon: Voice tag is built.

③ Tapped music file name is highlighted and can be used with   functions.

④  **Play** button: Play the recorded voice tag for this music file name and hear how it is pronounced.

During the recording, tap


⑤  **Build** button: Record the voice tag for this music file name again.

Tap  **Cancel button** to cancel recording.

⑥  **Delete** button: If there is a Lips icon, the voice tag for this music file name can be deleted and restored to the default system voice.

Digit Training Page

Tap **Voice Commander Settings** and then the **Digit Training** tab. This function trains a set of personal voice model to increase accuracy in recognition for users with heavier accents.

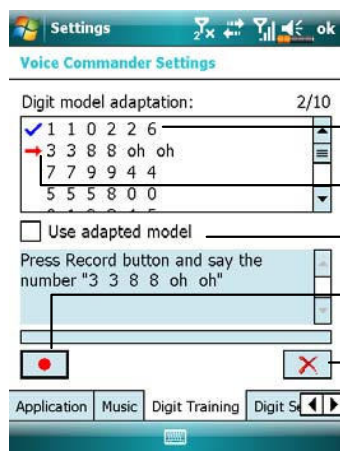

- ① ✓: Voice tag is built.
- ② →: Current digit to be recorded.
- ③ Check "Use adapted model" to use the model tailor made for you with better recognition ability.
- ④ ● Record button: Start recording the assigned digit.
- ⑤ ✕ Remove All button: Delete all voice tags.

There are 10 sets of built-in 6-digit numbers that you have to recite. The steps are as follows:

1. Tap ● **Record** button. When you hear a beep, start reciting the displayed numbers.
2. After reciting, the system plays the numbers you just recited so that you can check if it is correct.
3. If correct, please tap **Yes** and the system prompts you to continue reciting the next set of numbers for recording.
4. If it is necessary to recite these numbers again, tap **No** and then recite again.
5. If you are not satisfied with the sound recorded before, tap ✕ **Remove All** button and the system will delete all recorded sounds. Please record again.
6. After recording 10 sets of numbers, the system will tell you that the voice model is already built.


Tips

- As long as you have completed recording, then you can check **"Use adapted model"** to use the personal model tailored made for you. It is recommended that you recite all 10 sets of numbers so the adaptation effect is more obvious. If you do not want to use the adapted model, then just uncheck **"Use adapted model."**
- If you have trained 10 sets of number as 1 set of voice model, the system will show that all numbers are already recorded when you run this function. If some of the numbers are not yet recorded, the system returns to where it stopped the last time to let you continue with the unfinished portion.
- You can also tap  **Remove All** button and the system will delete the last voice model trained and let you train a new model

Digit Settings Page


The digit setting is for voice recognition. The “**Length of phone number**” setting specifies the maximum number of digits that can be entered as the phone number. These settings will improve recognition accuracy.

- There are three fields in this screen, you can set different lengths in the three fields respectively. The system default settings are 3, 7, and 10, this means that in Digital Dial your system will recognize telephone numbers of 3, 7, and 10 digits in length.
- If you check **No constraint**, the system will not constrain the length of the telephone number that you input, any length of from 1 to 18 digits will be accepted.

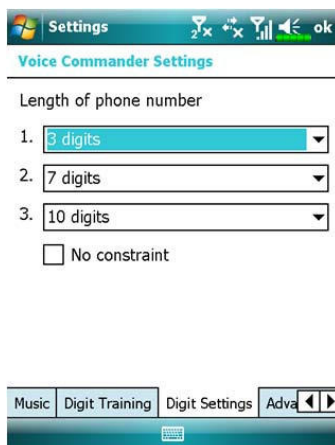

The screenshot shows a mobile application interface for 'Settings'. At the top, there is a status bar with icons for signal, battery, and a 'Settings' title. Below this is a section titled 'Voice Commander Settings'. Underneath, there is a heading 'Length of phone number'. There are three numbered dropdown menus: '1. 3 digits', '2. 7 digits', and '3. 10 digits'. Below these is a checkbox labeled 'No constraint'. At the bottom of the screen, there is a navigation bar with buttons for 'Music', 'Digit Training', 'Digit Settings', and 'Advance' (with left and right arrow icons).

Advanced Settings Page

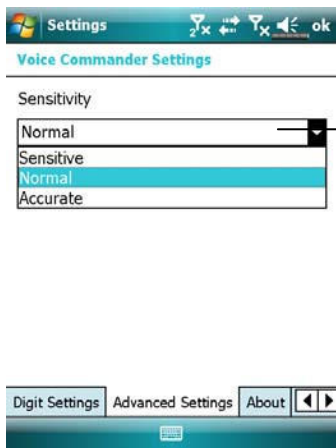

1 Sensitivity: When you use this setting, the voice recognition system is not as strict while performing voice recognition tasks, in other words, under this setting the system will respond to your voice most of the time and you won't have many non-responsive situations. You should set the system to **Sensitive** when in continually noisy environments, for example when on a train or in a factory, etc.

Normal: **Normal** is the default setting and is best for the average environment.

Accurate: Under the **Accurate** setting, the system is more strict when performing voice pattern matching. Recognition errors are less likely to occur when you set the system to **Accurate**.

FAQ

Question: I want to make a call to my friend Andy Miller, but I'm tired of reading manuals. What do I need to know if I just want to make phone calls?

Answer: Make sure you have Andy Miller's name and phone number in the contact database. Press the **Voice Commander** button, and say "Call Andy Miller." The system will guide you through it.

Question: I added a new contact but it is not recognized.

Answer:

1. The system only recognizes English words and characters or digits. Any symbols or marks will be ignored. However you can still make a voice tag for these items.
2. When the number of contacts exceeds 1,000 entries, the system will not recognize the excessive entries, until activated manually by the user.
3. To have a look at the status of the contact's voice command attributes, please go to the **Contacts** setting page in **Voice Commander Settings**.

Question: I recorded a voice tag for my friend last month, but I forgot what I recorded. Do I need to redo the recording?

Answer: No! Just tap Voice Commander Settings, the Contacts tab, select the contact, and then tap  Play button.

Question: I performed digit training today, but I found that the accuracy is worse than before, what do I do now?

Answer: You can retry the digit training again in a “quiet” place. And if it still doesn’t help, disable the adapted model and use the default one. To disable the adapted model, tap **Voice Commander Settings**, the **Digit Training** tab, and then uncheck “Use adapted model.” Or just tap  **Remove All** button to remove the model. It will save you some memory this way.

Question: I accidentally activated **Voice Commander**, how can I abort it?

Answer: Say “Goodbye.”

13-18

14 Specifications

Item	Description
Operating system	Windows Mobile® 6.1 Professional
Processor	Samsung SC3 6400, 533MHz
Memory	256MB ROM, 128 MB RAM
Display	2.8" VGA, 65,536 colors TFT-LCD touch window(640 x 480)
Communication	■ 3.5G HSDPA / UMTS (2100/1900/850 MHz) Quad-Band GSM:850/900/1800/1900 MHz EDGE class 10/GPRS class 10 2.75G GSM/GPRS Tri-Band(900/1800/1900) ■ Wireless LAN 802.11b/g ■ Bluetooth 2.0 class 2 + EDR
GPS	Embedded Chip, SiRF Star III
Camera	■ 3.2M pixels auto-macro with flashlight, up to 2048 x 1536 resolution ■ 0.3M pixels fixed-focus Camera for conference call usage
Light Sensor	Sensing the brightness of environment to adjust panel luminance
Gravity Sensor	Gravity Sensor for user friendly operation
Expansion slot	MicroSD
Interface (Audio)	Built-in microphone and speaker, external stereo headsets jack
Interface (Data)	Mini USB 2.0 Sync

Design and specifications are subject to change without notice.

Item	Description
Interface/Audio	Built-in microphone and speaker External stereo headset jack
Interface/Data	USB Sync
Power supply	Battery: 1530 mAh Li-Ion Polymer, rechargeable, replaceable AC Adapter: 100~240 VAC/50~60 Hz, 5V/1A DC
Environmental temperature	Daily operation: 0°C ~ 40°C; storage: -10°C ~ 50°C
Environmental humidity	45% ~ 85%
Dimensions	106 x 60.5 x 17 mm 147g (including battery)
Optional accessories	Battery, Car charger, Car mount

15 Regulation Notice and Safety Declaration

SAR Information

Your device contains a radio transmitter and receiver, and it is designed, manufactured and tested not to exceed the radio frequency exposure limitations recommended by international guidelines.

The maximum SAR values for DX900 are:

- 0.831 W/kg @10g (GSM 900)
- 0.373 W/kg @10g (GSM1800)
- 0.492 W/kg @10g (WCDMA 2100)
- 0.044 W/kg @10g (WiFi)

Health and Safety Information

Electrical and Battery Safety

- Please use ONLY accessories approved by the manufacturer. Any battery, AC adapter or cable of which authenticity is not verified by authorized service point or dealer (even if similar to original product in appearance or specifications) should not be used with your Pocket PC. The warranty of your Pocket PC DOES NOT apply to damage caused by use with non-manufacturer approved products.
- Follow the specifications of the battery manufacturer: Avoid charging the battery when the environmental temperature is higher than 45°C. Do not store or use the battery when the environmental temperature is higher than 50°C. Otherwise, battery expansion or leakage may occur.
- Do not attempt to disassemble, pound, pierce or damage the battery to avoid causing injury, danger or risk.

Application Environment Safety

- Do not directly expose the Pocket PC to any of the following environments: rapid changes of temperature, high temperature (such as direct exposure to sunlight or stoves), extremely low temperature, high pressure, areas with electrostatic discharge interference or dusty and humid places. Do not soak or wet the Pocket PC with water or any other liquid.
- Do not place the Pocket PC near electrical appliances (such as TVs, computers, scanners, disc players, faxes, hair dryers, etc.) that may generate electrostatic discharge interference.
- Never drop the Pocket PC nor subject it to strong impact.

- Do not use ordinary pen or any object with a sharp tip to tap the Pocket PC cover or screen (LCD panel) to avoid damaging and scratching the surfaces.
- Do not use corrosive or volatile liquids to wipe the Pocket PC. If necessary, use a soft cloth or tissue to wipe the Pocket PC.

Warranty Security

- In case the Pocket PC is damaged, kindly return it to your place of purchase. Do not attempt to disassemble this device on your own as this may void the warranty.
- If any hazards result from the failure of the user to comply with usage rules, we will not be held responsible for any resulting warranty claims.

Data Security

- This company is not responsible for any data loss or damage to the Pocket PC due to improper use. Record important data in your notebook separately or use the USB accessories that come with this product to save important data to your computer or storage card.

Privacy Restrictions

- Some countries require full disclosure of recorded telephone conversations, and stipulate that you must inform the person with whom you are speaking that the conversation is being recorded. Always obey the relevant laws and regulations of your country when using the rewording feature of your Pocket PC Phone.

IMPORTANT SAFETY PRECAUTIONS

- When using this product, the safety precautions below must be taken to offset possible legal liabilities and damages.

Safety in airports, medical facilities, and inflammable environments

When aboard an aircraft, at a medical facility, or at the gas pump where wireless communication devices are prohibited, please launch the **Communication Manager** and then tap the  button. When the color of the icon turns orange , the Flight Mode is activated and the wireless connection of the Pocket PC is disabled.

Safety In Aircrafts

Due to the possible interference caused by this product to an aircraft's navigation system and its communications network, using this product on board an airplane is against the law in most country.

Interference With Medical Equipment Functions

This product may cause medical equipment to malfunction. The use of this device is forbidden in most hospitals and medical clinics.

Environment Restrictions

Do not use this product in gas or refueling stations. The use of this product is also prohibited in fuel storehouse, chemical plants, and locations containing explosives.

Safety For Environments

Do not use this product in gas station, fuel depots, chemical plants or where blasting operations are in progress, or in potentially explosive atmospheres such as fueling areas, below deck on boats, fuel or chemical transfer or storage facilities, and areas where the air contains chemicals or particles, such as grain, dust, or Mattel powders. Please be aware that Sparks in such areas could cause an explosion or fire resulting in badly injury or even death.

Explosive Atmospheres

When in any area with a potentially explosive atmosphere or where flammable materials exist, the product should be turned off and user should obey all signs and instructions. Sparks in such areas could cause an explosion or resulting in bally injury or even death. Users are advised not to use the equipment at refueling points such as service or gas stations. Users are reminded of the need to observe restrictions on the use of radio equipment in fuel depots, chemical plants or where blasting operations are in progress. Areas with a potentially explosive atmosphere are often, but not always, clearly marked. These include fueling areas, below deck on boats, fuel or chemical transfer or storage facilities, and areas where the air contains chemicals or particles, such as grain, dust, or metal powders.

Nonionizing Radiation

This product should be operated in the suggested normal condition only to ensure the radioactive performance and safety of the interference. As with other mobile radio transmitting equipments, user are advised that for satisfactory operation of the equipment and for the safety of personnel, it is recommended that no part of the human body be allowed to come too close to the antenna during operation of the equipment.

Road Safety

Vehicle drivers in motion are not permitted to use telephone service with handheld devices, except in case of emergency. In some countries, using hand-free devices as an alterative is allowed.

Regulatory Notices

Agency identification numbers

For regulatory identification purposes, your product is assigned a model number of DX900.

To ensure continued reliable and safe operation of your Pocket PC, use only the accessories listed in this document.

This product is intended to be charged only from an approved battery charger (rated 5V DC, 1A).

European Union Declaration of Conformity

The CE marking indicated that the product to which it is affixed complies with all the applicable Directives of the European Parliament and Council of the European Union, in particular the Radio & Telecommunications Terminal Equipment (R&TTE) Directive, 1999/5/EC.

Your product conforms to the following European Norms:

- EN 60950-1:2001 (IEC 60950-1 (Modified)) – Information technology equipment – Safety – Part 1: General requirement.
- ETSI EN 301 511 V9.0.2(2003-03) – Mobile communications (GSM); Harmonized standard for mobile stations in the GSM 900 and DCS 1800 bands covering essential requirements under article 3.2 of the R&TTE directive (1999/5/EC).

- ETSI EN 300 328 V1.7.1 – Electromagnetic compatibility and Radio spectrum Matters (ERM); Wide-band transmission systems; Data transmission equipment operating in the 2.4 GHz band and using spread spectrum modulation techniques; Harmonized EN covering essential requirements under article 3.2 of the R&TTE directive.
- ETSI EN 301 489-1 V1.6.1 - Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements.
- ETSI EN 301 489-7 V1.3.1 - Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) for radio equipment and services; Part 7: Specific conditions for mobile and portable radio and ancillary equipment of digital cellular radio telecommunications systems (GSM and DCS).
- ETSI EN 301 489-17 V1.2.1 - Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) for radio equipment and services; Part 17: Specific conditions for 2.4 GHz wideband transmission systems and 5 GHz high performance RLAN equipment.
- EN 55013:2001 – Sound and television broadcast receivers and associated equipment – Radio disturbance characteristics.
- EN 55020:2002 – Sound and television broadcast receivers and associated equipment – Immunity characteristics.
- EN 50371:2002 – Generic standard to demonstrate the compliance of low power electronic and electrical apparatus with the basic restrictions related to human exposure to electromagnetic fields (10 MHz ~ 300 GHz) – General public.

- EN 50360 – 2001 – Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz ~ 3 GHz).

WEEE Notices

The Directive on Waste Electrical and Electronic Equipment (WEEE), which entered into force as European law on 13th February 2003, resulted in a major change in the treatment of electrical equipment at end-of-life.

The purpose of this Directive is, as a first priority, the prevention of WEEE, and in addition, to promote the reuse, recycling and other forms of recovery of such wastes of as to reduce disposal.



The WEEE logo (shown left) on the product or on its box indicates that this product must not be disposed of or dumped with your general household waste. You are liable to dispose of all your electronic or electrical waste equipment by transferring it to a specified collection point for recycling of such hazardous waste. Isolated collection and proper recovery of your electronic and electrical wastes equipment at the time of disposal will allow us to help conserve natural resources. Moreover, proper recycling of the electronic and electrical waste equipment will ensure safety of human health and the environment.

For more information about electronic and electrical waste equipment disposal, recovery, and collection points, please contact your local city center, town or country council, household waste disposal service, shop from where you purchased the equipment or manufacturer of the equipment.

15-10

16 FAQ

1. What features does the Pocket PC have?

Answer:

- ❶ Capability of carrying dual SIM cards.
- ❷ Built-in 802.11b/g wireless networking module.
- ❸ The latest Windows Mobile® 6.1 Professional operating system, with all its settings stored on a Flash ROM. You won't have to worry about losing your data even if the Pocket PC runs completely out of power. The extra-large Flash memory space is capable of storing a large amount of personal data and application programs.

2. How do I configure the wireless network? And how do I connect to the Internet?

Answer: **Communication Manager** will assist you in managing your Bluetooth devices, GSM mobile devices, and your wireless networks.

- ❶ When you purchase credit points for connection to the Internet via a wireless connection, you will be given an IP address, DNS name server address, Proxy server, connection port number, and network key information, you will need this information to successfully connect to the Internet. Sometimes corporate networks may need additional information, please contact your company's network administrator for details. If you are using your wireless network for the first time, please refer to the "Configure your Wireless Network" section and set the necessary configurations.
- ❷ In general, you can activate the wireless connection by tapping the  icon in **Communication Manager**. When your Pocket PC detects and connects to a available wireless network, a  icon will appear on the top of your screen, this means that your Pocket PC has successfully connected with a network hotspot (Access Point). At this time, the indicator on the upper left of your pocket PC will flash amber.

3. My Pocket PC cannot boot. What should I do about it?

Answer:

- ❶ Make sure the Pocket PC battery you use still has enough power.
- ❷ Plug your Pocket PC into the charger, and make sure the red charging indicator lights up. Press the **POWER button**.

4. My Pocket PC has a screen freeze or the system does not respond. What should I do about it?

Answer:

- ❶ You may reset your Pocket PC. It means to re-start the whole system to release unnecessary resources so that the system can return to normal.
- ❷ If you have reset your Pocket PC but it still cannot operate normally, then you need to carry out a cold boot to solve this problem.

To Carry out a cold boot::

Press and hold both **POWER** button and **RESET** button for a while, then release them simultaneously. Wait for a few seconds until the screen wakes up displaying the model name, firmware version and firmware build date of your device, instantly press and hold . Continue pressing  and release it when you see an inquiry box shown on the screen.

If you answer “Yes” to the question displays after a cold boot: (Erase all data and load default?) The programs installed by yourself, self-made settings, and self-made data (e.g., “Contacts” and “Calendar”) will disappear. And return to their default settings.

As a result, we suggest you copy your data to the storage card. Data stored in the storage card will not vanish because of a cold boot. Or you can synchronize the data on your Pocket PC with your desktop computer.

5. Why doesn't my Pocket PC make any sound?

Answer:

- ❶ Tap the speaker icon  on the top right of the screen, then select the volume control options, or adjust the volume of the incoming call sound.
- ❷ Alternatively, you may use the volume control key to control the volume.

6. Why does my Pocket PC screen automatically become dark?

Answer: Tap  > **Settings** > **System** tab > **Backlight** > **Battery power** or the **External power** tab. You may find that if you use battery power, the backlight automatically shuts down after 30 seconds by default; the external power shuts down after 1 minute by default. If you think these times are too short, you may extend them as needed.

7. When I want to open a program or file, a warning message "**Not enough memory**" pops up. What should I do about it?

Answer: Because your Pocket PC's memory is shared by storage memory and program memory, the following methods are available. You may choose the one that works best for you.

- ❶ Remove the programs you installed or that are not frequently used to release program memory space.
- ❷ Delete data that is not used frequently or unnecessary to release storage memory space.

8. The characters on the screen are too small to read. How can I enlarge them?

Answer: Tap  > **Settings** > **System** tab > **Screen** > **Text size** tab. You may adjust the text size as you wish. Also, you may select the landscape orientation in the **General** tab screen. Try and change them so that you can read more smoothly.

9. The contact point of my stylus is not quite precise. What should I do about it?

Answer: Align the screen in place, and the touch screen can respond to the operation of your stylus more precisely. The following two ways will bring you into the touch screen calibration mode.

❶ Tap  > **Settings** > **System** tab > **Screen** > **Align Screen** Button.

❷ Simultaneously press  on the bottom-left of the Pocket PC and the execution button in the center of the navigation pad.

10. The hardware buttons of my Pocket PC doesn't make any response or calls a wrong program. What should I do about it?

Answer: Tap  > **Settings** > **Personal** tab > **Buttons**. Check each button for correct setup.

11. My Pocket PC's Activesync cannot be executed or make a connection. What should I do about it?

Answer:

- ❶ Make sure you have installed Activesync version 4.5 or above. The companion CD contains the software. If you have lost the CD, you may download it from the Microsoft Website.
- ❷ Make sure the charger as well as the USB cable provided along with the product are already connected up to your PC end.
- ❸ Make sure you are not executing another program that uses the same serial port you selected for operation during installation.
- ❹ If your Activesync is still not working, remove and delete the old version of Activesync software at the PC end and install it once again.

12. My PC uses Windows Vista™ operating system, how will it handle the Pocket PC connection?

Answer:

- ❶ Please make sure that the Windows Mobile® Device Center included in the companion CD is installed.
- ❷ Make sure that the included USB cable is properly connected to the PC port.

13. My PC currently has Microsoft Outlook installed; will it work with the Pocket PC?

Answer: Refer to the download link which you can see in the companion CD. If your current Microsoft Outlook version is older than that, uninstall the older version, then install the Microsoft Outlook limited trial version. When the trial period is over, contact with Microsoft for more information on purchasing the retail version.

16-6

17 Index

3

3.5 G video telephony · 4-1

A

About · 2-10
AC Adapter · 1-1
Accounts · 9-1
ActiveSync · 2-7, 6-10
ActiveSync Setup Wizard · 6-7
Adding or Removing Programs · 12-7
Adjust volume · 5-8
Adjust Volume · 5-8
Adjusting Settings · 5-1
Adjusting the Phone Volume · 4-4
Align Screen · 2-1
Answering a call · 4-11

B

Back cover · 1-3
Backlight · 1-15, 2-10, 5-4
Backup Files · 12-2
Backup Utility · 12-1
Battery · 1-1, 1-8, 1-11
Beam · 2-11
Block Recognizer · 2-26
Bluetooth · 2-11, 7-8, 7-9
Browse the Internet · 11-27

Bubble Breaker · 2-7
Built-in camera lens · 1-3
Buttons · 2-9, 5-14

C

Calculator · 2-8
Calendar · 2-7, 11-2
Call History · 4-9
Camcorder · 1-3
Camera · 10-1, 10-3, 14-1
Camera button · 10-3
Camera hot key · 1-3
Certificates · 2-10
Charging · 1-10
Chatting with Contacts · 9-21
Circuit-Switched Data (CSD) · 7-14
Clean Boot · 1-16, 1-19
Clock & Alarms · 2-10
Command Bar · 5-12
Communication · 14-1
Communication Manager · 2-19
Connect GPRS · 7-6
Connection · 3-4
Connection Wizard · 2-11, 7-2
Connections · 2-11, 7-1
Contacts · 2-7, 11-6
Create a Note · 11-14

Index 17-1

Create a Task · 11-11
Create an Appointment · 11-3
Creating a contact · 11-8
Creating a text message · 9-5
Creating an MMS Message · 9-8
CSD Type · 2-11, 7-14

D

Default Settings · 1-16, 1-18
Dimensions · 14-2
Direct Push Technology · 9-16
Disconnect GPRS · 7-7
Display · 1-2, 14-1
Drag · 1-14
Draw on the Screen · 2-30
Dual SIM · 2-21

E

Earphone · 4-2
E-mail · 9-12
E-mails · 9-9
End button · 1-2
End Button · 4-3
Ending a call · 4-12
Enter Information · 2-23
Excel Mobile · 11-18
Expansion slot · 14-1

F

Favorites · 11-28
File Explorer · 2-8, 5-11, 12-12

17-2

Find Information · 5-11
Finding a contact · 11-6
Flashlight LED · 1-3
Flight mode · 2-22
Fully charge the battery · 1-11

G

Getting Started CD · 1-1, 6-2, 6-4
GPRS Connection · 7-3
GPS · 3-2, 14-1
GPS Viewer · 2-7, 3-9

H

Hardware installation, ActiveSync · 6-4
Hardware installation, WMDC · 6-2
Headset connector · 1-2

I

Input · 2-9
Input Panel button · 2-24
Install the external headset · 4-3
Installing ActiveSync · 6-4
Installing the SIM Card · 1-6
Interface/Audio · 14-2
Interface/Data · 14-2
Internet Explorer · 2-8, 11-26, 11-27
Internet Sharing · 2-8, 7-13

L

LED indicator · 1-11
Letter Recognizer · 2-26
Light Sensor · 5-5

Location SMS · 2-7, 3-7

Lock · 2-9

M

Making a call · 4-6

Memory · 2-10, 12-11, 14-1

Menus · 2-9, 12-9

Messaging · 2-7, 9-1

Messenger · 2-8, 9-18

Microphone · 2-10, 4-2, 5-7

MicroSD slot · 1-3

Microsoft® ActiveSync® · 6-3

Microsoft® Internet Explorer Mobile ·
11-26

Microsoft® Pocket Outlook · 11-1

Mini USB connector · 1-2

MMS · 9-7

Mute · 5-8

Mute mode · 4-4

N

Name Cards Management · 10-21

Namecard Manager · 10-18

Navigation Bar · 2-4, 5-12

Navigation button · 1-2

Notes · 2-7, 11-13

Notifications · 5-2

O

Operating system · 14-1

Organize Information · 5-11

Owner Information · 2-9

P

Phone · 2-9, 4-1

Phone Receiver · 1-2, 4-2

Phone Speaker · 1-2, 4-2

Phone1 · 2-21, 2-22

Phone2 · 2-21, 2-22

Pictures & Videos · 2-8

Pocket PC · 1-1

Pop-up menus · 5-13

Power · 1-14, 2-10, 5-3

Power Button · 1-2, 1-13, 1-14, 1-15

Power supply · 14-2

PowerPoint Mobile · 11-21

Preview mirror · 1-3

Processor · 14-1

Programs · 2-7

R

Record a Message · 2-31

Redefine Hot Keys · 5-14

Regional Settings · 2-10

Remove Programs · 2-10, 12-10

Reset · 1-16, 1-17

Reset button · 1-3

Reset Button · 1-17

Restore Files · 12-5

S

Satellite Data Update · 2-7, 3-4

Satellite Navigation · 3-1
Scenarios · 5-10
Screen · 2-1, 2-10
Search · 2-8, 5-11, 12-12
Select a Drawing · 2-31
Select Writing · 2-29
Send button · 1-2
Send Button · 4-3
SIM card · 1-6
SIM Manager · 4-17
SIM Tool Kit · 4-19
SIM1 · 2-21
SIM2 · 2-21
Sleep mode · 1-14
SMS · 9-3
SMS Sender · 4-20
Soft Keyboard · 2-26
Software installation, WMDC · 6-2
Solitaire · 2-7
Sounds & Notifications · 2-9
Spb Mobile Shell · 2-12
Speaker · 1-3, 2-3
Speed Dial · 4-21
Start · 2-3
Start a chat · 9-20
Start Menu · 12-9
Storage Space · 12-1
Streaming Player · 11-24
Stylus · 1-1

17-4

Stylus holder · 1-3
Synchronizing E-mail · 9-10
System Information · 2-10, 12-15

T

Tap · 1-14
Tap and hold · 1-14
Tasks · 2-7, 11-10
Text Message · 9-3
Today · 2-9
Today screen · 2-3
Touch screen · 1-2
Touch the screen · 1-14
Transcriber · 2-27
Turn off Phone · 7-7
Turn on Phone · 7-5

U

USB Cable · 1-1
USB Synchronization · 6-7
USB to PC · 2-11, 6-6
Using the stylus · 1-14

V

Vibrate · 5-8
Vibration mode · 4-4
Video Call · 4-13
Video conference camera · 1-2
Voice Command Format · 13-3
Voice Commander · 2-7, 2-33, 13-1,
13-2

Voice Commander Button · 2-33
Voice Commander hot key · 13-2
Voice Commander Settings · 2-7, 13-5
Volume control key · 1-2

W

Windows Live · 2-8
Windows Live™ Messenger · 9-18

Windows Media · 2-8, 11-22
Windows Media Player · 11-22
Windows Mobile® Device Center · 6-1
Wireless LAN · 7-15, 8-1
Word Mobile · 11-15
Write on the Screen · 2-28

First Version: January 2009
Current Version: April 2009, Version 2
Number: 20090331