



User Guide



Some of the contents in this manual may differ from your phone depending on the software of the phone or your service provider.

© 2008 AT&T Knowledge Ventures. All rights reserved. Subsidiaries and affiliates of AT&T Inc. provide products and services under the AT&T brand.

CU915

Copyright©2008 LG Electronics, Inc. ALL RIGHTS RESERVED.

All materials used herein, including but not limited to trademarks, service marks, and all other commercially valuable rights, properties and products are owned by and proprietary to LG Electronics, Inc. and may not be reproduced, republished, redistributed or disseminated, either in whole or in part, without the express written permission of LG Electronics, Inc.

All other marks are proprietary to their respective owners. Features and specifications are subject to change without prior notice.

LIMITED WARRANTY STATEMENT

1. WHAT THIS WARRANTY COVERS :

LG offers you a limited warranty that the enclosed subscriber unit and its enclosed accessories will be free from defects in material and workmanship, according to the following terms and conditions:

1. The limited warranty for the product extends for TWELVE (12) MONTHS beginning on the date of purchase of the product with valid proof of purchase, or absent valid proof of purchase, FIFTEEN (15) MONTHS from date of manufacture as determined by the unit's manufacture date code.
2. The limited warranty extends only to the original purchaser of the product and is not assignable or transferable to any subsequent purchaser/end user.
3. This warranty is good only to the original purchaser of the product during the warranty period as long as it is in the U.S, including Alaska, Hawaii, U.S. Territories and Canada.
4. The external housing and cosmetic parts shall be free of defects at the time of shipment and, therefore, shall not be covered under these limited warranty terms.
5. Upon request from LG, the consumer must provide information to reasonably prove the date of purchase.
6. The customer shall bear the cost of shipping the product to the Customer Service Department of LG. LG shall bear the cost of shipping the product back to the consumer after the completion of service under this limited warranty.

2. WHAT THIS WARRANTY DOES NOT COVER :

1. Defects or damages resulting from use of the product in other than its normal and customary manner.
2. Defects or damages from abnormal use, abnormal conditions, improper storage, exposure to moisture or dampness, unauthorized modifications, unauthorized connections, unauthorized repair, misuse, neglect, abuse, accident, alteration, improper installation, or other acts which are not the fault of LG, including damage caused by shipping, blown fuses, spills of food or liquid.
3. Breakage or damage to antennas unless caused directly by defects in material or workmanship.
4. That the Customer Service Department at LG was not notified by consumer of the alleged defect or malfunction of the product during the applicable limited warranty period.
5. Products which have had the serial number removed or made illegible.
6. This limited warranty is in lieu of all other warranties, express or implied either in fact or by operations of law, statutory or otherwise, including, but not limited to any implied warranty of marketability or fitness for a particular use.
7. Damage resulting from use of non-LG approved accessories.
8. All plastic surfaces and all other externally exposed parts that are scratched or damaged due to normal customer use.
9. Products operated outside published maximum ratings.
10. Products used or obtained in a rental program.
11. Consumables (such as fuses).

3. WHAT LG WILL DO:

LG will, at its sole option, either repair, replace or refund the purchase price of any unit that does not conform to this limited warranty. LG may choose at its option to use functionally equivalent reconditioned, refurbished or new units or parts or any units. In addition, LG will not re-install or back-up any data, applications or software that you have added to your phone. It is therefore recommended that you back-up any such data or information prior to sending the unit to LG to avoid the permanent loss of such information.

4. STATE LAW RIGHTS :

No other express warranty is applicable to this product. THE DURATION OF ANY IMPLIED WARRANTIES, INCLUDING THE IMPLIED WARRANTY OF MARKETABILITY, IS LIMITED TO THE DURATION OF THE EXPRESS WARRANTY HEREIN. LG INFO-COMM INC. SHALL NOT BE LIABLE FOR THE LOSS OF THE USE OF THE PRODUCT, INCONVENIENCE, LOSS OR ANY OTHER DAMAGES, DIRECT OR CONSEQUENTIAL, ARISING OUT OF THE USE OF, OR INABILITY TO USE, THIS PRODUCT OR FOR ANY BREACH OF ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING THE IMPLIED WARRANTY OF MARKETABILITY APPLICABLE TO THIS PRODUCT.

Some states do not allow the exclusive of limitation of incidental or consequential damages or limitations on how long an implied warranty lasts; so these limitations or exclusions may not apply to you. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

5. HOW TO GET WARRANTY SERVICE :

To obtain warranty service, please call or fax to the following telephone numbers from anywhere in the continental United States:

Tel. 1-800-793-8896 or Fax. 1-800-448-4026

Or visit www.lgeservice.com. Correspondence may also be mailed to:

LG Electronics MobileComm U.S.A., Inc.

201 James Record Road Huntsville, AL 35824

DO NOT RETURN YOUR PRODUCT TO THE ABOVE

ADDRESS. Please call or write for the location of the LG authorized service center nearest you and for the procedures for obtaining warranty claims.



User Guide

Table of Contents



Your Phone	8
Part of the phone.....	8
Rear view.....	9
Getting Started	10
Installing the SmartChip.....	10
Charging the Battery	12
Turning Your Phone On and Off	13
Access Codes.....	13
Cautions for touch keys	14
Display Information.....	15
Selecting Functions and Options	19
General Functions	21
Making a Call.....	21
Adjusting the Volume	22
Answering a Call.....	22
Entering Text	23
In-Call Menu	26
During a Call	26
Video Share Call	27
Conference Calls	32
Menu Tree	34



Call Menu.....	37
Dial	38
Address Book	39
Contact List	39
New Contact	39
Favorites	39
Caller Groups	39
Speed Dial List.....	39
Copy All Contacts	40
Delete All Contacts	40
Service Dial Numbers.....	40
My Business Card	40
View Options.....	40
My Numbers.....	40
Recent Calls	41
Missed Calls	41
Dialed Calls	41
Received Calls.....	41
All Calls.....	41
Call Duration.....	41
Data Counter	42
Messaging.....	42
New Message	42
Inbox.....	44
Drafts.....	45
Outbox.....	45
Sent.....	46
Voicemail.....	46
Templates.....	47
Message Settings.....	48



IM	49
Mobile Email	53
Multimedia Menu	55
Cellular Video (CV)	56
MEdia Net	56
MEdia Net Home.....	57
Bookmarks.....	57
Saved Pages.....	57
Enter URL.....	57
Recent Pages	58
Security	58
Browser Settings	58
AT&T Mall	61
Shop Tones	61
Shop Games.....	61
Shop Graphics	61
Shop Multimedia	61
Shop Applications	61
Shop Videos.....	62
AT&T Music	62
Music Player	62
Shop Music	68
MusicID	69
XM Radio.....	69
Music Videos.....	70
The Buzz	70
Community	70
Music Apps.....	70



Camera	70
Take Picture.....	71
After you've taken your photo	72
Record Video.....	73
Games	75
Applications	75
My Stuff Menu	77
Alarm Clock	78
Audio & Ringtones	78
Pictures	79
Videos	79
Calculator	80
Calendar	80
Tools.....	80
Voice Command.....	80
Notepad.....	82
Tip Calculator.....	82
World Clock	82
Tasks.....	82
Stopwatch.....	83
Unit Converter	83
More	84
Other Files.....	84
Memory Card	84
Settings Menu	85
Call	86
Call Forwarding.....	86
Send My Number	86
Auto Redial.....	86




Answer Mode.....	87
Minute Minder	87
Call Waiting.....	87
Call Reject	87
TTY	88
Send DTMF Tones.....	89
Video Share	89
Sound	90
Shop Ringtones	90
Ringtones	90
Volume	90
Message Alert Tones	90
Alert Type.....	91
Increasing Ringtone	91
Power On/Off Tones	91
Display	91
Wallpapers.....	91
Backlight Timer	91
ShortCut Menu.....	92
Brightness	92
Languages.....	92
Dialing Fonts.....	92
Clocks & Calendar.....	92
Themes.....	92
Touch Settings	92
Date&Time.....	93
Date	93
Time	93
Auto Update.....	93
Bluetooth	93
Turn On.....	94



Search New Device.....	94
Paired Devices.....	94
Settings.....	95
Quick Tips.....	95
More	95
Security.....	95
Connection	97
Flight Mode.....	97
Start Up Guide	98
Touch Calibration	98
Software Update	98
Check Memory.....	98
Handset Information	99
Reset Settings.....	99
 Q&A	 100
Accessories	102
For Your Safety	104
Safety Guidelines	108
Glossary	126
Index	128

Your Phone

Part of the phone

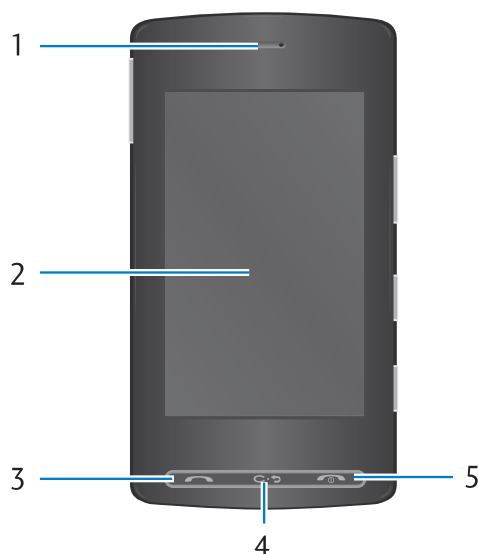

1. EARPIECE

2. MAIN LCD

3. SEND KEY


- Dials a phone number and answers incoming calls.

4. CLEAR KEY

- Deletes a character with each press.
- Uses this key to go back to a previous screen.

5. END/POWER KEY

- Ends or rejects a call.
- Turns the phone on/off.

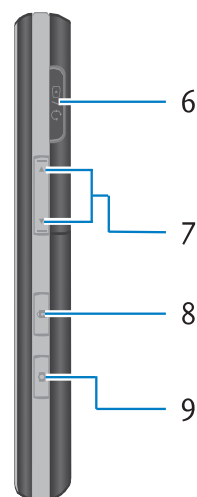

6. CHARGER/CABLE/HANDSFREE CONNECTOR

7. SIDE KEYS


- **When the screen is idle:** Volume of key tone
- **In menu:** scroll up & down
- **During a call:** volume of the ear-piece lock.

8. KEYPAD LOCK/UNLOCK KEY

9. CAMERA KEY


- Press and hold this key to activate camera.

Rear view

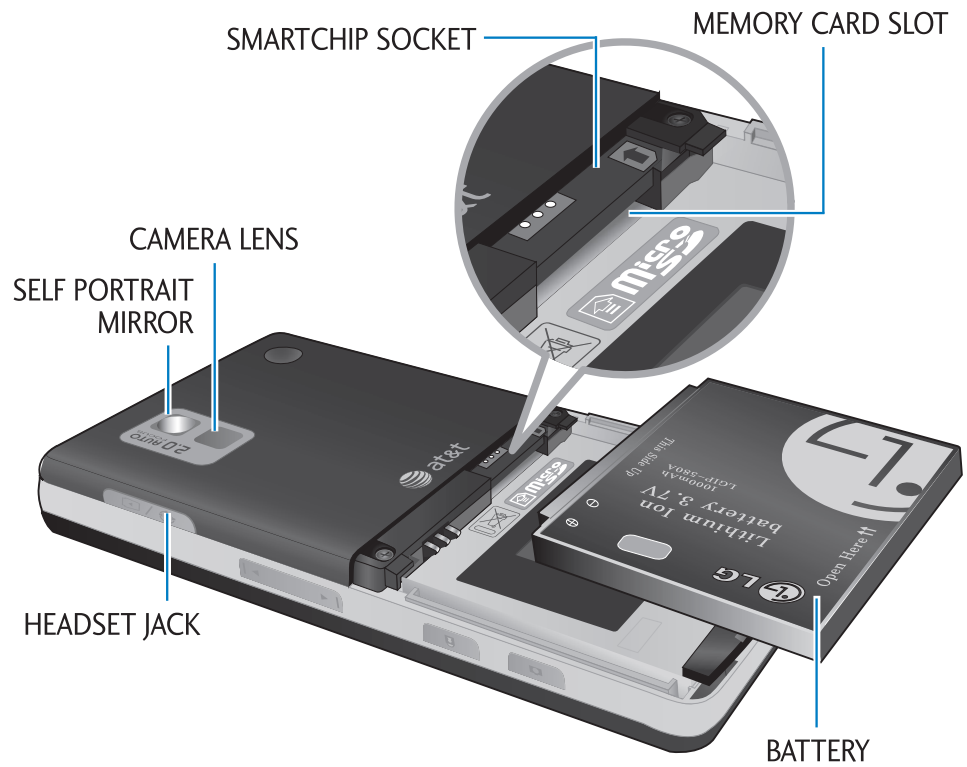

Advice to the customer

In order to allow better antenna sensitivity LG suggest that you hold the handset as depicted in the figure below.

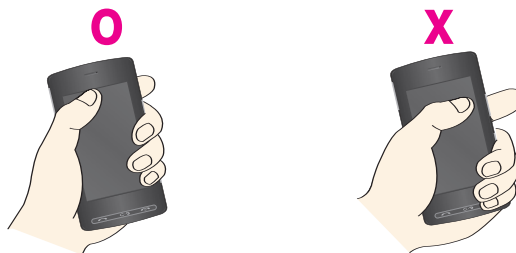

please do not cover the antenna area with your hand during a call and using a bluetooth connection. It may degrade speech quality.

Getting Started

Installing the SmartChip

When you subscribe to a cellular network, you are provided with a plug-in SmartChip loaded with your subscription details, such as your PIN, any optional services available and many others.

❗ Important!

The plug-in SmartChip and its contacts can be easily damaged by scratches or bending, so be careful when handling, inserting or removing the card. Keep all SmartChips out of the small children's reach.

1. Remove the battery cover.

Turn the phone up-side down, as shown, then press down the battery lightly with your fingers and pull-out the battery.




2. Remove the battery.

Hold the top edge of the battery and lift the battery from the battery compartment.




3. Slide the SmartChip into the SmartChip socket. Make sure that the SmartChip is inserted properly and that the gold contact area on the card is facing downwards. To remove the SmartChip, press down lightly and pull it in the reverse direction.



Note

When you need to remove the SmartChip, slide it, as shown, and take it out of the socket.



4. To insert the battery, align the golden contacts of the battery with the corresponding connectors on the battery compartment. Press down on the opposite end of the battery until it snaps into place.




5. Attach back cover by sliding it up into position until it clicks.

Charging the Battery

Use of unauthorized accessories could damage your phone and void your warranty.

To use the travel charger provided with your phone:

1. With the battery in position in the phone, connect the lead from the travel charger to the bottom of the phone. Check that the arrow on the lead connector is facing towards the front of the phone.
2. Connect the travel charger to a standard AC wall outlet. Only use the travel charger that comes with the package.

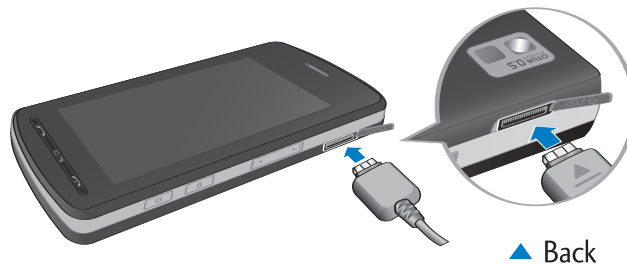


! Warning

The travel charger must be unplugged before you remove the battery, otherwise, the phone could be damaged.

3. When a phone has been charged fully, disconnect the travel charger from the phone by pulling the connector out.

! Note

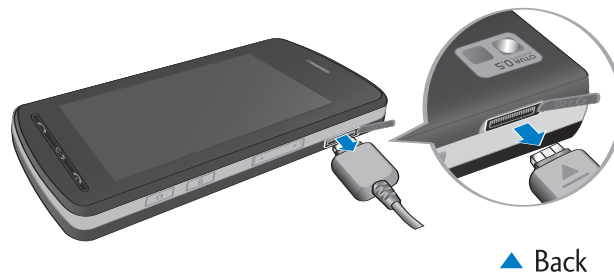

- ▶ If your phone is powered on while charging, you'll see the bars on the battery indicator icon cycle.
- ▶ While a phone is being charged, 'Charging' message is shown in the idle screen.



- ▶ When it is completed, 'Charge complete' message is displayed in the same place.
If a user cannot see the 'Charge complete' message, even if battery icons are show 3 blocks, it means the phone is not charged fully yet.

If the battery fails to charge completely:

- ▶ After turning the phone on and off, please attempt to recharge the battery.
- ▶ After detaching and reattaching the battery, please attempt to recharge the battery.

Turning Your Phone On and Off

1. Hold down the  [END] key until the phone switches on.
2. If the phone asks for a PIN, enter the PIN and tap the [OK] key.

! Note

The display language is preset to Automatic at the factory. To change the language, use the Languages menu, which is located [Setting menu - Display-Languages]

3. When you wish to switch the phone off, hold down the  [END] key until the power-off image displays.

Access Codes

You can use the access codes described in this section to avoid unauthorized use of your phone. The access codes can be changed by using the **Change Codes** feature.

Security code (4 digits)

The security code protects the unauthorized use of your phone. The default security code is set to '0000' and the security code is required to delete all phone entries and to activate the Restore Factory Settings menu. The security code default setting can be modified from the Security Settings menu.

Cautions for touch keys

1. Make sure your hands are clean and dry.



2. You do not need to press hard on the touch keys to make them work. Do not subject the product to severe impact, as this may damage the touch key sensors.
3. Use the tip of your finger to press exactly on the touch key you want, being careful not to touch the keys for other functions.
4. When both the home screen and touch key lights are off, pressing a touch key will not turn on the home screen light. Press , then home screen light will turn back on. (Touch keys do not work when the touch key lights are off.)
5. Touch keys may not work normally if a mobile phone case or plastic cover is covering them. Also, touch keys may not work if you are wearing gloves.
6. Keep metal and other conductive materials away from the surface of the touch keys, as contact with them may result in an error.
7. This phone does not allow to use a pen or a stylus to select menu. If you use a pen or a stylus, the menus cannot be activated properly. Use the phone by only finger.
8. Touch key cannot be activated properly in humid place.

Display Information





The quick keys

The quick keys provide easy, one-touch access to your most used functions.

-  Tap to open the full menu which is separated into four sub-menus. Tap each sub-menu's vertical bar to view further options.
-  Tap to open the menu concerning ATT service, Camera and Games.
-  Tap to open your address book. Alphabetical tabs run vertically along the left side of the screen so you can easily find the contact you're looking for. You can also create new contacts and edit existing ones. See page 39 for details.
-  Tap to bring up the touch dialling pad to make a call. Input the number as you would using a normal key pad and tap [Call] or press the  key.

Changing your profile from the status bar


Tap the icon that represents your current profile setting in the status bar. Select a profile type, for example Silent, and tap OK to save and close.



On-Screen Icons

The table below describes various display indicators or icons that appear on the phone's display screen.


ICON/INDICATOR	DESCRIPTION
	Tells you the strength of the network signal.
	Indicates that you are using GPRS.
	Indicates that you are using EDGE service.
	Indicates that you are out of network coverage or very weak signal.
	Shows that you are using a roaming service.
	The alarm has been set and is on.
 	Tells you the status of the battery.
	Indicates that you have received a text message.
	Indicates that you have received a voice message.
	Vibrate only menu in profile.
	General menu in profile.
	Outdoor menu in profile.
	Silent menu in profile.
	Indicates that you have diverted a call.
	Indicates activation of the Multitasking function.

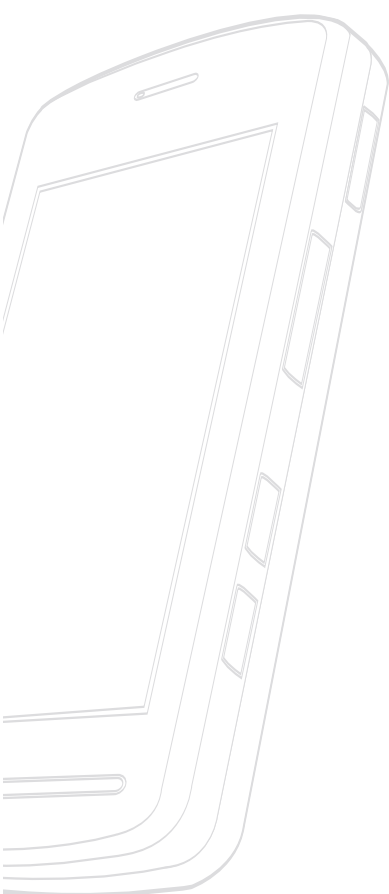

ICON/INDICATOR	DESCRIPTION
	Indicates that the phone is accessing WAP.
	Indicates that you have activated flight mode.
	Indicates that you have activated Bluetooth.


Selecting Functions and Options

The touch screen consists of the menus as follow:

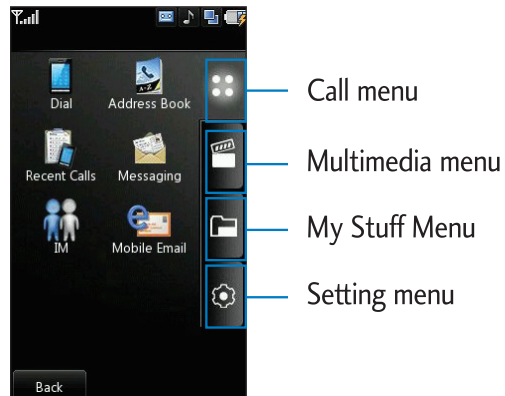

If there is a bar on the right side of menu, you can press and hold a menu and scroll up/down in order to see hidden menus.


Example

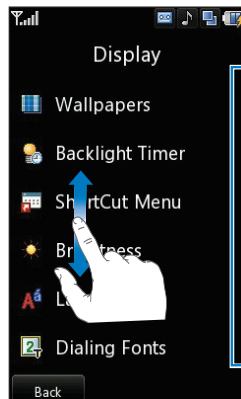

Bar

If there is no bar on the right side of menu, that means there is no hidden menu (all of menus will be shown in a screen)

Example

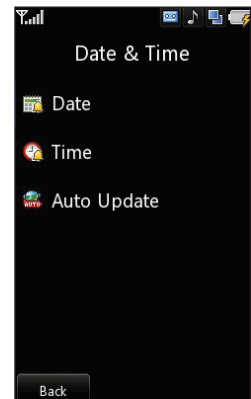

General Functions

Making a Call

1. Make sure your phone is powered on.
2. Tap [] in the idle screen and enter a phone number including the area code by tapping the keypad. To edit a number on the display screen, simply tap the  key to erase one digit at a time.
 - ▶ Press and hold the  key to erase the entire number.
3. Press the  [SEND] key to call the number.
4. When finished, press the  [END] key.

Making a Call by Send Key


1. Press the  [SEND] key, and the most recent Received, Dialed and missed phone numbers will be displayed.
2. Select the desired number you'd like to call by tapping or scrolling up and down.
3. Press the  [SEND] key.

Making International Calls

1. Tap the [ *] key twice in the keypad and the international access character ' + ' will appear.
2. Enter the country code, area code, and the phone number.
3. Press the  [SEND] key.

Ending a Call

When you have finished a call, press the  [END] key.

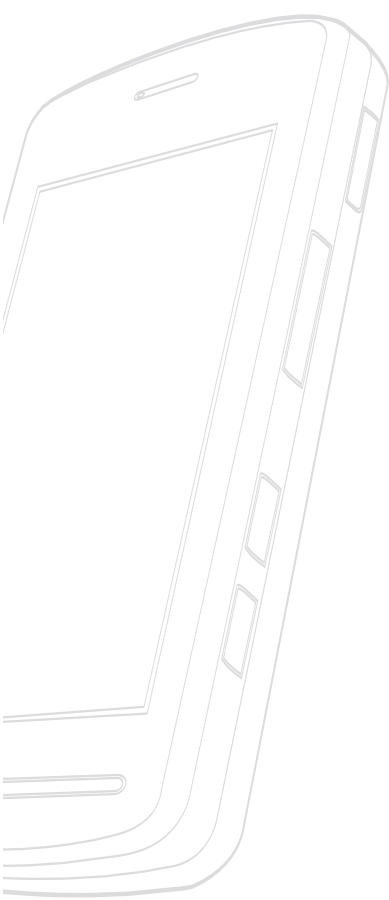



Making a Call From the Contacts

You can store names and phone numbers dialed frequently in the SmartChip as well as in the phone memory known as the Contacts.

Tap [] and search for the desired numbers by selecting name in the contacts and pressing the  [SEND] key.

Adjusting the Volume

During a call, if you want to adjust the earpiece volume, use the side keys of the phone.

In idle mode, you can adjust the ring volume using the side keys.

Answering a Call

When you receive a call, the phone rings and the flashing phone icon appears on the screen. If the caller can be identified, the caller's phone number (or name if stored in your Address Book) is displayed.

1. Press the  [SEND] key. If Any Key has been set as the answer mode([Setting menu-Call-Answer Mode]), any key press will answer a call except for the  key.
2. End the call by pressing the  [END] key.

Note

You can answer a call while using the Address Book or other menu features.

Signal Strength

If you are inside a building, being near a window may give you better reception. You can see the strength of your signal by the signal indicator on your phone's display screen.

Entering Text

You can enter alphanumeric characters by using the phone's keypad. For example, storing names in the Address Book, writing a message, or creating scheduling events in the calendar all require entering text.


The following text input methods are available on the phone.

You can change the text input mode by tapping [Options]-[Text Entry Mode]. You can choose Qwerty Keypad, ABC mode, T9 ABC mode and 123 (Numbers) mode.

You can check the current text input mode in the upper right corner of the screen.

Qwerty Keypad

In this mode, the screen flips to landscape and a full qwerty keyboard appears on screen. Simply tap each letter to write your message.

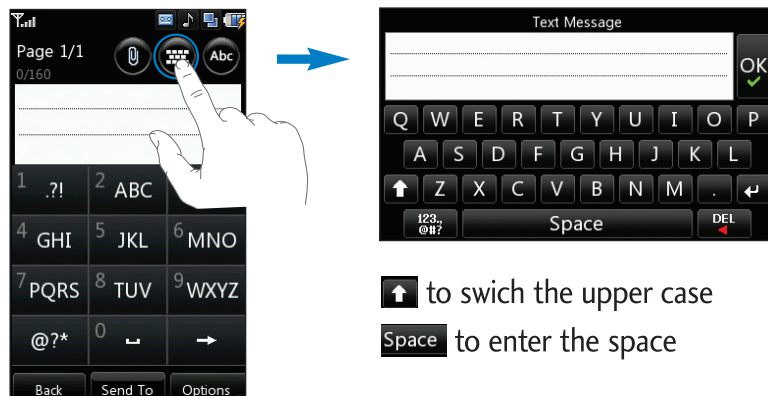

T9 Mode

This mode allows you to enter words with only one keystroke per letter. Each key on the keypad has more than one letter. The T9 mode automatically compares your keystrokes with an internal linguistic dictionary to determine the correct word, thus requiring far fewer keystrokes than the traditional ABC mode.

The T9 predictive text input mode allows you to enter words easily with a minimum number of key presses. As you tap each key, the phone begins to display the characters that it thinks you are typing based on a built-in dictionary. As



new letters are added, the word changes to reflect the most likely candidate from the dictionary.

Use the Touch keypad keys to enter your text.

1. When you are in the T9 predictive text input mode, start entering a word by tapping keys **2_{abc}** to **9_{WXYZ}**. Press one key per letter.
 - ▶ The word changes as letters are typed - ignore what's on the screen until the word is typed completely.
 - ▶ If the word is still incorrect after typing completely, press the **C↵** once or more to cycle through the other word options.
 - ▶ If the desired word is missing from the word choices list, add it by changing [Options]-[Text Entry Settings]-[T9 Dictionary].
2. Enter the whole word before editing or deleting any keystrokes.
3. Complete each word with a space by tapping the icon **␣**.

To delete letters, press **C↵**. Press and hold down **C↵** to erase the letters continuously.

ABC Mode

This mode allows you to enter letters by tapping the key labeled with the required letter once, twice, three or four times until the letter is displayed.

Use the Touch keypad keys to enter your text.

1. Tap the key labeled with the required letter:
 - ▶ Once for the first letter
 - ▶ Twice for the second letter
 - ▶ And so on
2. To insert a space, tap the **␣** key. To delete letters, press the **C↵** key. Press and hold down the **C↵** key to erase the letters continuously.



123 Mode (Numbers Mode)

Type numbers using one keystroke per number. To change to 123 mode in a text entry field, tap [Options]-[Text Entry Mode]-[123].

Note

You can select a different T9 language from the menu option. The default setting on the phone is T9 disabled mode.

The 123 Mode enables you to enter numbers in a text message (a telephone number, for example) more quickly.

T9 dictionary

To use T9 dictionary, tap [Options]-[Text Entry Settings]-[T9 Dictionary].

The T9 dictionary is a feature that allows the user to add any unique or personal words to the T9 standard language database. Within the T9 dictionary function, the user can add, modify, delete or reset personal words.

In-Call Menu

Your phone provides a number of control functions that you can use during a call.

During a Call

The menu displayed on the handset screen during a call is different from the default main menu displayed when in idle screen, and the options are described below.

Swapping Between Two Calls

To switch between two calls, tap the [SEND] key, and then select Swap.

Answering an Incoming Call

To answer an incoming call when the handset is ringing, simply press the  [SEND] key. The handset is also able to warn you of an incoming call while you are already on a call. A tone sounds in the earpiece, and the display will show that a second call is waiting. This feature, known as **Call Waiting**, is only available if your network supports it.

If Call Waiting is on, you can put the first call on hold and answer the second call, by pressing the  [SEND] key.

Rejecting an Incoming Call

You can reject an incoming call without answering by simply pressing the  [END] key.

During a call, you can reject an incoming call by pressing the  [END] key.

Muting the Microphone

You can mute the microphone during a call by tapping the left [Mute] key. The handset can be unmuted by tapping the left [Unmute] key. When the handset is muted, the caller cannot hear you, but you can still hear the caller.





Using the Speakerphone

You can use the speakerphone during a call by tapping [speakerphone] key located in the middle of the screen next to Mute. The loudspeaker is automatically deactivated when you end the call.

! Warning

Due to higher volume levels, don't place the phone near your ear while the speakerphone is enabled.

Video Share Call

Making and Answering a Video Share Call

You can make and answer a Video Share Call with other Video Share phones. The other party must have a 3G Video-Share capable phone and be in a 3G coverage area.

! Note



Before you start a Video Share Call you must check the following:

- Phone must be in a AT&T 3G service area.(You can see the  on the left hand of the icon bar on the screen.)
- Phone needs the presence of 'GLOBE' (You can see the  on the left hand of the icon bar on the screen.)
- Provisioned with Video Share service.
- The service should be defaulted to on.

To use Video Share follow these steps:

1. Make a phone call by dialing the number, selecting the number from your contact list or selecting the number from the list of calls you have made or received.

2. Once the connection has been established, after a few seconds the 'Video Share Ready' prompt will be displayed on the screen provided the other party is also Video Share enabled and in a 3G coverage area. Then, you are ready to begin sharing your video with the other party (or have video shared with you). If you set Initial Notification to On from the Video Share(default is set OFF), a notification pop-up window will be displayed. Tap [Accept] and you will be connected directly to live Video Share.

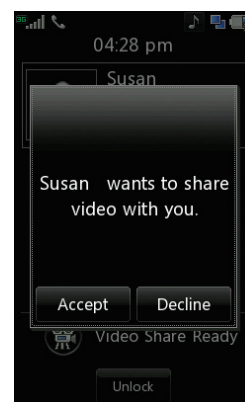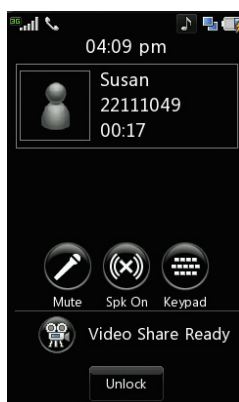

3. To send video to the other party, simply tap Video Share Ready icon  on the screen or the camera button on the side.


An other way to share video is to select 'Options' → 'Video Share' and choose sharing type.

- **Live:** You can share a real-time video stream with the other party while having a conversation.
- **Recorded:** You can share a pre-recorded video clip with the other party while having a conversation. (Note that you can share video files recorded in Video Share mode or in Video Share Call.)

Note

The Speakerphone will be automatically activated when a Video Share session begins, unless a hands-free device (Bluetooth or stereo headset) is connected.

4. If the other party accepts your request, a video share session begins. (It can take a few seconds for the other party to accept your invitation and start the Video Share Call.)

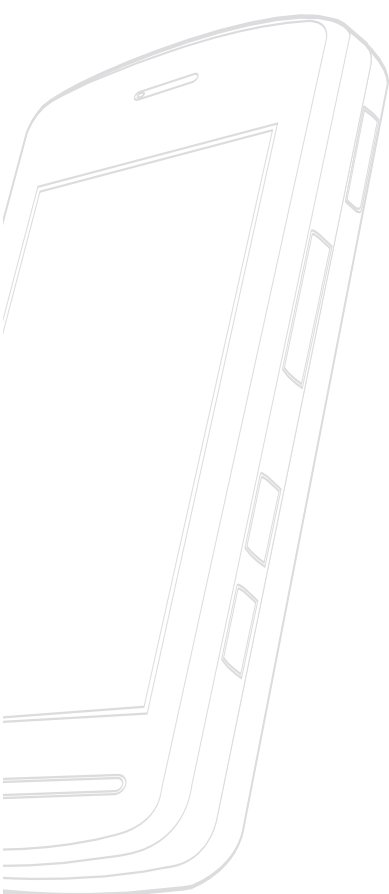

During the Video Share session with the other party, you can select a menu item by tapping [Options] key.

-  **Stop:** stops video sharing and proceeds with voice call only.
-  **Brightness:** adjusts the brightness of the screen.
-  **Mute/Unmute:** mute/unmute the microphone.
-  **Spk. Off/Spk. On:** when Spk. On is selected, you can have a conversation using the speakerphone. When Spk Off is selected, you can have a conversation using the headset.
-  **Zoom in/out:** Zoom in/out the video. (This feature only can be set by the caller.)

You can record a current video clip via Options menu, and the recorded video will be saved in [My stuff] – [Video].

5. Select the STOP menu item to stop sending video, or press the End key [End Call] to finish the call, or turn off the handset.

Note

1. The Video Share Call will be terminated in the following cases:

- When adding a 3rd party or Conference Call or a 2nd incoming call is accepted during a Video Share call.
- When the voice call is placed on hold.
- When the voice call is disconnected.



- When moving out of a AT&T 3G service area.
- When the network connection is poor.
- 2. The Video Share Call will be unavailable in the following cases (“Video Share Ready” message will be greyed out).
 - When trying to make a conference call/second call during a call.
 - When the voice call is placed on hold.
 - When moving out of a AT&T 3G service area.

“To receive a Video Share session:”

1. If you receive a Video Share request during a call, tap [Accept] to accept the request. If you don’t want to accept the request, tap [Decline]. When you’re a recipient of a Video Share session, the following menu items are available:



-  **Stop:** stops video sharing and proceeds with voice call only.
-  **Mute/Unmute:** mute/unmute the microphone.
-  **Spk. Off/Spk. On:** when Spk. On is selected, you can have a conversation using the speakerphone. When Spk. Off is selected, you can have a conversation using the headset. using a headset when the voice call is placed on hold.
-  **Landscape:** displays the incoming video stream in landscape mode.



Note

- The speakerphone will be automatically turned on when a Video Share Call begins, and automatically back to the previous mode when a Video Share Call ends. The exception is when a Hands-free device (Bluetooth or stereo headset) is being used.
- If a Hands-free device (Bluetooth or stereo headset) is connected, then the speakerphone menu will be deactivated.

Making a Video Share Call in Camera & Recording mode

When you are in Camera & Recording mode, you can easily make a Video Share Call to a person in your Contact List.

1. Tap the second icon on the right part of the screen. (This icon is activated only in 3G coverage. If it is not available, you will not be able to select this icon)
2. This screen provides you with three options to make a Video Share Call:
 - a. Enter a number directly.
 - b. Select a number from the list of recent video sharers (last five numbers).
 - c. Select a number from the contact list.

Note

- If the other party is not available for a Video Share Call, then the call will remain as a normal voice call.

Saving your Video Share

Sender can record video clip during the Video Share session. There will be a prompt asking if you would like to save or discard the video at the end of a recording session. If you choose to save the video, it will be saved in the "My Stuff," folder in your phone.



Conference Calls

The conference service provides you with the ability to have a simultaneous conversation with more than one caller. The conference call feature can be used only if AT&T supports this feature. A conference call can only be set up when you have one call active and one call on hold, meaning both calls must have been answered. Once a conference call is set up, calls may be added, disconnected or separated (that is, removed from the conference call but still connected to you) by the person who set up the conference call. These options are all available from the In-Call menu. The maximum number of callers in a conference call is five. Once started, you are in control of the conference call, and only you can add calls to the conference call.

Making a Second Call

When the second call is connected, the first call is automatically placed on hold. You can swap between calls, by pressing the [SEND] key.

You can make a second call while currently on a call simply by tapping [Keypad] and entering dial numbers or tapping [Options] and searching for desired numbers from Contacts.

Setting Up a Conference Call

To set up a conference call, place one call on hold, conference in the second active call by tapping [Conference Call] - [Join calls].

Activate the Conference Call on Hold

To activate a conference call on hold, press the  [SEND] key.

Adding Calls to the Conference Call

To add a call to an existing conference call, select the Join Calls sub menu from the Conference Call option.



Private Call in a Conference Call

To have a private call with one caller from a conference call, tap the [Private Call] from the Conference Call option. When the numbers of the callers are displayed, select the one you wish to speak in private.

Ending a Conference Call

Currently active conference call can be disconnected by pressing the  [END] key.

Menu Tree

When you click the Menu below, you can go to the related menu directly.



Call Menu

This icon refers to the menus related to call, message and IM.



Dial



Address Book

- Contact List
- New Contact
- Favorites
- Caller Groups
- Speed Dial List
- Copy All Contacts
- Delete All Contacts
- Service Dial Numbers
- My Business Card
- View Options
- My Numbers



Recent Calls

- Missed Calls
- Dialed Calls
- Received Calls
- All Calls
- Call Duration
- Data Counter



Messaging

- New Message
- Inbox
- Drafts
- Outbox
- Sent
- Voicemail
- Templates
- Message Settings



IM



Mobile Email




Multimedia Menu

This icon refers to the menus related to Multimedia functions such as CV, Camera, video camera and AT&T services.



Cellular Video (CV)

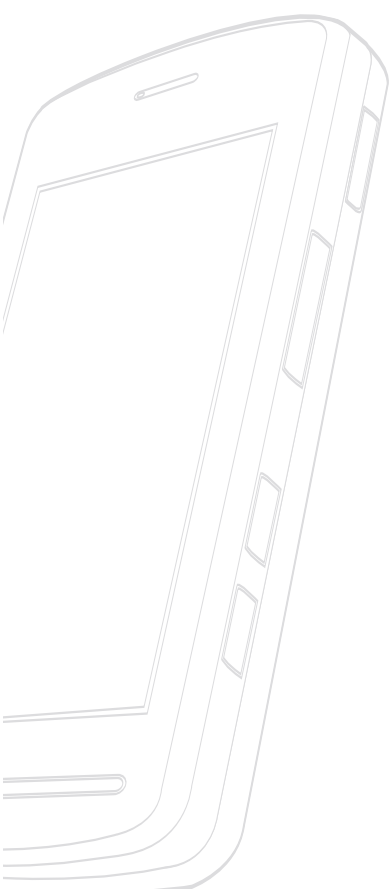

Media Net

- Media Net Home
- Bookmarks
- Saved Pages
- Enter URL
- Recent Pages
- Security
- Browser Settings



AT&T Mail

- Shop Tones
- Shop Games
- Shop Graphics
- Shop Multimedia
- Shop Applications
- Shop Videos



AT&T Music

- Music Player
- Shop Music
- MusicID
- XM Radio
- Music Videos
- The Buzz
- Community
- Music Apps



Camera

- Take Picture
- After you've taken your photo
- Record Video



Games



Applications



My Stuff Menu

This icon refers to the menus related to Tool for user's convenience.



Alarm Clock



Audio & Ringtones



Pictures



Videos



Calculator



Calendar



Tools

- Voice Command
- Notepad
- Tip Calculator
- World Clock
- Tasks
- Stopwatch
- Unit Converter



More

- Other Files
- Memory Card



Settings Menu

This icon refers to the menus related to settings of device.



Call

- Call Forwarding
- Send My Number
- Auto Redial
- Answer Mode
- Minute Minder
- Call Waiting
- Call Reject
- TTY
- Send DTMF Tones
- Video Share



Sound

- Shop Ringtones
- Ringtones
- Volume
- Message Alert Tones
- Alert Type
- Increasing Ringtone
- Power On/Off Tones



Display

- Wallpapers
- Backlight Timer
- ShortCut Menu
- Brightness

- Languages
- Dialing Fonts
- Clocks & Calendar
- Themes



Touch Settings



Date&Time

- Date
- Time
- Auto Update



Bluetooth

- Turn On
- Search New Device
- Paired Devices
- Settings




Quick Tips



More

- Security
- Connection
- Flight Mode
- Start Up Guide
- Touch Calibration
- Software Update
- Check Memory
- Handset Information
- Reset Settings

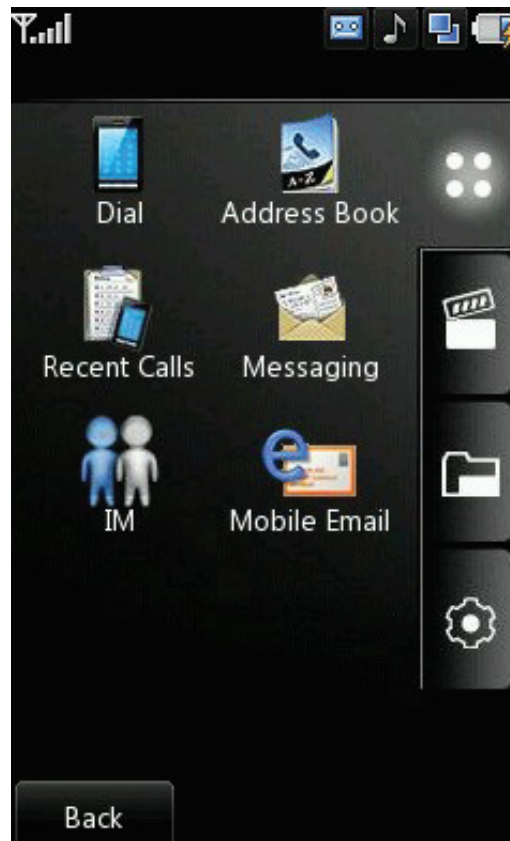

Call Menu

To enter Call menu, tap the  key in the idle screen.

Call Menu


Dial



This icon stands for the menu related to Call. If you select this icon, you can make a call, and send a message. You can enter Dialing, Message and Contacts menu directly in standby mode by tapping the corresponding icon.

To make and receive calls, make sure that the phone is turned on. To make a call, tap [] in standby mode or tap []-[Dial].

After the keypad is displayed on the screen, enter the phone number. Refer to page 21 in details regarding Calling.

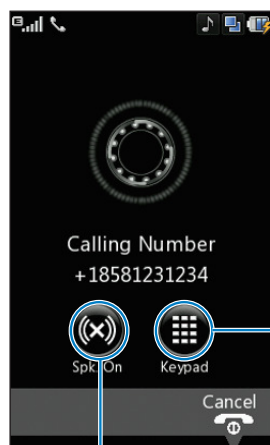

Tap  to open a numerical keypad for navigating menus with numbered options. For example when dialling call centers or other automated telephone services.

Tap  to set the Speak on or OFF.



Address Book

Contact List

There are two ways to enter Contact List.

1. Tap the [] in the idle screen then tap Address Book - Contact List.
2. Tap the [] key in the idle screen.

This menu allows you to save and manage contact address information. The Contacts' functions allow you to add a new address or search saved contact addresses by name.

New Contact

This menu allows you to add a new contact address. You can enter contact address information including name, phone numbers, email addresses, group information items, memos, ring tones, and image (photograph).

Favorites

This menu allows you to have your own favorite contact list. You can add and delete it.

Caller Groups

This menu allows you to manage group information. By default, there are 4 groups: family, friends, colleagues and school. You can also configure a ring tone for a group so that the group ring tone sounds when a call from a specific contact address within that group arrives and there is no ring tone configured for the specific contact address.

Speed Dial List

This menu allows you to configure the speed dial numbers. You can select a number from 2 to 9 as a speed dial. You can configure speed dial numbers for any of the 8 numbers for a specific contact address so that a contact address may have multiple speed dial numbers.



Copy All Contacts

This menu allows you to copy all of the information from your SmartChip, e.g. name, handset number, etc., to your handset. If a name is duplicated during the copying operation, the information is also duplicated.

- ▶ **SmartChip to Handset:** You can copy the entry from the SmartChip card to the phone memory.
- ▶ **Handset to SmartChip:** You can copy the entry from the handset memory to the SmartChip card (not all the data will be copied).

Delete All Contacts

You can delete all entries in the **SmartChip** and the **Handset**.

Press the  [END] key to return to standby mode.

Service Dial Numbers

You can view the list of Service Dialing Numbers (SDN) assigned by your network provider. Such numbers could include the emergency, directory assistance and voice mail numbers.

1. Select the Service dial number option.
2. The names of the available services will be shown.
3. Use the Scroll key to select a service. Tap the you want to call and press the  [SEND] key.

My Business Card

This option allows you to make your own name card. Key in the Name, Mobile number, Office number, Fax number and E-mail address.

View Options

You can select different options by which to display names in your address book: Handset & SmartChip, Handset Only, or SmartChip Only.

My Numbers

This displays your phone numbers stored in the SmartChip.



Recent Calls

Missed Calls

- View the number, if available, and call it or save it in the Address Book.
- Enter a new name for the number and save both in the Address Book.
- Send a message using this number.
- Delete the call from the list.

Dialed Calls

- View the number, if available, and call it or save it in the Address Book.
- Enter a new name for the number and save both in the Address Book.
- Send a message using this number.
- Delete the call from the list.

Received Calls

- View the number, if available, and call it or save it in the Address Book.
- Enter a new name for the number and save both in the Address Book.
- Send a message using this number.
- Delete the call from the list.

All Calls

Allows you to view all of missed, received, and dialed call records.

Call Duration

This allows you to view the duration of incoming and outgoing calls. You can also reset the call times. The following timers are available:

Last Call

Length of the last call.

Received Calls

Length of the incoming calls.



Dialed Calls

Length of outgoing calls.

All Calls

Total length of all calls made and incoming calls received since the timer was last reset.

Data Counter


You can check the Sent, Received or All data volumes and Reset all.

Messaging

New Message

! Note

If you select a graphic or an audio file while writing a multimedia message, the file loading time will take about 5 seconds. You will not be able to activate any key during the file loading time. When the file loading is complete, you will be able to write a multimedia message.

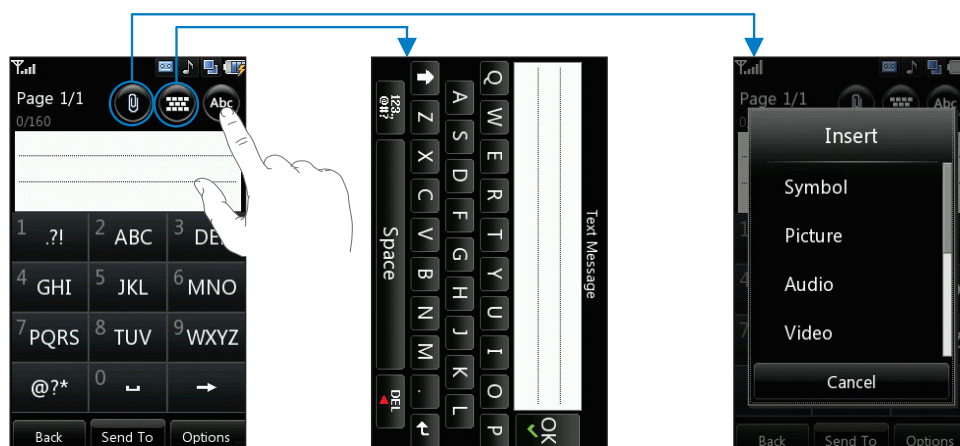

You can change the text entry mode by tapping this [] key.

ex) T9Abc → T9ABC → 123 → T9abc → T9Abc
Abc → ABC → 123 → abc → Abc



Editing a message

Tap [Options], then following options are available for Editing a Message.

• Insert

- ▶ **Symbol:** You can insert symbols ranging from sentence notes to emoticons. Select the one you want to insert by tapping.
- ▶ **Picture:** You can select a graphic image by tapping. You can preview the selected picture by tapping the image you want to see.
- ▶ **Audio:** You can insert various ringtones.

! Note

vCard, vCalendar, vNote and vTask are created by Address Book, Calendar, Notepad and Tasks respectively. Go to the Tools and Address Book sections for more detailed information.

- ▶ **Video:** You can insert a video clip by tapping [Video] and choosing it you want to insert.
 - ▶ **Take New Picture:** You can insert a image taken from the camera by tapping  in the screen or you can take it right away without transferring to Album. To check the camera options in detail, you can refer to page 70.
 - ▶ **Record New Audio:** You can record a new audio by tapping the center key [Record]. After recording a new audio, you can cancel it by tapping the right key [Delete]. To control the new audio menu, choose [Options] by tapping the right key. Under [Options], choose one of the followings.
 - * **Quality:** You can set the audio's quality to Fine, Normal or Economy.
 - * **Primary Storage:** You can assign the primary storage to Handset or Memory Card.
 - ▶ **Record New Video:** You can record new video.
 - ▶ **More:** Allows you to insert Subject, vCard, vCalendar, vNote, vTask, Template or Contact.
- **Save to Drafts:** Saves the selected message to draft.
 - ▶ **Qwerty:** When you tap this, the screen is changed to Qwerty keypad.



- **Delivery Options**

- **Validity Period:** This network service allows you to set how long your multimedia messages will be stored at the message center.
- **Delivery Receipt:** If it is set to Yes in this menu, you can check whether your message is sent successfully.
- **Reply via Same Message Center:** This menu allows you to determine whether to request a read confirmation mail to a recipient.
- **Text Entry Mode:** Sets the text input mode. For more details, refer to **Entering Text** (page 23).
- **Text Entry Settings:** **Text Entry Language** allows you to set the text entry language to English, Spanish or French. **T9 Next Word Prediction** is available when it is set to **On**. Use **T9 Dictionary** to add words or delete/reset/modify words.

Sending a Message

After completing a message using the **Options**, select **Send To** to send a message.

- Enter the recipient(s) as To, Cc and Bcc. You can use the Contacts option to choose a recipient by tapping .

Inbox

You will be alerted when you receive a message. They will be stored in the Inbox. In the Inbox, you can identify each message by icons. If you are notified that you have received a multimedia message, you can download the whole multimedia message by selecting it in the Receive menu.

The following [Options] are available in the Inbox list.

- ▶ **Save Contact Info:** You can save the sender's phone number in the Contact List.
- ▶ **Delete:** You can delete the current message.
- ▶ **Forward:** You can forward the selected message to another party.



- ▶ **Information:** You can view information about received messages; Message type, Subject, Sender's address, Message date & time, Priority, Message size, Attached Files (Only for Multimedia messages).
- ▶ **Multi Delete:** Deletes a number of messages you have selected from the folder.
- ▶ **Delete All Read Messages:** You can delete all read messages.
- ▶ **Delete All:** You can delete all messages.

Drafts

You can view the messages saved as a draft. The draft messages are listed with the date and time of when the messages were saved.

The following [Options] are available.

- ▶ **Delete:** Deletes the message you choose.
- ▶ **Information:** Allows you to view the information on the message.
- ▶ **Multi Delete:** Allows you to delete multiple messages you select from the folder.
- ▶ **Delete All:** Deletes all messages in the folder.

Outbox

Outbox is a temporary storage place for messages waiting to be sent.

When you press the make [SEND] key, you can make a call to the number of the recipient number of the selected message.

If the message is not sent from the Outbox, you will receive a sound alert along with a Message Sending Fail notice on the screen. Another attempt will be made to send the failed message and after two unsuccessful attempts, the message will no longer be sent automatically order to send the message that has failed, you must tap the [Resend] key.

After the maximum number of **Send** attempts has been reached the Send function has failed.

If you were trying to send a text message, open the message and check that the Sending options are correct.



When the message Send has failed, the following [Options] are available.

- ▶ **Delete:** Deletes the selected message which has failed.
- ▶ **Edit:** Allows you to edit the selected message.
- ▶ **Error Status:** Allows you to see the error status of the failed message (Only for Multimedia message).
- ▶ **Information:** Allows you to view the information on the message.
- ▶ **Delete All:** Deletes all messages in the folder.

Sent

This is where you can view the lists and contents of sent messages and also verify if transmission was successful.

The following [Options] are available.

- ▶ **Delete:** Deletes the selected message from the Sent list.
- ▶ **Information:** Allows you to view information on the message.
- ▶ **Delete All:** Deletes all messages in the folder.

Voicemail

This menu provides you with a quick way of accessing your voice mailbox.

To check the voicemail, tap **1** and hold the button in the dial keypad.

When new voicemail is received, the symbol **VM** will be displayed on the screen.

! Note

Please check with AT&T for details of their service in order to configure the handset accordingly.



Templates

Text Templates

There are 6 predefined messages in the list. You can view and edit the template messages or create new messages.

The following [Options] are available.

- ▶ **Send:** Allows you to send the selected template via Message.
- ▶ **Delete:** Allows you to delete the selected template message.
- ▶ **Edit:** Allows you to write a new message or edit the selected template message.
- ▶ **Delete All:** Deletes all messages in the folder.

Multimedia Templates

1. You can add new multimedia templates by tapping [New].

2. The following choices are available under Options.

- ▶ **Insert:** Allows you insert Symbol, Picture, Audio, Video, Take New Picture, Record New Audio, Record New Video and More.
- ▶ **Text Entry Mode:** Sets the text input mode as abc, Abc, ABC, T9 abc, T9 Abc, T9 ABC and 123.
- ▶ **Text Entry Settings: Text Entry Language** allows you to set the text entry language to English, Spanish or French. **T9 Next Word Prediction** is available when it is set to **On**. Use **T9 Dictionary** to add words or delete/reset/modify words.
- ▶ **Cancel:** Allows you to exit the text input mode without saving your message.

Signature

This feature allows you to create your Text signature. You can use symbols, text templates and contacts as part of the signature.



Message Settings

Text Message

- ▶ **Message Center Number:** If you want to send a text message, you can get the address of the SMS center by using this menu.
- ▶ **Email Gateway:** You can send the text message to an Email Address via this gateway.
- ▶ **Message Subject:** You can enter the SMS Subject from this menu.
- ▶ **Insert Signature:** You can insert your own signature that you created.

Multimedia Message

- ▶ **Priority:** You can set the priority of the message you choose.
- ▶ **Message Subject:** You can enter the MMS Subject when this menu is on.
- ▶ **Validity Period:** This network service allows you to set how long your multimedia messages will be stored at the message center.
- ▶ **Send Delivery Receipt:** Allows you to send a delivery confirmation mail for a Multimedia Message.
- ▶ **Send Read Receipt:** Allows you to send a message read confirmation mail for a Multimedia Message.
- ▶ **Download Options**
 - **Download without Ask:** Allows Multimedia Message to be downloaded automatically.
 - **Ask Always:** You can download a multimedia message manually.
 - **Discard:** Used when user reject to download Multimedia Message.
- ▶ **Message Center:** The details for the Multimedia gateway are pre-loaded onto your handset and should not be changed.



Saved Conversations

This is where a user can view saved conversations.

Change Provider: You can change the provider.

Settings

- ▶ **Set Sound:** Allows you to set on/off an alert for the Contact when they have activity on their session.
- ▶ **Default Provider:** Allows you to set the default IM community to login.
- ▶ **Auto Sign In:** You may set the automatic IM Login process by choosing between the '**When Power On**' or '**When IM Start**' options.
- ▶ **Network:** You may check your IM Network Profiles or Server Address information.

IM Information

This indicates the Instant Messaging Client Information such as Client Name and Version Number.

Online Menu / 1 to 1 conversation

After a successful Login, a list of contacts with Screen Names will appear on screen. Depending on the cursor location in the contacts, the following menu options will be available.

When cursor is located on a Conversations List

! Note

The Conversations List contains both the active contact where a conversation has taken place as well as an unknown contact.

When you select on the Conversation List, it offers the ability to view or hide conversations.



- ▶ **Send Message to...:** This offers the ability to send a message to an unknown contact. When selected, a User ID must be typed in prior to starting an IM session or conversation.
- ▶ **Saved Conversations:** You may view or delete the stored conversation session.
- ▶ **Search:** This allows you to search for the contact by Email address or name.
- ▶ **Settings**
 - **Display Name**
 - **My Status:** Allows you to set your status to Available, Busy or Invisible.
 - **List Sort By**
 - **Set Sound:** Allows you to set an alert for the Contact when they have activity on their session.
 - **Auto Sign In:** You may Login to an IM client automatically with the 'When Power On' or 'When IM Start' options.
- ▶ **Sign Out:** This begins the Logout process.

When cursor is located on a Conversation

- ▶ **End Conversation:** This closes the selected conversation. If an unknown contact was selected, that contact is deleted.
- ▶ **Block/Unblock Contact:** This allows you to block/unblock the selected Conversations Contact.
- ▶ **Contact Info:** This allows you to view the User ID and Status Text information.
- ▶ **Settings:** Please refer to the previous Settings Menu.
- ▶ **Sign Out:** This begins the Logout process.



When cursor is located on a Contact List

- ▶ **Add Contact:** This adds a new contact to the selected contacts' list; in the meantime this searches for the contact on the basis of E-mail Address, First Name, or Last Name.
- ▶ **Refresh List:** This refreshes the present information on the contacts within the contacts.
- ▶ **Send Message to...:** This offers the ability to send a message to an unknown contact. When selected, the User ID must be typed in prior to starting an IM session or conversation.
- ▶ **Saved Conversations:** This is where a user can view saved conversations.
- ▶ **Search:** This allows you to search for the contact by Email address or name.
- ▶ **Settings:** Please refer to the previous Settings Menu.
- ▶ **Sign Out:** This begins the Logout process.

When cursor is located on a Contact

- ▶ **Add Contact:** This adds a new contact to the selected contacts list; in the meantime this searches for the contact on the basis of E-mail Address, First Name, or Last Name.
- ▶ **Delete Contact:** This deletes the selected Contact.
- ▶ **Block/Unblock Contact:** This allows or blocks conversation with the selected Contact.
- ▶ **Refresh Contact List:** This refreshes the present information on the selected contact.
- ▶ **Contact Info:** This allows you to view information. It provides User ID, Status Text.
- ▶ **Blocked List**
- ▶ **Settings:** Please refer to the previous Settings Menu.
- ▶ **Sign Out:** This begins the Logout process.



► Log In

1. Tap and type your existing email ID.
2. Tap the Password field and type your password.

! Quick tip

- Your password is case sensitive. Tap the keypad to change to lower case or upper case.
3. Tap to highlight the Remember me and tap [Mark] to save your password.
 4. Tap the [Sign in]

You can choose [Inbox], [Drafts], [Sent] and [Trash]. Tap [Options] to select Read, Delete or Compose New.

- **Opening an Email:** Tap [Read] after highlighting the email subject line you want to open by scrolling the bar. Once the email opens, select [Options] to reply, Forward, Delete.
- **Deleting an Email:** Tap the email you want to delete by scrolling down the key and tap [Options]-[Delete].

For additional details, visit att.com/wireless



- 4. Proxy Address:** Proxy server address.
- 5. Proxy Port Number:** Proxy server's port number.
- 6. Security:** Select the secure or non-secure mode.
- 7. Time Out:** Values between 10 to 600 seconds.
- 8. Network Profile:** You can choose one from the network profiles. Note you can create a new network profile by selecting the list option on the center key.

Note

- 1. AT&T has provided default settings regarding account information.
- 2. Creating or editing an account requires care. The browser cannot connect to the Internet if the account information is not correct.

Primary Storage

You can assign the primary storage to **Handset** or **Memory Card**.

Cache Settings

The web pages you have accessed are stored in the memory of the phone.

- ▶ **Clear Cache:** Remove all cached data in the memory.
- ▶ **Allow Cache:** Set a value to determine whether a connection attempt is made through the cache or not.

Note

A cache is a buffer memory, which is used to store data temporarily, especially when it is online.

Cookie Settings

The information or services you have accessed are stored in the cookie.

- ▶ **Delete Cookies:** Remove all cookies.
- ▶ **Allow Cookies:** Set a value to determine whether a connection attempt is made through the cookie or not.



Character Encoding

Allows you to select the character encoding to visit a foreign website. Select a character set from the following list:

- | | |
|----------------------|------------------------|
| 1 Automatic | 2 English(ASCII) |
| 3 English(ISO) | 4 English(LATIN) |
| 5 Unicode(UCS2 BE) | 6 Unicode(UCS2 LE) |
| 7 Unicode(UCS2 Auto) | 8 Unicode(UTF-16 BE) |
| 9 Unicode(UTF-16 LE) | 0 Unicode(UTF-16 Auto) |
| * Unicode(UTF-8) | |

JavaScript

Select whether to turn Java script On or Off.

AuthWallet

If set to On, the user's personal information such as ID and Password used to access the Internet site will be saved automatically for future use.

Online menu

Once you are connected to the Internet, the followings below are available:

- ▶  **Backward**
- ▶  **Forward**
- ▶  **Refresh**
- ▶  **Home**
- ▶  **Favorite**
- ▶  **Zoom**
- ▶  **Landscape**
- ▶  **Options:** Allows you to set options such as Full Screen View, Show Thumbnail, Recent Pages, Bookmark, Enter URL, Send URL and Settings.



Adding Music To Your Handset

Before You Get Started

To transfer music from your PC to your device, you will need the following:

- Windows Media Player 10 or above
- Windows XP Service Pack 2
- Music on your PC in one of these formats: MP3, .AAC, AAC+ or WMA
- A MicroSD card (supports up to 4GB cards)
- USB data cable

*microSD card and USB data cable sold separately; go to att.com/wireless

Transferring Music from the Digital Music Stores

In order to download music from the computer to your phone, handset, a microSD card and USB data cable are required. These items are sold separately; go to att.com/wireless

1. Using your computer, open your preferred WMDRM PC music management client.
2. Download the selected song to your library.
3. Insert the microSD card into the handset.
4. Use the USB adapter cable to connect the handset to the target PC. When you try to connect handset on your PC, the handset displays "Connecting as Music Sync..."
5. Once the USB connection has been established, the handset displays "Connected as Music Sync Mode. Do not disconnect during transfer." and the computer screen then shows the VU device. If the detection occurs, skip to step 11.

Note

If the target computer does not detect the newly connected handset or show the Portable Device on the PC screen, please follow steps 6 - 10.



6. When the Idle screen displays, tap  key which is located in the lower left corner.
7. Select and tap the lower setting key .
8. Select and tap [More] key.
9. Select and tap Connection.
10. Select and tap USB Connection Mode.
11. Select and tap Music Sync. Or use the scroll key to highlight Music Ssync and tap the [SET] key.
12. Highlight the song you wish to download to the handset.
13. Using your right mouse button, click on the highlighted song and select Transfer Track(s) to Portable Device from the dropdown menu. This step begins the download process.

Drag and Drop Music Using VU As A Mass Storage Device

1. Insert a MicroSD memory card.
2. Power on the phone.
3. Before you connect the device, set the mobile to Mass Storage Mode. Tap the [] key, then [Settings menu icon] - [More] - [Connection] - [USB Connection Mode] - Mass Storage.
4. Connect the device to a PC using a VU USB data cable.
5. A bubble "Found New Hardware LG USB Modem" , which appears on the screen means it's ready.
6. Access My Computer on the PC.
7. The phone's memory card will be listed under "Devices with Removable Storage" in the same location as an optical drive.

Note

The PC will automatically assign a drive letter.

8. File explore in a new window for desired music files.



9. Drag and drop the desired music content from the PC window to the "Storage Card" window.

! Note

If you copy music to your SD card's MTP folder while in UMS mode or delete, modify or move files from the MTP folder, this will not update your Music Player. Please copy music to Music folder if in UMS mode.

10. Disconnect the device from the cable.

11. Access the Music Player on the phone.

! Note

Sideload is not supported via Bluetooth.

Adding Music to your Handset

Music files can be added to your handset by using one or more of the following methods:

- Download music and ringtones over the AT&T network directly to your device by using the shopping for music feature.
- From your existing digital media collection thru Windows Media Player®.
- From music stores through the applicable music client.

Transferring Music using Windows Media Player

A USB cable, microSD card, and a current version of the Windows Media Player are required for this procedure.

1. Open Windows Media Player on your computer (version 10.0 or higher).
2. Use the USB adapter cable to connect the handset to the target PC. When you try to connect handset on your PC, the handset displays "Connecting as Music Sync..."
3. Once the USB connection has been established, the handset displays "Connected as Music Sync Mode. Do not disconnect during transfer." and the computer screen then shows the VU device.

! Note

If the target computer does not detect the newly connected handset or show the Portable Device on the PC screen, please follow steps 6 - 10 from the previous "Transferring Music from the Digital Music Stores" on page.



4. From within the Windows Media Player application, click on the Sync tab. Previously downloaded songs are then listed on the left side of the application in case that Windows Media Player 11 is installed.
5. Choose the destination location for the media files. The VU Music Sync Player appears in a drop-down list on the right side of the screen. You can see the words VU Music Sync Player in the upper right side of the Windows Media Player. When you click +, it shows information of the Music in VU.

! Note

If there are no items present in the playlist, click the Edit Playlist button and begin adding the music files from among the various media categories.

6. Select the songs to be highlighted and right click to add to 'Sync List' to synchronize to your handset.
7. Tap the Start Sync at the lower right corner of the application to download the selected songs to your handset. Do not unplug the handset during this process. Once complete, a Music folder appears below the VU Music Sync Player on the right of the Sync tab.
8. It is now safe to unplug the USB connector from the handset.

Transferring a Playlist to the handset

1. Open Windows Media Player on your computer (version 10.0 or higher).
2. Use the USB adapter cable to connect the handset to the target PC. When you try to connect handset on your PC, the handset displays "Connecting as Music Sync...".
3. Once the USB connection has been established, the handset displays "Connected as Music Sync Mode. Do not disconnect during transfer." and the computer screen then shows the VU device.

! Note

If the target computer does not detect the newly connected handset or provide an pop up Portable device window on the PC screen, please follow steps 6 - 10 from the previous "Transferring Music from the Digital Music Stores" .



4. From within the Windows Media Player application, click on the Library tab.
5. From the left side of the Library tab, click on All Music. The right side of the page is then populated with all of the songs which the player has previously found.
6. Right click on the song entry and select, Add to.. > Additional Playlists.
7. From the Add to Playlist dialog, click the New button and type in a unique playlist name.
8. Click OK when you are done entering the new playlist name. The new Windows Media playlist is then displayed within the My Playlist section of the Library tab (left side).
9. Drag and drop the newly created playlist from the My Playlist section to the phone Music Sync Player listed just above it. The phone Music Sync Player appears on the left side of the screen.

! Note

If there are no items present in the playlist, click the Edit Playlist button and begin adding the music files from among the various media categories.

10. It is now safe to unplug the USB connector from the handset.

! Note

1. If you connect handset with specific USB Hub on your PC, above Music Sync service can not be work. So we recommend direct USB Connection on your PC not using HUB.
2. Once you connect your mobile phone to the PC, the phone's screen will display the "Connecting as Music Sync..." message. If the message does not change to "Connected as Music Sync Mode. Do not disconnect during transfer.", check if your PC is running Windows XP and Windows Media Player 10 or later. If your PC is running Windows XP and Windows Media Player 9, please download WMP10 or WMP11 by visiting Microsoft site. If your PC is running XP and WMP10 or later but "Connecting as Music Sync..." message does not disappear from the screen after you have tried to establish connection three to four times, perform one of the following methods and try again. Notice that all of the existing data will be erased on microSD card if you use the below process.



Music Videos

Selecting Music Videos from the AT&T Music sub menu launches a browser which takes you directly into the Music Video section of Cellular Video. From this menu, you will have access to music videos from the latest artist as well as programming from AT&T, MTV, VHI, and CMT among others. Simply click on a video and begin watching!

Note

Additional charges may incur when downloading music video contents. Contact AT&T for further information.

The Buzz

Selecting The Buzz from the AT&T Music sub menu launches a preinstalled java application (e.g. Billboard). The application allows the user to obtain relevant music industry news and information including charts, news, and concert locations.

Community

Selecting Community from the AT&T Music sub menu launches the browser to either one or more of the hot user communities. The application allows the user to interact with their friends and the community as well as review artist fan sites.

Music Apps

Selecting Music Apps from the AT&T Music sub menu launches the browser to an area where the user can purchase music related applications for download.

Camera

There are two ways to go to Camera mode.

1. Tap the [] in the idle screen then tap  →  - [Take Picture]
2. Press the camera key  located on the right side of the phone in the standby mode. Then you can go to the Camera mode directly.

After moving to the Camera mode, you can press this  button. (See p8 to check the rightside of the Phone.) Then you can capture the image you've taken.



By tapping this icon [], you can set the options below.

Menu	Description
Record Mode	Sets the recording mode among MMS Mode, Video Share Mode and General Mode.
Quality	Determines the quality of a video clip. (Super Fine/Fine/Normal)
White Balance	This adjusts the light effect level and you can select from the following options: Auto / Daylight / Incandescent / Cloudy / Fluourescent.
Color Effect	Allows you to apply special effects to the video clip. Tap the color you want to use from the following options:
Display Grid	Allows to divide the screen. (Simple cross/Trisection/ Off)
Default Settings	You can initialize all default settings.





1. **Call <Name or Number>**: This function is activated only when if user says command “Call” and name stored in address book or specified phone number. Handset, voice engine inside recognize users utterance handset, displays name lists from your phone’s address book or phone number, however noise might caused to display candidates. Additionally user can superimpose number type at the end optionally, such as “mobile”, “home” or “office”.
2. **Listen Voicemail**: this command is activated when the user says the words “Listen voicemail”. You will be automatically connected to your voicemail.
3. **Missed Calls**: this command is activated when the user says the words “Missed calls”. The mobile phone presents missed call lists.
 - **commands available to user**
 - **yes**: make phone call
 - **no**: moves next missed call list
 - **cancel**: go back to main voice command menu
 - **exit**: terminate voice command
4. **Messages**: this command is activated when the user says the word “messages”. Mobile phone displays details of unread SMS or MMS messages.
 - **commands available to user**
 - **yes**: make phone call
 - **no**: moves next unread messages
 - **cancel**: go back to main voice command menu
 - **exit**: terminate voice command
5. **Time & Date**: this command is activated when the user says the words “time and date”. The phone displays the current local time and date.

The voice command also has menu options

- **mode**
 - **speed**: voice command is abbreviated
 - **normal**: voice command is played normally
- **train**
 - **answer**: enables the user train for answers used via voice command
 - **number**: enables the user train for numbers used via voice command



A2DP profile

This icon appears when the A2DP profile is used between the stereo headset device and the phone. This allows you to listen to an audio clip. A2DP is the Advanced Audio Distribution Profile, which provides support for streaming either mono or stereo audio using Bluetooth.

Hand-free +A2DP profile

This icon appears when both profiles of the hands-free and the A2DP are used between the compatible device and the phone. This allows you to call and listen to an audio clip using a Bluetooth connection.

For using each device, see a manual that comes with the device.

! Note

We recommend that your phone and the Bluetooth device you are communicating with be no more than 10 meters apart. The connection may be improved if there are no solid objects in between your phone and the other Bluetooth device.

Turn On

This menu sets the Bluetooth on or off.

Search New Device

This function allows you to search and add new device at once.

Paired Devices

This function allows you to view the list of all devices that are paired with your phone at once.

To add a new device, tap [New].

1. Tap [New] key to search the device that can be connected and which is within range.
2. If you want to stop searching, tap [Cancel].
3. All of the devices found are displayed in the pop-up menu.

Select the desired device by tapping [OK] and entering the password.



PIN Code Request

When the PIN code request feature is set to 'On', you must enter your PIN each time you switch the phone on. Consequently, any person who does not have your PIN cannot use your phone without your approval.

! Note

Before setting the PIN code request feature to Off, you must enter your PIN

The following [Options] are available:

- ▶ **On:** You must enter the PIN each time the phone is switched on.
- ▶ **Off:** The phone connects directly to the network when you switch it on.

Fixed Dial Number

This allows you to restrict your outgoing calls to selected phone numbers, if this function is supported by your SmartChip. The PIN2 code is required.

▶ FDN On/Off

- **On:** You can only call phone numbers stored in the Address Book. You must enter your PIN2.
- **Off:** You can call any number.

▶ FDN List

! Note

Not all SmartChips have a PIN2. If your SmartChip does not, this menu option is not displayed.

Auto Screen Lock

If you activate this function, the key will be locked automatically in standby mode without requesting the action of key.

Change Codes

The Change codes feature allows you to change your current password to a new one. You must enter the current password before you can specify a new one.



Q Why does the phone heat up?

A The phone may get hot when there is a very long call duration or when games are played or even when surfing the Internet for a long time. This has no effect upon the life of the product or performance.

Q Why does the battery run out so quickly during normal use?

A It is due to the user environment or a large number of calls or a weak signal.


Q Why is no number dialed when you recall an Address Book entry?

A Check that the number has been stored correctly by using the Address book Search feature. Re-store them, if necessary.



Data Cable Kit

* When installing, make sure to connect to the PC after your phone and the cable have been connected. Otherwise, your PC may have a problem.



Note

- Always use genuine LG accessories. Failure to do this may invalidate your warranty.
- Accessories may be different in different regions; please check with our regional service company or agent for further enquiries.



Safety Information

Read these simple guidelines. Breaking the rules may be dangerous or illegal. Further detailed information is given in this user guide.

- ▶ Do not disassemble this unit. Take it to a qualified service technician when repair work is required.
- ▶ Keep away from electrical appliances such as TVs, radios, and personal computers.
- ▶ The unit should be kept away from heat sources such as radiators or cookers.
- ▶ Do not drop.
- ▶ Do not subject this unit to mechanical vibration or shock.
- ▶ The coating of the phone may be damaged if covered with wrap or vinyl wrapper.
- ▶ Use dry cloth to clean the exterior of the unit. (Do not use solvent such as benzene, thinner or alcohol.)
- ▶ Do not subject this unit to excessive smoke or dust.
- ▶ Do not keep the phone next to credit cards or transport tickets; it can affect the information on the magnetic strips.
- ▶ Do not tap the screen with a sharp object; otherwise, it may damage the phone.
- ▶ Do not expose the phone to liquid or moisture.
- ▶ Use the accessories like an earphone cautiously. Do not touch the antenna unnecessarily.

Memory card information and care

- ▶ The memory card cannot be used for recording copyright-protected data.
- ▶ Keep the memory card out of the small children's reach.
- ▶ Do not leave the memory card in extremely hot location.
- ▶ Do not disassemble or modify the memory card.



FCC RF Exposure Information

WARNING! Read this information before operating the phone.

In August 1996, the Federal Communications Commission (FCC) of the United States, with its action in Report and Order FCC 96-326, adopted an updated safety standard for human exposure to radio frequency (RF) electromagnetic energy emitted by FCC regulated transmitters. Those guidelines are consistent with the safety standard previously set by both U.S. and international standards bodies.

The design of this phone complies with the FCC guidelines and these international standards.

CAUTION

Use only the supplied and approved antenna. Use of unauthorized antennas or modifications could impair call quality, damage the phone, void your warranty and/or result in violation of FCC regulations. Do not use the phone with a damaged antenna. If a damaged antenna comes into contact with skin, a minor burn may result. Contact your local dealer for a replacement antenna.

Body-worn Operation

This device was tested for typical body-worn operations with the back of the phone kept 0.6 inches (1.5cm) between the user's body and the back of the phone. To comply with FCC RF exposure requirements, a minimum separation distance of 0.6 inches(1.5cm) must be maintained between the user's body and the back of the phone. Third-party belt-clips, holsters, and similar accessories containing metallic components should not be used. Body-worn accessories that cannot maintain 0.6 inches(1.5cm) separation distance between the user's body and the back of the phone, and have not been tested for typical body-worn operations may not comply with FCC RF exposure limits and should be avoided.

FCC Part 15 Class B Compliance

This device and its accessories comply with part 15 of FCC rules. Operation is subject to the following two conditions:



(1) This device and its accessories may not cause harmful interference, and (2) this device and its accessories must accept any interference received, including interference that may cause undesired operation.

Cautions for Battery

- ▶ Do not disassemble..
- ▶ Do not short-circuit.
- ▶ Do not expose to high temperature: 60°C (140°F).]
- ▶ Do not incinerate.

Battery Disposal

- ▶ Please dispose of your battery properly or bring to your local wireless carrier for recycling.
- ▶ Do not dispose in fire or with hazardous or flammable materials.

Adapter (Charger) Cautions

- ▶ Using the wrong battery charger could damage your phone and void your warranty.
- ▶ The adapter or battery charger is intended for indoor use only.

Do not expose the adapter or battery charger to direct sunlight or use it in places with high humidity, such as the bathroom.

Avoid damage to your hearing

- ▶ Damage to your hearing can occur if you are exposed to loud sound for long periods of time. We therefore recommend that you do not turn on or off the handset close to your ear. We also recommend that music and call volumes are set to a reasonable level.
- ▶ If you are listening to music while out and about, please ensure that the volume is at a reasonable level so that you are aware of your surroundings. This is particularly imperative when attempting to cross the street.



Antenna Care

Use only the supplied or an approved replacement antenna. Unauthorized antennas, modifications, or attachments could damage the phone and may violate FCC regulations.

Phone Operation

NORMAL POSITION: Hold the phone as you would any other telephone with the antenna pointed up and over your shoulder.

Tips on Efficient Operation

For your phone to operate most efficiently:

- ▶ Do not touch the antenna unnecessarily when the phone is in use. Contact with the antenna affects call quality and may cause the phone to operate at a higher power level than otherwise needed.

Driving

Check the laws and regulations on the use of wireless phones in the areas where you drive. Always obey them. Also, if using your phone while driving, please:

- ▶ Give full attention to driving - driving safely is your first responsibility;
- ▶ Use hands-free operation, if available;
- ▶ Pull off the road and park before making or answering a call if driving conditions so require.

Electronic Devices

Most modern electronic equipment is shielded from RF signals. However, certain electronic equipment may not be shielded against the RF signals from your wireless phone.

Pacemakers

The Health Industry Manufacturers Association recommends that a minimum separation of six (6') inches be maintained between a handheld wireless phone and a pacemaker to avoid potential interference with the pacemaker. These



recommendations are consistent with the independent research by and recommendations of Wireless Technology Research.

Persons with pacemakers:

- ▶ Should ALWAYS keep the phone more than six inches from their pacemaker when the phone is turned ON;
- ▶ Should not carry the phone in a breast pocket.
- ▶ Should use the ear opposite the pacemaker to minimize the potential for interference.
- ▶ If you have any reason to suspect that interference is taking place, turn your phone OFF immediately.

Hearing Aids

Some digital wireless phones may interfere with some hearing aids. In the event of such interference, you may want to consult AT&T.

Other Medical Devices

If you use any other personal medical device, consult the manufacturer of your device to determine if they are adequately shielded from external RF energy. Your physician may be able to assist you in obtaining this information.

Health Care Facilities

Turn your phone OFF in health care facilities when any regulations posted in these areas instruct you to do so. Hospitals or health care facilities may use equipment that could be sensitive to external RF energy.

Vehicles

RF signals may affect improperly installed or inadequately shielded electronic systems in motor vehicles. Check with the manufacturer or its representative regarding your vehicle.

You should also consult the manufacturer of any equipment that has been added to your vehicle.



Posted Facilities

Turn your phone OFF in any facility where posted notices so require.

Aircraft

FCC regulations prohibit using your phone while in the air. Turn your phone OFF before boarding an aircraft.

Blasting Areas

To avoid interfering with blasting operations, turn your phone OFF when in a 'blasting areas or in areas posted: 'Turn off two-way radio'. Obey all signs and instructions.

Potentially Explosive Atmosphere

Turn your phone OFF when in any area with a potentially explosive atmosphere and obey all signs and instructions. Sparks in such areas could cause an explosion or fire resulting in bodily injury or even death.

Areas with a potentially explosive atmosphere are often, but not always, marked clearly. Potential areas may include: fueling areas (such as gasoline stations); below deck on boats; fuel or chemical transfer or storage facilities; vehicles using liquefied petroleum gas (such as propane or butane); areas where the air contains chemicals or particles (such as grain, dust, or metal powders); and any other area where you would normally be advised to turn off your vehicle engine.

For Vehicles Equipped with an Air Bag

An air bag inflates with great force. DO NOT place objects, including either installed or portable wireless equipment, in the area over the air bag or in the air bag deployment area. If in-vehicle wireless equipment is improperly installed and the air bag inflates, serious injury could result.



Safety Information

Please read and observe the following information for safe and proper use of your phone and to prevent damage. Also, keep the user guide in an accessible place at all the times after reading it.

- ▶ Do not disassemble or open crush, bend or deform, puncture or shred.
- ▶ Do not modify or remanufacture, attempt to insert foreign objects into the battery, immerse or expose to water or other liquids, expose to fire, explosion or other hazard.
- ▶ Only use the battery for the system for which it is specified.
- ▶ Only use the battery with a charging system that has been qualified with the system per IEEE-Std- 1725-2006. Use of an unqualified battery or charger may present a risk of fire, explosion, leakage, or other hazard.
- ▶ Do not short circuit a battery or allow metallic conductive objects to contact battery terminals.
- ▶ Replace the battery only with another battery that has been qualified with the system per this standard, IEEE-Std-1725-2006. Use of an unqualified battery may present a risk of fire, explosion, leakage or other hazard.
- ▶ Promptly dispose of used batteries in accordance with local regulations.
- ▶ Battery usage by children should be supervised.
- ▶ Avoid dropping the phone or battery. If the phone or battery is dropped, especially on a hard surface, and the user suspects damage, take it to a service center for inspection.
- ▶ At least, one of the Authentication methods may be implemented. (e.g. H/W, S/W, Mechanical, Hologram, etc.)
- ▶ Improper battery use may result in a fire, explosion or other hazard.

Charger and Adapter Safety

- ▶ The charger and adapter are intended for indoor use only.



Battery Information and Care

- ▶ Please dispose of your battery properly or take it to your local wireless carrier for recycling.
- ▶ The battery does not need to be fully discharged before recharging.
- ▶ Use only LG-approved chargers specific to your phone model since they are designed to maximize battery life.
- ▶ Do not disassemble or impact the battery as it may cause electric shock, short-circuit, and fire. Store the battery in a place out of reach of children.
- ▶ Keep the battery's metal contacts clean.
- ▶ Replace the battery when it no longer provides acceptable performance. The battery can be recharged several hundred times before replacement.
- ▶ Recharge the battery after long periods of non-use to maximize battery life.
- ▶ Battery life will vary due to usage patterns and environmental conditions.
- ▶ Use of extended backlighting, MEdia Net Browsing, and data connectivity kits affect battery life and talk/standby times.
- ▶ The self-protection function of the battery cuts the power of the phone when its operation is in an abnormal state. In this case, remove the battery from the phone, reinstall it, and turn the phone on.

Explosion, Shock, and Fire Hazards

- ▶ Do not put your phone in a place subject to excessive dust and keep the minimum required distance between the power cord and heat sources.
- ▶ Unplug the power cord prior to cleaning your phone, and clean the power plug pin when it is dirty.
- ▶ When using the power plug, ensure that it is firmly connected. If it is not, it may cause excessive heat or fire.
- ▶ If you put your phone in a pocket or bag without covering the receptacle of the phone (power plug pin), metallic articles (such as a coin, paperclip or pen) may short-circuit the phone. Always cover the receptacle when not in use.



- ▶ Do not short-circuit the battery. Metallic articles such as a coin, paperclip or pen in your pocket or bag may short-circuit the + and – terminals of the battery (metal strips on the battery) upon moving. Short-circuit of the terminal may damage the battery and cause an explosion.

General Notice

- ▶ Using a damaged battery or placing a battery in your mouth may cause serious injury.
- ▶ Do not place items containing magnetic components such as a credit card, phone card, bank book or subway ticket near your phone. The magnetism of the phone may damage the data stored in the magnetic strip.
- ▶ Talking on your phone for a long period of time may reduce call quality due to heat generated during use.
- ▶ When the phone is not used for a long period time, store it in a safe place with the power cord unplugged.
- ▶ Using the phone in proximity to receiving equipment (i.e., TV or radio) may cause interference to the phone.
- ▶ Do not use the phone if the antenna is damaged. If a damaged antenna contacts skin, it may cause a slight burn. Please contact an LG Authorized Service Centre to replace the damaged antenna.
- ▶ Do not immerse your phone in water. If this happens, turn it off immediately and remove the battery. If the phone does not work, take it to an LG Authorized Service Centre.
- ▶ Do not paint your phone.
- ▶ The data saved in your phone might be deleted due to careless use, repair of the phone, or upgrade of the software. Please backup your important phone numbers. (Ring tones, text messages, voice messages, pictures, and videos could also be deleted.) The manufacturer is not liable for damage due to the loss of data.
- ▶ When you use the phone in public places, set the ring tone to vibration so as not to disturb others.

- ▶ Do not turn your phone on or off when putting it in your ear.

FDA Consumer Update

The U.S. Food and Drug Administration Centre for Devices and Radiological Health Consumer Update on Mobile Phones.

1. Do wireless phones pose a health hazard?

The available scientific evidence does not show that any health problems are associated with using wireless phones. There is no proof, however, that wireless phones are absolutely safe. Wireless phones emit low levels of radiofrequency energy (RF) in the microwave range while being used. They also emit very low levels of RF when in the standby mode. Whereas high levels of RF can produce health effects (by heating tissue), exposure to low level RF that does not produce heating effects causes no known adverse health effects. Many studies of low level RF exposures have not found any biological effects. Some studies have suggested that some biological effects may occur, but such findings have not been confirmed by additional research. In some cases, other researchers have had difficulty in reproducing those studies, or in determining the reasons for inconsistent results.

2. What is the FDA's role concerning the safety of wireless phones?

Under the law, the FDA does not review the safety of radiation-emitting consumer products such as wireless phones before they can be sold, as it does with new drugs or medical devices. However, the agency has authority to take action if wireless phones are shown to emit radiofrequency energy (RF) at a level that is hazardous to the user. In such a case, the FDA could require the manufacturers of wireless phones to notify users of the health hazard and to repair, replace, or recall the phones so that the hazard no longer exists.

Although the existing scientific data do not justify FDA regulatory actions, the FDA has urged the wireless phone industry to take a number of steps, including the following:

- ▶ Support needed research into possible biological effects of RF of the type emitted by wireless phones;





- ▶ Design wireless phones in a way that minimizes any RF exposure to the user that is not necessary for device function; and
- ▶ Cooperate in providing users of wireless phones with the best possible information on possible effects of wireless phone use on human health.

The FDA belongs to an interagency working group of the federal agencies that have responsibility for different aspects of RF safety to ensure coordinated efforts at the federal level. The following agencies belong to this working group:

- ▶ National Institute for Occupational Safety and Health
- ▶ Environmental Protection Agency
- ▶ Occupational Safety and Health Administration (Administración de la seguridad y salud laborales)
- ▶ Occupational Safety and Health Administration
- ▶ National Telecommunications and Information Administration

The National Institutes of Health participates in some interagency working group activities, as well.

The FDA shares regulatory responsibilities for wireless phones with the Federal Communications Commission (FCC). All phones that are sold in the United States must comply with FCC safety guidelines that limit RF exposure. The FCC relies on the FDA and other health agencies for safety questions about wireless phones.

The FCC also regulates the base stations that the wireless phone networks rely upon. While these base stations operate at higher power than do the wireless phones themselves, the RF exposures that people get from these base stations are typically thousands of times lower than those they can get from wireless phones. Base stations are thus not the subject of the safety questions discussed in this document.

3. What kinds of phones are the subject of this update?


The term 'wireless phone' refers here to handheld wireless phones with built-in antennas, often called 'cell', 'mobile', or 'PCS' phones. These types of wireless phones can expose the user to measurable radiofrequency energy



(RF) because of the short distance between the phone and the user's head. These RF exposures are limited by FCC safety guidelines that were developed with the advice of the FDA and other federal health and safety agencies. When the phone is located at greater distances from the user, the exposure to RF is drastically lower because a person's RF exposure decreases rapidly with increasing distance from the source. The so-called 'cordless phones,' which have a base unit connected to the telephone wiring in a house, typically operate at far lower power levels, and thus produce RF exposures far below the FCC safety limits.

4. What are the results of the research done already?

The research done thus far has produced conflicting results, and many studies have suffered from flaws in their research methods. Animal experiments investigating the effects of radiofrequency energy (RF) exposures characteristic of wireless phones have yielded conflicting results that often cannot be repeated in other laboratories. A few animal studies, however, have suggested that low levels of RF could accelerate the development of cancer in laboratory animals. However, many of the studies that showed increased tumor development used animals that had been genetically engineered or treated with cancer causing chemicals so as to be pre-disposed to develop cancer in the absence of RF exposure. Other studies exposed the animals to RF for up to 22 hours per day. These conditions are not similar to the conditions under which people use wireless phones, so we don't know with certainty what the results of such studies mean for human health. Three large epidemiology studies have been published since December 2000. Between them, the studies investigated any possible association between the use of wireless phones and primary brain cancer, glioma, meningioma, or acoustic neuroma, tumors of the brain or salivary gland, leukemia, or other cancers. None of the studies demonstrated the existence of any harmful health effects from wireless phone RF exposures. However, none of the studies can answer questions about long-term exposures, since the average period of phone use in these studies was around three years.

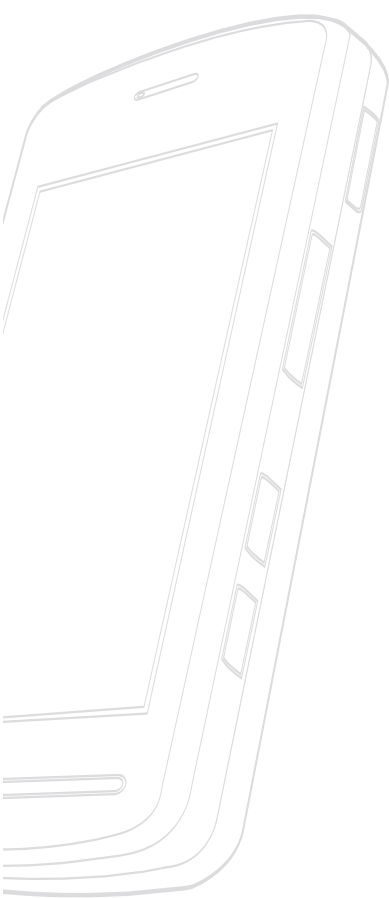


5. What research is needed to decide whether RF exposure from wireless phones poses a health risk?

A combination of laboratory studies and epidemiological studies of people actually using wireless phones would provide some of the data that are needed. Lifetime animal exposure studies could be completed in a few years. However, very large numbers of animals would be needed to provide reliable proof of a cancer promoting effect if one exists. Epidemiological studies can provide data that is directly applicable to human populations, but 10 or more years follow-up may be needed to provide answers about some health effects, such as cancer. This is because the interval between the time of exposure to a cancer-causing agent and the time tumors develop - if they do- may be many, many years. The interpretation of epidemiological studies is hampered by difficulties in measuring actual RF exposure during day-to-day use of wireless phones. Many factors affect this measurement, such as the angle at which the phone is held, or which model of phone is used.

6. What is the FDA doing to find out more about the possible health effects of wireless phone RF?

The FDA is working with the U.S. National Toxicology Program and with groups of investigators around the world to ensure that high priority animal studies are conducted to address important questions about the effects of exposure to radiofrequency energy (RF). The FDA has been a leading participant in the World Health Organization International Electromagnetic Fields (EMF) Project since its inception in 1996. An influential result of this work has been the development of a detailed agenda of research needs that has driven the establishment of new research programs around the world. The project has also helped develop a series of public information documents on EMF issues. The FDA and the Cellular Telecommunications & Internet Association (CTIA) have a formal Cooperative Research and Development Agreement (CRADA) to do research on wireless phone safety. The FDA provides the scientific oversight, obtaining input from experts in government, industry, and academic organizations. CTIA-funded research is conducted through contracts with independent investigators. The initial research will include both laboratory studies and studies of wireless phone

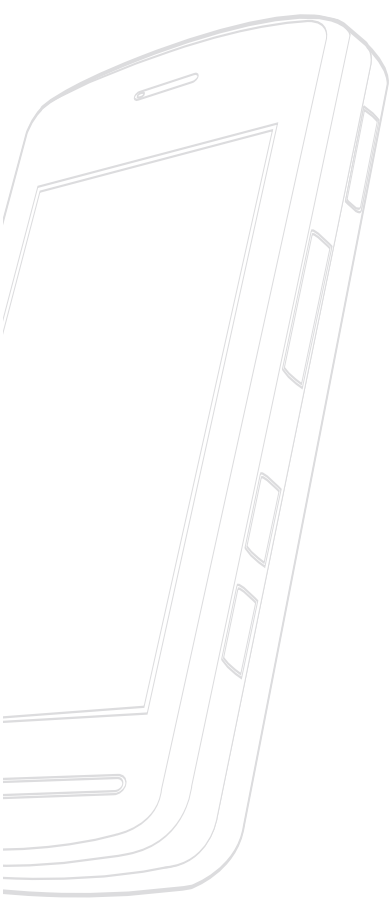

users. The CRADA will also include a broad assessment of additional research needs in the context of the latest research developments around the world.

7. How can I find out how much radio frequency energy exposure I can get by using my wireless phone?

All phones sold in the United States must comply with Federal Communications Commission (FCC) guidelines that limit radio frequency energy (RF) exposures. The FCC established these guidelines in consultation with the FDA and the other federal health and safety agencies. The FCC limit for RF exposure from wireless telephones is set at a Specific Absorption Rate (SAR) of 1.6 watts per kilogram (1.6 W/kg). The FCC limit is consistent with the safety standards developed by the Institute of Electrical and Electronic Engineering (IEEE) and the National Council on Radiation Protection and Measurement. The exposure limit takes into consideration the body's ability to remove heat from the tissues that absorb energy from the wireless phone and is set well below levels known to have effects. Manufacturers of wireless phones must report the RF exposure level for each model of phone to the FCC. The FCC website (<http://www.fcc.gov/oet/rfsafety>) gives directions for locating the FCC identification number on your phone so you can find your phone's RF exposure level in the online listing.

8. What has the FDA done to measure the radio frequency energy coming from wireless phones?

The Institute of Electrical and Electronic Engineers (IEEE) is developing a technical standard for measuring the radio frequency energy (RF) exposure from wireless phones and other wireless handsets with the participation and leadership of FDA scientists and engineers. The standard, 'Recommended Practice for Determining the Spatial- Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques,' sets forth the first consistent test methodology for measuring the rate at which RF is deposited in the heads of wireless phone users. The test method uses a tissuesimulating model of the human head. Standardized SAR test methodology is expected to greatly improve the consistency of measurements made at different laboratories on the same phone. SAR is the measurement of the amount of energy absorbed in tissue, either by the



whole body or a small part of the body. It is measured in watts/kg (or milliwatts/g) of matter. This measurement is used to determine whether a wireless phone complies with safety guidelines.

9. What steps can I take to reduce my exposure to radiofrequency energy from my wireless phone?

If there is a risk from these products - and at this point we do not know that there is - it is probably very small. But if you are concerned about avoiding even potential risks, you can take a few simple steps to minimize your exposure to radiofrequency energy (RF). Since time is a key factor in how much exposure a person receives, reducing the amount of time spent using a wireless phone will reduce RF exposure. If you must conduct extended conversations by wireless phone every day, you could place more distance between your body and the source of the RF, since the exposure level drops off dramatically with distance. For example, you could use a headset and carry the wireless phone away from your body or use a wireless phone connected to a remote antenna. Again, the scientific data do not demonstrate that wireless phones are harmful. But if you are concerned about the RF exposure from these products, you can use measures like those described above to reduce your RF exposure from wireless phone use.

10. What about children using wireless phones?

The scientific evidence does not show a danger to users of wireless phones, including children and teenagers. If you want to take steps to lower exposure to radiofrequency energy (RF), the measures described above would apply to children and teenagers using wireless phones. Reducing the time of wireless phone use and increasing the distance between the user and the RF source will reduce RF exposure. Some groups sponsored by other national governments have advised that children be discouraged from using wireless phones at all. For example, the government in the United Kingdom distributed leaflets containing such a recommendation in December 2000. They noted that no evidence exists that using a wireless phone causes brain tumors or other ill effects. Their recommendation to limit wireless phone use by children was strictly precautionary; it was not based on scientific evidence that any health hazard exists.



11. What about wireless phone interference with medical equipment?

Radio frequency energy (RF) from wireless phones can interact with some electronic devices. For this reason, the FDA helped develop a detailed test method to measure electromagnetic interference (EMI) of implanted cardiac pacemakers and defibrillators from wireless telephones. This test method is now part of a standard sponsored by the Association for the Advancement of Medical instrumentation (AAMI). The final draft, a joint effort by the FDA, medical device manufacturers, and many other groups, was completed in late 2000. This standard will allow manufacturers to ensure that cardiac pacemakers and defibrillators are safe from wireless phone EMI. The FDA has tested hearing aids for interference from handheld wireless phones and helped develop a voluntary standard sponsored by the Institute of Electrical and Electronic Engineers (IEEE). This standard specifies test methods and performance requirements for hearing aids and wireless phones so that no interference occurs when a person uses a 'compatible' phone and a 'compatible' hearing aid at the same time. This standard was approved by the IEEE in 2000. The FDA continues to monitor the use of wireless phones for possible interactions with other medical devices. Should harmful interference be found to occur, the FDA will conduct testing to assess the interference and work to resolve the problem.

12. Where can I find additional information?

For additional information, please refer to the following resources:

FDA web page on wireless phones

(<http://www.fda.gov/cdrh/phones/index.html>)

Federal Communications Commission (FCC) RF Safety Program

(<http://www.fcc.gov/oet/rfsafety>)

International Commission on Non-Ionizing Radiation Protection

(<http://www.icnirp.de>)

World Health Organization (WHO) International EMF Project

(<http://www.icnirp.de>)

National Radiological Protection Board (UK)

(<http://www.nrpb.org.uk>)



Driver Safety Tips

Your wireless phone gives you the powerful ability to communicate by voice almost anywhere, anytime. An important responsibility accompanies the benefits of wireless phones, one that every user must uphold.

When operating a car, driving is your first responsibility.

When using your wireless phone behind the wheel of a car, practice good common sense and remember the following tips:

1. Get to know your wireless phone and its features such as speed dial and redial. Carefully read your instruction manual and learn to take advantage of valuable features most phones offer, including automatic redial and memory. Also, work to memorize the phone keypad so you can use the speed dial function without taking your attention off the road.
2. When available, use a hands-free device. A number of hands-free wireless phone accessories are readily available today. Whether you choose an installed mounted device for your wireless phone or a speaker phone accessory, take advantage of these devices if available to you.
3. Position your wireless phone within easy reach. Make sure you place your wireless phone within easy reach and where you can reach it without removing your eyes from the road. If you get an incoming call at an inconvenient time, if possible, let your voicemail answer it for you.
4. Suspend conversations during hazardous driving conditions or situations. Let the person you are speaking with know you are driving; if necessary, suspend the call in heavy traffic or hazardous weather conditions. Rain, sleet, snow and ice can be hazardous, but so is heavy traffic. As a driver, your first responsibility is to pay attention to the road.
5. Do not take notes or look up phone numbers while driving. If you are reading an address book or business card, or writing a “to-do” list while driving a car, you are not watching where you are going. It is common sense. Don’t get caught in a dangerous situation because you are reading or writing and not paying attention to the road or nearby vehicles.



6. Dial sensibly and assess the traffic; if possible, place calls when you are not moving or before pulling into traffic. Try to plan your calls before you begin your trip or attempt to coincide your calls with times you may be stopped at a stop sign, red light or otherwise stationary. But if you need to dial while driving, follow this simple tip— dial only a few numbers, check the road and your mirrors, then continue.
7. Do not engage in stressful or emotional conversations that may be distracting. Stressful or emotional conversations and driving do not mix; they are distracting and even dangerous when you are behind the wheel of a car. Make people you are talking with aware you are driving and if necessary, suspend conversations which have the potential to divert your attention from the road.
8. Use your wireless phone to call for help. Your wireless phone is one of the greatest tools you can own to protect yourself and your family in dangerous situations — with your phone at your side, help is only three numbers away. Dial 911 or other local emergency number in the case of fire, traffic accident, road hazard or medical emergency. Remember, it is a free call on your wireless phone!
9. Use your wireless phone to help others in emergencies. Your wireless phone provides you a perfect opportunity to be a “Good Samaritan” in your community. If you see an auto accident, crime in progress or other serious emergency where lives are in danger, call 911 or other local emergency number, as you would want others to do for you.
10. Call roadside assistance or a special wireless non-emergency assistance number when necessary. Certain situations you encounter while driving may require attention, but are not urgent enough to merit a call for emergency services. But you can still use your wireless phone to lend a hand. If you see a broken-down vehicle posing no serious hazard, a broken traffic signal, a minor traffic accident where no one appears injured or a vehicle you know to be stolen, call roadside assistance or other special non-emergency wireless number.

For more information, please call to 888-901-SAFE, or visit our website www.wow-com.com



Consumer Information on SAR (Specific Absorption Rate)

This Model Phone Meets the Government's Requirements for Exposure to Radio Waves.

Your wireless phone is a radio transmitter and receiver. It is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission (FCC) of the U.S. Government. These limits are part of comprehensive guidelines and establish permitted levels of RF energy for the general population. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons, regardless of age and health.

The exposure standard for wireless mobile phones employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit set by the FCC is 1.6W/kg. * Tests for SAR are conducted using standard operating positions specified by the FCC with the phone transmitting at its highest certified power level in all tested frequency bands. Although SAR is determined at the highest certified power level, the actual SAR level of the phone while operating can be well below the maximum value. Because the phone is designed to operate at multiple power levels to use only the power required to reach the network, in general, the closer you are to a wireless base station antenna, the lower the power output.

Before a phone model is available for sale to the public, it must be tested and certified to the FCC that it does not exceed the limit established by the government-adopted requirement for safe exposure. The tests are performed in positions and locations (e.g., at the ear and worn on the body) as required by the FCC for each model. The highest SAR value for this model phone when tested for use at the ear is 1.26 W/kg and when worn on the body, as described in this user's manual, is 0.508 W/kg. (Body-worn measurements differ among phones models, depending upon available accessories and FCC requirements.) While there may be differences between SAR levels of various



phones and at various positions, they all meet the government requirement for safe exposure.

The FCC has granted an Equipment Authorization for this model phone with all reported SAR levels evaluated as in compliance with the FCC RF emission guidelines. SAR information on this model phone is on file with the FCC and can be found under the Display Grant section of <http://www.fcc.gov/oet/fccid> after searching on FCC ID BEJCU920.

Additional information on Specific Absorption Rates (SAR) can be found on the Cellular Telecommunications Industry Association (CTIA) website at <http://www.wow-com.com>

* In the United States and Canada, the SAR limit for mobile phones used by the public is 1.6 watts/kg (W/kg) averaged over one gram of tissue. The standard incorporates a substantial margin of safety to give additional protection for the public and to account for any variations in measurements.



Line Identification Services (Caller ID)

Service allowing subscribers to view or block the telephone numbers of callers.

Conference Calls

Ability to establish a conference call involving up to five additional parties.

Phone Password

Security code used to unlock the phone when you have selected the option to lock it automatically each time it switches on.

Roaming

Use of your phone when you are outside your home area (when traveling for example).

SDN (Service Dial Number)

Telephone numbers supplied by your network provider and giving access to special services, such as voice mail, directory inquiries, customer support and emergency services.

SmartChip

Card containing a chip with all the information required to operate the phone (network and memory information, as well as the subscriber's personal data). The SmartChip fits into a small slot on the back of the phone and is protected by the battery.

SMS (Short Message Service)

Network service sending and receiving messages to and from another subscriber without having to speak to the correspondent. The message created or received (up to 160 characters long) can be displayed, received, edited or sent.

Patent Information

This product was manufactured under one or more of the following U.S. patents: 5276765 5749067 6061647



D

Date	93
Display Information	15
Drafts	45
During a Call	26

E

Fixed Dial Number	96
Flight Mode	97

G

GPRS	126
------------	-----

I

IM	49
Inbox	44
Installing the SmartChip	10

L

Languages	92
Lock Handset	95



M

Making a Call	21
Messaging	42
Minute Minder	87
Mobile Email.....	53
My Numbers	40
MusicID	69
Music Videos	70

N

Network Profiles	97
Notepad	82

O

Outbox	45
--------------	----

R

Ringtones	78
-----------------	----

S

Security	58, 95
Security code	13
Service Dial Numbers	40
Shop Games	61
Shop Tones	61
Software Update	98
Speed Dial List	39



S

Stopwatch	83
Shop Music	68

T

Tasks	82
Templates	47
The Buzz	70
Tip Calculator	82
Turning Your Phone On and Off	13

U

Unit Converter	83
----------------------	----

V

Videos	79
Video Share Call	27
Voicemail	46, 49

W

Wallpapers	91
World Clock	82

Bluetooth QD ID B013291