

* Some of the contents of this manual may differ from your phone, depending on the software installed or your service provider.



World Wide Web
<http://www.samsungmobile.com>

Printed in Korea
Code No.:GH68-04637A
English. 12/2003. Rev 1.0



Contents


Important Safety Precautions.....	7
Unpacking	9
Your Phone	10
Phone Layout	10
Display	13
Service Light	16
Camera	17
Flashlight	17
Getting Started	18
Installing the SIM Card	18
Charging the Battery	20
Switching the Phone On or Off	22
Call Functions	23
Making a Call	23
Adjusting the Volume	25
Answering a Call	26
Viewing Missed Calls	27
Quickly Switching to Silent Mode	29
Selecting Functions and Options	30
Contacts	32
Storing a Number with a Name	32
Using Contacts Entry Options	35
Searching for and Dialling a Number in Contacts	37
Editing a Caller Group	39
Speed-dialling	40
Deleting All of the Contacts Entries	42
Checking the Memory Status	43
Using the Service Dialling Numbers	44
Entering Text	45
Changing the Text Input Mode	46
Using Alphabet Mode	47
Using Number Mode	48
Using Symbol Mode	48
Using T9 Mode	49

Options During a Call	51
Putting a Call on Hold	51
Using the Menu Functions	52
Switching the Microphone Off (Mute)	53
Muting and Sending DTMF Tones	54
Sending a Sequence of DTMF tones	54
Searching for a Number in Contacts	55
Call Waiting	56
Making a Multi-party Call	56
Using the Menus	59
Accessing a Menu Function by Scrolling	59
Using Shortcuts	60
List of Menu Functions	61
Messages	67
Picture messages	67
Text messages	78
MMS postcard	84
Album	86
Vodafone Mail	87
Vodafone Messenger	87
Push message	87
Delete all	88
Voice mail	89
Broadcast	90
Memory status	91
Settings	91
Call log	96
Missed calls	96
Received calls	97
Dialled calls	97
Delete all	98
Call time	99
Call costs	100
Camera	101
Taking a photo	101
Take photos	105
My photos	105
Video	106
Memory status	108

Sound settings	109
Ringtone	109
Ring volume	110
Alert type	110
Keypad tone	110
Message tone	111
Folder tone	112
Power on/off	112
Extra tones	113
Phone settings	114
Activate infrared	114
Display settings	115
Greeting message	118
Own number	118
Language	119
Security	119
Extra settings	123
Short cut	124
Reset settings	124
Organiser	125
Alarm	125
Calendar	127
Time & date	129
Calculator	131
To do list	132
Voice memo	135
Currency exchange	137
Network services	138
Call diverting	138
Call barring	140
Call waiting	142
Network selection	143
Caller ID	144
Closed user group (CUG)	144
Vodafone live!	147
Browser	147
My stuff	151
Favourites	157
Clear cache	158
WAP profile	158

Contents

Solving Problems.....	160
Access Codes	163
Phone Password	163
PIN	164
PUK	164
PIN2	165
PUK2	165
Barring Password.....	166
Health and Safety Information	167
Exposure to Radio-Frequency Energy (SAR Information)	167
Precautions When Using Batteries	168
Road Safety	170
Operating Environment.....	172
Electronic Devices.....	172
Potentially Explosive Environments	174
Emergency Calls	175
Other Important Safety Information	176
Care and Maintenance	177
Glossary	179
Index.....	184
Quick Reference Card	189



Important Safety Precautions

Read these guidelines before using your wireless phone. Failure to comply with them may be dangerous or illegal.

Road Safety at All Times

Do not use a hand-held phone while driving; park the vehicle first.

Switching Off When Refuelling

Do not use the phone at a refuelling point (service station) or near fuels or chemicals.

Switching Off in an Aircraft

Wireless phones can cause interference. Using them in an aircraft is both illegal and dangerous.

Switching Off in Hospitals

Switch your phone off near medical equipment. Follow any regulations or rules in force.

Interference

All wireless phones may be subject to interference, which could affect their performance.

Special Regulations

Meet any special regulations in force in any area and always switch off your phone whenever it is forbidden to use it, or when it may cause interference or danger (in a hospital for example).

Important Safety Precautions

Sensible Use

Use only in the normal position (held to the ear). Avoid unnecessary contact with the antenna when the phone is switched on.

Emergency Call

Ensure the phone is switched on and in service. Key in the emergency number for your present location, then press the  key. You must deactivate any unnecessary features before you can make an emergency call. Give all the necessary information as accurately as possible. Do not cut off the call until given permission to do so.

Water Resistance

Your phone is not water-resistant. Keep it dry.

Accessories and Batteries

Use only Samsung-approved accessories and batteries. Use of any unauthorised accessories could damage your phone and may be dangerous.

Qualified Service

Only qualified service personnel may repair your phone.


For more detailed safety information, see "Health and Safety Information" on page 167.

Unpacking

Your package contains the following items:



Handset



Travel Adapter



Batteries



Ear-microphone



User's Manual



Hand Strap


Note: The items supplied with your phone may be different, depending upon your country or service provider.

You can obtain the following accessories for your phone from your local Samsung dealer:

- Standard batteries
- Simple hands-free kit
- Cigarette lighter adapter
- Travel charger/adapter
- Data cable
- Ear-microphone
- Car holder
- Leather case
- Battery charger
- Software CD-ROM

Phone Layout

The following illustrations show the main elements of your phone:

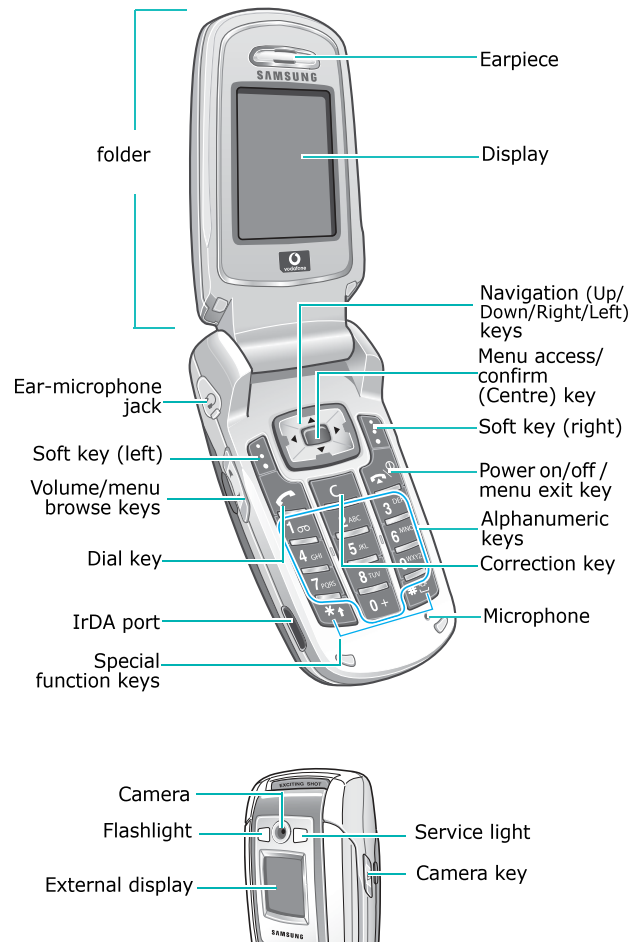


Key(s)	Description
	In Menu mode, scroll through the menu options and Contacts. In Idle mode, allow you to access your favourite menu options directly. For more information about shortcuts, see page 124.
	When entering text, move the cursor to the left and right respectively. In Idle mode, allow you to access your favourite menu options directly. For more information about shortcuts, see page 124.
 (soft keys)	Perform the functions indicated by the text above them, on the bottom line of the display.
	In Idle mode, enters Menu mode. In Menu mode, selects the current menu or option or confirms your input.
	Makes or answers a call. In Idle mode, recalls the last number you dialled or received when held down.
	Deletes characters from the display.

Key(s)	Description (continued)
	Ends a call. Also switches the phone on and off when held down. In Menu mode, cancels your input and returns to Idle mode.
	In Idle mode, accesses your voice mail when held down.
	Enter numbers, letters and some special characters.
	Enter special characters. Perform various functions.
	(on the left side of the phone) During a call, adjust the earpiece volume. In Idle mode with the folder open, adjust the ringer volume. With the folder closed, turns the flash on when held down. In Menu mode, scroll through the menu options and Contacts.
	(on the right side of the phone) In Idle mode, turns the camera on when held down to allow you to take photos.

Display

Display Layout

The display has three areas:

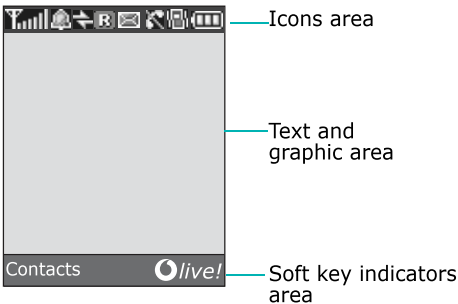

Area	Description
First line	Displays various icons. See page 14.
Middle lines	Displays messages, instructions and any information that you enter, such as the number you are dialling.
Last line	Shows the current functions assigned to the two soft keys.

Icons

Icon	Description
	Shows the received signal strength. The greater the number of bars, the stronger the signal.
	Appears when you set an alarm to ring at a specified time.
	Appears when the IrDA port is active. For details, see page 114.
	Appears when you are out of your home area and have logged onto a different network; for example, when travelling in other countries.
	Appears when a new text message has been received.
	Appears when a new voice mail message has been received.
	Appears when a new multimedia message has been received.
	Appears when a call is in progress.
	Appears when you are out of your service area. When it displays, you cannot make or receive a call.
	Appears when you are connected to the GPRS network.

Icon Description (continued)

	Appears when Silent mode is active or when you set the Alert type menu so that the phone vibrates when you receive a call. For further details, see page 29 and page 110 respectively.
	Appears when Mute mode is active.
	Shows the level of your battery. The more bars you see, the more power you have remaining.

Backlight

The backlight illuminates the display and the keypad. When you press any key or open the folder, the backlight turns on and remains on for a given period of time, depending on your setting in the **Back light** menu. When no keys are pressed, the display turns off after one minute to conserve your battery power.

To specify the length of time the backlight is active, set the **Back light** menu. See page 116 for further details.

External Display

Your phone has an external display on the folder. It indicates when you have an incoming call or message. It also alerts you at the specified time when you have set an alarm by displaying the corresponding icon.


When you close the folder, the display shows the current time on both a digital clock and an analogue clock. You can set the display to show the current date instead of the analogue clock using the **Front LCD display** menu. You can also select how long the date or analogue clock displays. For details, see page 117.

With the folder closed, you can take photos using the external display by pressing the Camera key on the right side of the phone. See page 101.

Service Light

The service light is on the folder. It flashes when services are available on the phone.

To activate or deactivate the service light, set the **Service light** menu. See page 116 for further details.

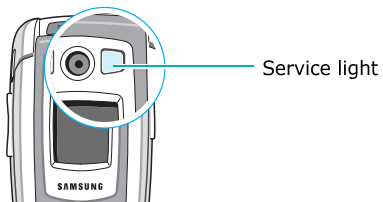

Camera

The camera on the folder allows you to take a photo or record a video while on the move.

For further details about the Camera feature, see page 101.

Flashlight

You can use the built-in flashlight on the folder, on the left side of the camera, to view the external display or to take photos when it is dark. You can also use the flash in emergency conditions.

Press and hold one of the Volume keys to turn the flashlight on.

Getting Started

Getting Started


Installing the SIM Card

When you subscribe to a cellular network, you are provided with a plug-in SIM card loaded with your subscription details, such as your PIN, any optional services available and so on.

Important! The plug-in SIM card and its contacts can be easily damaged by scratches or bending, so be careful when handling, inserting or removing the card.


Keep all SIM cards out of the reach of small children.

1. If necessary, switch off the phone by holding down the  key until the power-off image displays.
2. Remove the battery. To do so:
 - ① Slide the battery lock towards the top of the phone.
 - ② Lift the battery away, as shown.




3. Slide the SIM card into the SIM card socket, as shown, so that it locks the card into position.


Make sure the gold contacts of the card face into the phone.




Note: When you need to remove the SIM card, slide it upwards, as shown, and take it out of the socket.



4. Place the battery so that the tabs on the end align with the slots at the bottom of the phone.



5. Press the battery until it clicks into place. Make sure that the battery is properly installed before switching the power on.




Charging the Battery

Your phone is powered by a rechargeable Li-ion battery. A travel adapter comes with your phone for charging the battery. Use only approved batteries and chargers. Ask your local Samsung dealer for further details.


The travel adapter allows you to use the phone while the battery is charging, but this causes the phone to charge more slowly.

Note: You must fully charge the battery before using your phone for the first time. A discharged battery is fully recharged in approximately 200 minutes.

1. With the battery in position on the phone, plug the connector of the travel adapter into the jack at the bottom of the phone.

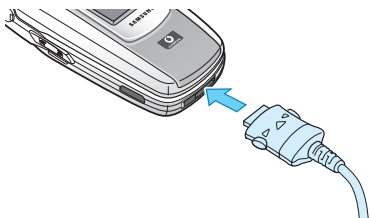

2. Plug the adapter into a standard AC wall outlet.
3. When charging is finished, unplug the adapter from the power outlet and disconnect it from the phone by pressing the grey tabs on both sides of the connector and pulling the connector out.



Note: You must unplug the adapter before removing the battery from the phone during charging; otherwise, the phone could be damaged.

Low Battery Indicator


When the battery is weak and only a few minutes of talk time remain, a warning tone sounds and a message repeats at regular intervals on the display. When this happens, your phone turns off the backlight to conserve the remaining battery power.

When the battery level becomes too low, the phone automatically turns off.

Switching the Phone On or Off

1. Open the folder.
2. Press and hold the  key until the phone switches on.
3. If the phone asks you to enter a password, enter the password and press the Centre key. The phone password is preset to "00000000" at the factory. For further details, see page 163.
4. If the phone asks for a PIN, enter the PIN and press the Centre key or **Ok** soft key. For further details, see page 164.

The phone searches for your network and, after finding it, the idle screen appears on the display, as illustrated below. Now, you can make or receive a call.



Note: The display language is preset to English at the factory. To change the language, use the **Language** menu. For further details, see page 119.

5. When you wish to switch the phone off, hold down the  key until the power-off image displays.

Call Functions

Making a Call

When the idle screen displays, enter the area code and phone number, then press the  key.

Note: When you activate the **Auto redial** option in the **Extra settings** menu, the phone automatically redials up to ten times if the person does not answer the call or is already on the phone. See page 123 for further details.

Making an International Call

1. Press and hold the **0** key. The **+** character appears.
2. Enter the country code, area code and phone number and press the  key.

Correcting the Number

To clear	Press the
the last digit displayed	C key.
any other digit in the number	Left or Right key until the cursor is immediately to the right of the digit to be cleared. Press the C key. You can also insert a missing digit simply by pressing the appropriate key.
the whole display	C key and hold it for more than one second.

Ending a Call

When you want to end your call, briefly press the  key or close the folder.

Redialling the Last Number

The phone stores the numbers you’ve dialled, received or missed if the caller is identified. See “Call log” on page 96 for further details.

To recall any of these numbers:

- 1. If you have typed characters on the display, press the  key to return to Idle mode.
- 2. Press the  key to display a list of the last numbers in the order you made or received them.
- 3. Use the Up and Down keys to scroll through the numbers until the number you want highlights.

4. To	Press the
dial the number	 key.
edit the number	Centre key, or press the Options soft key and select Edit . Change the number, referring to “Correcting the Number” on page 23.
delete the number	Options soft key and select Delete .
delete all of the numbers on the Call log list	Options soft key and select Delete all . For details, see page 98.


Making a Call from Contacts

You can store the phone numbers that you use regularly in the SIM card or the phone’s memory, which are collectively called Contacts. Simply select a name to recall the associated number. For further details about the Contacts features, see page 32.

Adjusting the Volume

During a call, if you want to adjust the earpiece volume, use the Volume keys on the left side of the phone.

Press the  key to increase the volume level and the  key to decrease the level.

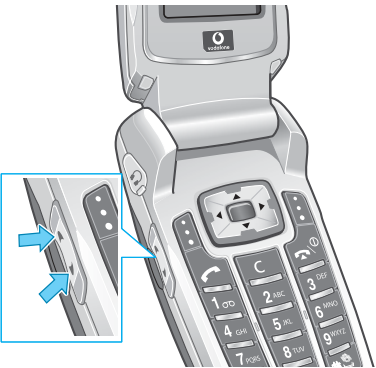

In Idle mode with the folder open, you can also adjust the keypad tone volume using these keys.

Answering a Call

When somebody calls you, the phone rings and displays the incoming call image.

When the caller can be identified, the caller's phone number or name, if stored in your Contacts, displays.

1. If necessary, open the folder. Press the  key or the **Accept** soft key to answer the incoming call.

When the **Anykey answer** option in the **Extra settings** menu is activated, you can press any key to answer a call except for the [Ⓢ] key and the **Reject** soft key. See page 123.

When the **Active folder** option in the **Extra settings** menu is activated, you can answer the call simply by opening the folder. See page 123.

Note: To reject the call, press and hold the Volume keys before opening the folder, or press the **Reject** soft key or [Ⓢ] key.

2. End the call by closing the folder or pressing the [Ⓢ] key.

Note: You can answer a call while using Contacts or menu features. After ending the call, the display returns to the function screen you were using.

Viewing Missed Calls

When you are unable to answer a call for any reason, you can find out who is calling you so that you can call the person back.

The number of calls you missed displays on the idle screen immediately after a call is missed.

To view the missed call immediately:

1. If the phone is closed, open the folder.
2. Press the Centre soft key.

The number for the most recent missed call displays, if available.

3. To	Press the
scroll through the missed calls	Up or Down key.
call the number displayed	 key.
edit or delete a missed call number	Centre key or Select soft key. See below.

Editing a Missed Call Number

Note: When the number for the missed call is not available, the **Edit** option does not display.

1. Press the Centre key.

You can also press the **Options** soft key and then select the **Edit** option using the Up or Down key.
2. Press the Centre key or **Select** soft key.

3. Change the number.

4. To	Press the
call the number	 key.
store the number	Centre key or Save soft key and enter the name and location. For further details, see page 32.

Deleting a Missed Call

1. Press the **Options** soft key.
2. If necessary, press the Up or Down key to highlight the **Delete** option.
3. Press the Centre key or **Select** soft key.

You can press the  key at any time to exit the Missed Call feature.

Note: You can access the Missed Call feature at any time by selecting the **Missed calls** menu. For further details, see page 96.

Quickly Switching to Silent Mode

Silent mode is convenient when you wish to stop the phone from making noise, in a theatre for example.

In Idle mode, press and hold the **#** key until the "Silent mode" message and the Vibration icon () display. The phone also vibrates.

In Silent mode, your phone changes the sound settings as follows:

Option	New Setting
Alert type	Vibration
Keypad tone	Off
Message tone	Light + Vibration
Folder tone	Off
Power off tone	Off
Extra tones	Off

To exit and reactivate the previous sound settings, press and hold the **#** key again until "Exit silent mode" appears. The Vibration icon () no longer displays.


Note: When you turn the phone off, Silent mode is automatically deactivated.

Selecting Functions and Options

Your phone offers a set of functions that allow you to customise it. These functions are arranged in menus and sub-menus, accessed using the two soft keys marked  and . Each menu and sub-menu allows you to view and alter the settings of a particular function.

The roles of the soft keys vary according to the function you are currently using; the labels on the bottom line of the display just above each key indicates its current role.

Example:

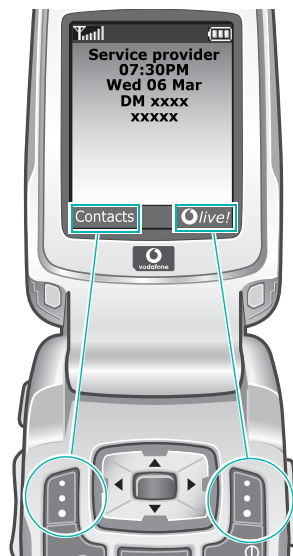

Press the left soft key to access the Contacts feature.

Press the right soft key to launch the WAP (Wireless Application Protocol) browser.

Selecting Functions and Options

To view the various functions and options available and to select the one you want:

1. Press the appropriate soft key.

To	Press the
select the: - function displayed - option highlighted	Centre key or Select soft key.
view the next function or highlight the next option on a list	Down key or ▼ key on the left side of the phone.
move back to the previous function or option on a list	Up key or ▲ key on the left side of the phone.
move back up one level in the structure	Back soft key. When the Back soft key is not available, press the C key.
exit the structure without changing the settings	 key.

In some functions, you may be asked for a password or PIN. Enter the code and press the Centre key or **Ok** soft key.

Note: When you access a list of options, your phone highlights the current option. If, however, there are only two options, such as **On/Off** or **Enable/Disable**, your phone highlights the option that is not currently active so that you can select it directly.



Contacts

You can store phone numbers and their corresponding names in both your SIM card and your phone's memories. They are physically separate but are used as a single entity, called Contacts.

Storing a Number with a Name

There are two ways to store a number:

- Using the Centre key or **Save** soft key in Idle mode
- Using the **Add contact** option in the **Contacts** menu

Storing a Number in Idle mode

1. Enter the number you want to store.

Note: If you make a mistake while entering a number, correct it using the **C** key. For further details, see page 23.

2. When you are sure that it is correct, press the Centre key or **Save** soft key.

3. Select an icon to identify the category of the number to be stored. Three categories are available:

-  : Mobile phone number
-  : Office number
-  : Home number

To select the category, press the Left or Right key and press the Centre key or **Select** soft key.

4. Select a memory location, either **SIM** or **Phone**, by pressing the Up or Down key and press the Centre key or **Select** soft key.

Note: When you change phones, any numbers stored in your SIM card memory are automatically available with the new phone, whereas any numbers stored in the phone's memory must be reentered.

5. Enter a name and press the Centre key or **Ok** soft key.

For further details about how to enter characters, see page 45.

6. If you do not want to save the number and name in the suggested location, press the **C** key to clear the location number and enter another location by pressing the number keys.

7. Press the Centre key or **Ok** soft key to store the name and number.

After storing, the phone displays the Contacts entry or name you just created.

To	Press the
use the entry options	Options soft key. For further details, see page 35.
change the number	Centre key.
return to the idle screen	 key.

Storing a Number Using the Contacts Menu

1. When the idle screen displays, press the **Contacts** soft key.
2. Scroll to **Add contact** by pressing the Up or Down key and press the Centre key or **Select** soft key.
3. Select an icon to identify the category of the number to be stored by pressing the Left or Right key, and press the Centre key or **Select** soft key.

Note: The E-mail icon (✉) is available in this step. It allows you to save an e-mail address instead of a phone number.
4. Select a memory location, either **SIM** or **Phone**, by pressing the Up or Down key and press the Centre key or **Select** soft key.

Note: When you are saving an e-mail address, SIM is not available.
5. Enter a name and press the Centre key or **Ok** soft key.

For further details about how to enter characters, see page 45.
6. Enter the number or address you want to store and press the Centre key or **Save** soft key.
7. Continue the procedure from step 6 on page 33 to store the number.

Using Contacts Entry Options

While accessing any Contacts entry, press the **Options** soft key to access the options for the entry.

To	Press the
select the highlighted option	Centre key or Select soft key.
highlight a different option	Up or Down key until the option you want highlights.

The following options are available:

Paste: allows you to paste the number into the normal dialling mode. Use this option to dial a number similar to one in Contacts, such as a different extension in the same office.

Use the **C** key to change the number as required; see page 23 for further details. When you are ready to dial, press the  key.

Edit: allows you to edit the name and number.

Select **One entry** to change the name and/or phone number for the selected entry. If you change the name, the number is saved separately with the new name.

Select **All entry** to change only the name of the entry.

Photo caller ID: allows you to assign one of the photos you took using the camera as a caller ID image to be displayed when you receive a call from the selected number. For details about the Camera feature, see page 101.

Take photos: allows you to take a new photo to be used as a caller ID.

Select a photo: allows you to select a photo for the number.

View: displays the photo assigned to the number.

Delete caller ID: cancels the photo caller ID setting for the number.

Delete: allows you to delete the name and number from Contacts. You are asked to confirm that you wish to delete the name and number by pressing the Centre key or **Yes** soft key.

Copy: allows you to copy the number to another location. You can select the memory and the location number.

Caller group: allows you to organise your Contacts entries in caller groups so that the phone alerts you in a specific way when a person from one of your groups calls you. Select one of the ten groups available.

To remove an entry from a group, select the **No group** option.

For further details about how to change caller group properties, see page 39.

Add contact: allows you to add a new number to the currently selected name.

MMS postcard: allows you to send a photo to the selected number as a postcard. For details, see page 84.

Searching for and Dialling a Number in Contacts

After storing numbers in Contacts, you can search for them in two ways; by name and by caller group.

Searching for a Number by Name

1. When the idle screen displays, press the **Contacts** soft key.
2. Press the Centre key or **Select** soft key when **Search** highlights. You are asked to enter a name.
3. Enter the first few letters of the name that you want to find.

The Contacts entries are listed, starting with the first entry matching your input.

4. To	Press the
view the highlighted entry	Centre key or View soft key.
select a different entry	Up or Down key until the entry highlights.
look for a name starting with a different letter	key labelled with the letter you want.

5. Once you have found the entry, press the  key to dial the number, or press the **Options** soft key to access the Contacts entry options; for further details, see page 35.

Searching for a Number by Caller Group

1. When the idle screen displays, press the **Contacts** soft key.
2. Scroll to **Group search** by pressing the Up or Down key and press the Centre key or **Select** soft key. You are asked to enter a group name.
3. Enter the first few letters of the group name that you want to find.

The caller groups are listed, starting with the first group matching your input.

4. If necessary, scroll to a group by pressing the Up or Down key and press the Centre key or **View** soft key.

The Contacts entries in the caller group are listed.

5. To	Press the
view the highlighted entry	Centre key or View soft key.
select a different entry	Up or Down key until the entry you want highlights.

6. Once you have found the entry, press the  key to dial the number, or press the **Options** soft key to access the Contacts entry options; for further details, see page 35.

Editing a Caller Group

1. When the idle screen displays, press the **Contacts** soft key.
2. Scroll to **Group edit** by pressing the Up or Down key and press the Centre key or **Select** soft key.
3. Scroll through the group list by pressing the Up or Down key.
4. When the group you want highlights, press the **Options** soft key.
5. Select each option and change the settings, as required. The following options are available:
 - **Call ringtone**: allows you to set a ring tone to be used when you receive a call from a person in the group.
 - **SMS tone**: allows you to set a ring tone to be used when you receive a message from a person in the group.
 - **Graphic**: allows you to set a graphic icon to be displayed when you receive a call from a person in the group.
 - **Group name**: allows you to assign a name to the group. For further details about how to enter characters, see page 45.
6. When you are finished, press the **Back** soft key or  key.

Speed-dialling

Once you have stored phone numbers in Contacts, you can set up to eight speed-dial entries and then dial them easily whenever you want, simply by pressing the associated number key.

Setting Up Speed-dial Entries

1. When the idle screen displays, press the **Contacts** soft key.
2. Scroll to **Speed dial** by pressing the Up or Down key and press the Centre key.
3. Select the key to which you wish to assign the speed-dialling number, from the **2** to **9** keys, and press the **Select** soft key.

Note: Memory location 1 is reserved for your Voice Mail server number.

If you have already assigned a number to the key, the **Options** soft key replaces the **Select** soft key. Go to step 6.

4. Select a Contacts entry from the list and press the Centre key or **View** soft key.
5. Select a number, if the entry has more than one, by pressing the Up or Down key and press the Centre key or **Select** soft key.

6. Once you have assigned a number to the key, you can use the following options by pressing the **Options** soft key:
 - **Change:** allows you to assign a different number to the key.
 - **Delete:** allows you to clear the setting so that no number is assigned to the key.
 - **Delete all:** allows you to clear the settings for all keys so that no numbers are assigned to any of the keys.
 - **Number:** allows you to view the number assigned to the key. You can dial the number by pressing the  key.
7. When you are finished, press the **Back** soft key or  key.

Speed-dialling from Contacts

To speed-dial the numbers assigned to the **2** to **9** keys, press and hold the appropriate key.

Deleting All of the Contacts Entries

You can delete all of entries in the selected memory or both memories.

1. When the idle screen displays, press the **Contacts** soft key.
2. Scroll to **Delete all** by pressing the Up or Down key and press the Centre key or **Select** soft key.
3. To place a check mark by the memory you want to empty, **All**, **SIM** or **Phone**, press the **Mark** soft key.

You can remove the check mark by pressing the **Unmark** soft key.

4. When you are finished marking, press the Centre key to delete the entries in the selected memory.
5. Enter the phone password and press the Centre key or **Ok** soft key.

Note: The password is preset to "00000000" at the factory. To change it, see page 121.

6. When the confirming message appears, press the Centre key or **Yes** soft key.

To cancel the deletion, press the **No** soft key.

7. When the display confirms again, press the Centre key or **Yes** soft key.
8. When you are finished, press the **Back** soft key or  key.

Checking the Memory Status

You can check how many names and numbers are stored in Contacts, in both the SIM card and phone memories. You can also see the capacity of both memories.

1. When the idle screen displays, press the **Contacts** soft key.
2. Select the **Memory status** option by pressing the Up or Down key and press the Centre key or **Select** soft key.
3. Press the Up or Down key to view the number of existing and remaining entries available in the SIM card and phone's memory.
4. When you are finished, press the **Back** soft key or  key.

Using the Service Dialling Numbers

You can view the list of Service Dialling Numbers (SDN) assigned by your network provider. These numbers include emergency numbers, directory enquiries and voice mail numbers.

1. When the idle screen displays, press the **Contacts** soft key.
2. Select the **SDN** option by pressing the Up or Down key and press the Centre key or **Select** soft key.
3. Scroll through the numbers by using the Up or Down key.
4. To dial the number displayed, press the **Dial** soft key.

Note: This option is available only when your SIM card supports Service Dialling Numbers.

Entering Text

When using your phone, you will often need to enter text, such as when storing a name in Contacts, creating your personal greeting or scheduling events on your calendar. You can enter alphanumeric characters by using your phone's keypad.

Your phone has the following text input modes:

- **Alphabet mode**

This mode allows you to enter letters by pressing the key labelled with the letter you want. Press the key once, twice, three or four times until it displays.

- **Number mode**

This mode allows you to enter numbers.

- **Symbol mode**

This mode allows you to enter various symbols and special characters.


- **T9 mode**

This mode allows you to enter words with only one keystroke per letter. Each key on the keypad has more than one letter; for example, when you press the **5** key once, J, K or L displays. T9 mode automatically compares your keystrokes with an internal linguistic dictionary to determine the correct word, thus requiring far fewer keystrokes than the traditional Alphabet mode.

Changing the Text Input Mode

When you are in a field that allows characters to be entered, you will notice the text input mode indicator on the display.

Example: Writing a text message

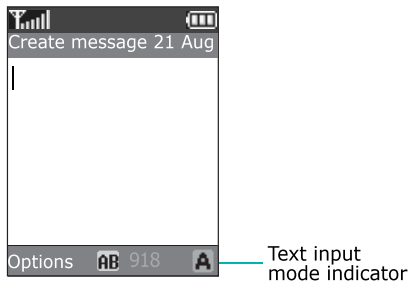

To select	Press the right soft key until
Alphabet mode	A displays. See page 47.
Number mode	1 displays. See page 48.
Symbol mode	the symbol list displays. See page 48.
T9 mode	T9 displays. See page 49.

Notes:

- You can quickly switch to Symbol mode by pressing and holding the ***** key in any mode.
- Additional text input modes may be available, depending upon your country.

Using Alphabet Mode

Use the **1** to **0** keys to enter your text.

1. Press the keys labelled with the letter you want:
 - Once for the first letter
 - Twice for the second letter
 - And so on
2. Select the other letters in the same way.

Note: The cursor moves to the right when you press a different key. When entering the same letter twice or a different letter on the same key, just wait for a few seconds for the cursor to move to the right automatically, and then select the next letter.

Refer to the table below for further details about the characters available:

Key	Characters in the Order Displayed	
	Upper Case	Lower Case
1	. , - ? ! @ : () / 1	. , - ? ! @ : () / 1
2	A B C 2 Ä Å Æ Ç Æ	a b c 2 a ä å æ Æ
3	D E F 3 É Δ Φ	d e f 3 è é Φ
4	G H I 4 Θ Ψ	g h i 4 ì Ψ
5	J K L 5 Λ	j k l 5 Λ
6	M N O 6 Ñ Ø Ö ö	m n o 6 ñ ø ò ö
7	P Q R S 7 Π Σ Ξ	p q r s 7 β Σ Ξ
8	T U V 8 Ü ü	t u v 8 ù ü
9	W X Y Z 9 Ω	w x y z 9 Ω
0	Space +=<>€£\$%&¥¤0	Space +=<>€£\$%&¥¤0

Note: The characters available in Alphabet mode may be different, depending upon your country.

- To insert a space, press the **#** key.
- To shift the case in Alphabet mode, use the ***** key. There are three cases; Initial capital (**Ab**), Capital lock (**AB**) and Lower case (**ab**).
- You can move the cursor using the Left and Right keys. To delete letters, press the **C** key. Press and hold the **C** key to clear the display.

Using Number Mode

Number mode enables you to enter numbers into a text message. Press the keys corresponding to the digits you want to enter.

Using Symbol Mode

Symbol mode enables you to insert symbols into a text message.

To	Press the
select a symbol	corresponding number key.
display more symbols	Up or Down key.
insert the symbol(s) into your message	Centre key or Ok soft key.
clear the symbol(s) you entered	C key.
exit Symbol mode	Back soft key.

Using T9 Mode

T9 is a predictive text input mode that allows you to key in any character using single keystrokes. This text input mode is based on a built-in dictionary.

To enter a word in T9 mode:

1. When you are in T9 mode, start entering a word by pressing the **2** to **9** keys. Press each key only once for each letter.

Example: To enter "Hello" in T9 mode, press the **4, 3, 5, 5** and **6** keys.

The word that you are typing appears on the display. It may change with each key that you press.

2. Enter the whole word before editing or deleting the keystrokes.
3. When the word displays correctly, go to step 4.

If not, press the **0** key, or the Up or Down key repeatedly to display alternative word choices for the keys that you have pressed.

Example: Both "Of" and "Me" use the **6** and **3** keys. The phone displays the most commonly used choice first.

4. Put a space by pressing the **#** key and start entering the next word.

Entering Text

To add a new word into the T9 dictionary:

1. After pressing the keys corresponding to the word you want to add, press the **0** or Down key to display the alternative words.
2. When you press the **0** or Down key at the last alternative word, the display shows **Add** on the bottom line. Press the **Add** soft key.
3. If necessary, clear the word using the **C** key and enter the word you want to add using Alphabet mode; see page 47.
4. Press the **Ok** soft key.

The word is added to the T9 dictionary and becomes the first word for the associated keypress.


Note: This feature may not be available for some languages.

- To enter periods, hyphens or apostrophes, press the **1** key. T9 mode applies grammar rules to ensure that the correct punctuation is used.

Example: The **1** key is used twice to display two punctuation marks:



- To shift the case in T9 mode, use the **✖** key. There are three cases; Initial capital (**Ab**), Capital lock (**AB**) and Lower case (**ab**).
- You can move the cursor by using the Left and Right keys. To delete letters, press the **C** key. Press and hold the **C** key to clear the display.



Options During a Call

Your phone provides a number of control functions that you can use during a call.

Putting a Call on Hold

You can place the current call on hold whenever you want. You can make another call while you have a call in progress if your network supports this service.

To place a call on hold, simply press the **Hold** soft key. You can reactivate the call whenever you want, by pressing the **Unhold** soft key.

To make a call while you have a call in progress:

1. Enter the phone number that you wish to dial or look it up in Contacts.

For details about searching for a number in Contacts, see page 37.

2. Press the  key to dial the second call.

The first call is automatically put on hold.

Or,

1. Put the current call on hold by pressing the **Hold** soft key.
2. Make the second call in the normal way.

When you have an active call and a call on hold, you may switch between the two calls, changing the one on hold to active and placing the other on hold.

To switch between the two calls, simply press the **Swap** soft key.

The current call is placed on hold and the call on hold is reactivated so that you can continue conversing with the other person.

When you want to finish, end each call normally by pressing the  key.

Using the Menu Functions

During a call, you can access the main menu functions.

1. Press the Centre key.

You can also press the **Options** soft key and then press the Centre key or **Ok** soft key when the **Menu** option highlights.

2. Press the Up or Down key to scroll through the menu list.

Note: You cannot use some menus during a call. They are deactivated on this list.

3. When the menu you want highlights, press the Centre key or **Select** soft key.
4. If the selected menu has sub-options, repeat steps 3 and 4.

For further details about the menu functions available, see the list on page 61.

Switching the Microphone Off (Mute)

You can temporarily switch your phone's microphone off so that the other person on the phone cannot hear you.

Example: You wish to say something to another person in the room but do not want the person on the phone to hear you.

To switch the microphone off temporarily:

1. Press the **Options** soft key.
2. Press the Down key to highlight the **Mute** option.
3. Press the Centre key or **Ok** soft key.

The other person can no longer hear you.

To switch the microphone back on:

1. Press the **Options** soft key.
2. If necessary, press the Down key to highlight the **Unmute** option.
3. Press the Centre key or **Ok** soft key.

The other person can hear you again.

Muting and Sending DTMF Tones

These options allow you to turn the key tones off or on. If the **Mute keys** option is selected, your phone does not transmit the DTMF (Dual Tone Multi-Frequency) tones of the keys, which allows you to press keys without hearing annoying key tones during a call.

Note: To communicate with answering machines or computerised telephone systems, the **Send keys** option must be selected.

Sending a Sequence of DTMF tones

You can send the DTMF tones after entering the entire number you need to send.

This option is helpful for entering a password or an account number when you call an automated system, like a banking service.

To send the DTMF tones:

1. When you are connected to the teleservice system, press the **Options** soft key.
2. Press the Down key to highlight the **Send DTMF** option.
3. Press the Centre key or **Ok** soft key.
4. Enter the number you want to send and press the Centre key.

The tones are sent.

Searching for a Number in Contacts

You can search for a number in Contacts during a call.

1. Press the **Options** soft key.
2. Press the Down key to highlight the **Contacts** option.
3. Press the Centre key or **Ok** soft key.
The Contacts entries are listed.

4. Enter the name that you wish to find.

If you enter the first few letters of the name, the Contacts entries are listed, starting with the first entry matching your input.

5. To view the highlighted entry, press the Centre key or **View** soft key.

For further details about the Contacts feature, see page 32.

Call Waiting

You can answer an incoming call while you have a call in progress, if your network supports this service and you have set the **Call waiting** menu to **Activate**; see page 142. You are notified of an incoming call by a call waiting tone.

To answer a call while you have a call in progress:

1. Press the  key to answer the incoming call. The first call is automatically put on hold.
2. To switch between the two calls, press the **Swap** soft key.
3. To end the call on hold, press the **Options** soft key and select the **End held call** option.

To end the current call, press the  key.

Making a Multi-party Call

A multi-party call is a network service that allows up to six people to take part simultaneously in a multi-party or conference call. For more information about subscribing to this service, contact your service provider.

Setting up the Multi-party Call

1. Call the first participant in the normal way.
2. Call the second participant in the normal way. The first call is automatically put on hold.

3. To join the first participant to the multi-party call, press the **Options** soft key and select the **Join** option. Press the Centre key or **Ok** soft key.
4. To add a new person to the multi-party call, call the person in the normal way and press the **Options** soft key. Select the **Join** option and press the Centre key or **Ok** soft key.

You can add incoming callers by answering the call, pressing the **Options** soft key, and selecting the **Join** option. Repeat as required.

Having a Private Conversation With One Participant

1. Press the **Options** soft key and choose the **Select one** option. Press the Centre key.
The list of call participants appears.
2. Highlight a person from the list by pressing the Up or Down key and press the  key.
3. When the **Private** option highlights, press the Centre key or **Ok** soft key.

Now you can talk privately to that person. The other participants can still converse with each other.

4. To return to the multi-party call, press the **Options** soft key and select the **Join** option. Press the Centre key or **Ok** soft key.

All the multi-party call participants can now hear each other.

Dropping One Participant

- 1. Press the **Options** soft key and choose the **Select one** option. Press the Centre key or **Ok** soft key.

The list of call participants appears.

- 2. Highlight a person from the list by pressing the Up or Down key and press the  key.
- 3. Press the Down key to select the **Remove** option and press the Centre key or **Ok** soft key.

The call ends with that participant, but you can continue to talk to the others.

- 4. When you want to end the multi-party call, close the folder or press the Ⓢ key.

Using the Menus

The phone offers a range of functions that allow you to tailor it to your needs. These functions are arranged in menus and sub-menus.

The menus and sub-menus can be accessed by scrolling using the Navigation keys or by using the shortcuts.

Accessing a Menu Function by Scrolling

- 1. In Idle mode, press the Centre key to access Menu mode.
- 2. Scroll using the Navigation keys to reach a main menu, **Phone settings** for example. Press the Centre key or **Select** soft key to enter the menu.
- 3. If the menu contains sub-menus, **Language** for example, you can access them by scrolling using the Up or Down key and pressing the Centre key or **Select** soft key.

If the menu that you have selected contains further options, repeat this step.

4. To	Press the
scroll through the menus	Up or Down key, or use the Volume keys.
confirm the chosen setting	Centre key or Select soft key.
return to the previous menu level	Back soft key.
exit the menu without changing the settings	 Ⓢ key.

Using Shortcuts

When the menu style is set to **Bar Style** or **Page style** (see page 116), the menu items, such as menu, sub-menus and options, can be accessed quickly by using their shortcut numbers.

Simply press the Centre key and enter the number of the menu you want.

Notes:

- The numbers assigned to each menu are indicated on the list on page 61. They may not match the menu number on the phone, depending on the services supported by your SIM card.
- For the menu numbers, 10, 11 and 12, use the **0**, ***** and **#** keys respectively.

Example: Accessing the **Language** menu.

1. Press the Centre key.
2. Press the **5** key for **Phone settings**.
3. Press the **5** key for **Language**.

The languages available display.

List of Menu Functions

The following list shows the menu structure available and indicates the number assigned to each option and the page where you can find a description of each feature.

Note: If you use a SIM AT card that provides additional services, the **SIM AT** menu displays when you press the Centre key to enter Menu mode. For further details, see your SIM card instructions.

1. Messages (see page 67)

- 1.1 Picture messages
 - 1.1.1 Create message
 - 1.1.2 Inbox
 - 1.1.3 Outbox
 - 1.1.4 Draft
 - 1.1.5 Templates
- 1.2 Text messages
 - 1.2.1 Create message
 - 1.2.2 Inbox
 - 1.2.3 Outbox
 - 1.2.4 Templates
- 1.3 MMS Postcard
 - 1.3.1 Create postcard
 - 1.3.2 Draft
 - 1.3.3 Outbox
- 1.4 Album
- 1.5 Vodafone Mail
- 1.6 Vodafone Messenger
- 1.7 Push message
 - 1.7.1 Inbox
 - 1.7.2 Receive
 - 1.7.3 Delete all
- 1.8 Delete all
 - 1.8.1 Picture messages
 - 1.8.2 Text messages
 - 1.8.3 MMS postcard

1. Messages (continued)

- 1.9 Voice mail
 - 1.9.1 Connect to voice server
 - 1.9.2 Voice server number
- 1.10 Broadcast
 - 1.10.1 Read
 - 1.10.2 Receive
 - 1.10.3 Channel list
 - 1.10.4 Language
- 1.11 Memory status
 - 1.11.1 Picture messages
 - 1.11.2 Text messages
- 1.12 Settings
 - 1.12.1 Picture messages
 - 1.12.2 Text messages
 - 1.12.3 MMS profile

2. Call log (see page 96)

- 2.1 Missed calls
- 2.2 Received calls
- 2.3 Dialed calls
- 2.4 Delete all
- 2.5 Call time
 - 2.5.1 Last call time
 - 2.5.2 Total sent
 - 2.5.3 Total received
 - 2.5.4 Reset timers
- 2.6 Call costs*
 - 2.6.1 Last call cost
 - 2.6.2 Total cost
 - 2.6.3 Max cost
 - 2.6.4 Reset counters
 - 2.6.5 Set max cost
 - 2.6.6 Price/unit

* Shows only if supported by your SIM card.

3. Camera (see page 101)

- 3.1 Take photos
- 3.2 My photos
- 3.3 Video
 - 3.3.1 Record
 - 3.3.2 Video clips
- 3.4 Memory status

4. Sound settings (see page 109)

- 4.1 Ringtone
- 4.2 Ring volume
- 4.3 Alert type
- 4.4 Keypad tone
- 4.5 Message tone
 - 4.5.1 SMS tone
 - 4.5.2 SMS-CB tone
 - 4.5.3 MMS tone
- 4.6 Folder tone
- 4.7 Power on/off
- 4.8 Extra tones

5. Phone settings (see page 114)

- 5.1 Activate infrared
- 5.2 Display settings
 - 5.2.1 Wallpaper
 - 5.2.2 Menu style
 - 5.2.3 Back light
 - 5.2.4 Service light
 - 5.2.5 Graphic logo
 - 5.2.6 Front LCD display
- 5.3 Greeting message
- 5.4 Own number
- 5.5 Language
- 5.6 Security
 - 5.6.1 PIN check
 - 5.6.2 Change PIN
 - 5.6.3 Phone lock
 - 5.6.4 Change password
 - 5.6.5 Privacy
 - 5.6.6 SIM lock
 - 5.6.7 FDN mode*
 - 5.6.8 Change PIN2*

* Shows only if supported by your SIM card.

5. Phone settings (continued)

- 5.7 Extra settings
- 5.8 Short cut
 - 5.8.1 Key up
 - 5.8.2 Key down
 - 5.8.3 key right
 - 5.8.4 Key left
- 5.9 Reset settings

6. Organiser (see page 125)

- 6.1 Alarm
 - 6.1.1 Once alarm
 - 6.1.2 Daily alarm
 - 6.1.3 Morning call
 - 6.1.4 Remove alarm
 - 6.1.5 Autopower
- 6.2 Calendar
- 6.3 Time & date
 - 6.3.1 Set time
 - 6.3.2 Set date
 - 6.3.3 World time
 - 6.3.4 Time format
 - 6.3.5 Display options
- 6.4 Calculator
- 6.5 To do list
- 6.6 Voice memo
 - 6.6.1 Record
 - 6.6.2 Memo list
 - 6.6.3 Delete all
 - 6.6.4 Memory status
- 6.7 Currency exchange

7. Network services (see page 138)

- 7.1 Call diverting
 - 7.1.1 Divert always
 - 7.1.2 Busy
 - 7.1.3 No reply
 - 7.1.4 Unreachable
 - 7.1.5 Cancel all
- 7.2 Call barring
 - 7.2.1 All outgoing
 - 7.2.2 International
 - 7.2.3 International except to home
 - 7.2.4 All incoming
 - 7.2.5 Incoming while abroad
 - 7.2.6 Cancel all
 - 7.2.7 Change barring password
- 7.3 Call waiting
 - 7.3.1 Voice call
 - 7.3.2 Data call
 - 7.3.3 Cancel all
- 7.4 Network selection
 - 7.4.1 Automatic
 - 7.4.2 Manual
- 7.5 Caller ID
 - 7.5.1 Default
 - 7.5.2 Hide number
 - 7.5.3 Send number
- 7.6 Closed user group
 - 7.6.1 Index list
 - 7.6.2 Outside access
 - 7.6.3 Default group
 - 7.6.4 Deactivate*

*Shows only if the Closed User Group Feature is active.

Using the Menus

8. Vodafone live! (see page 147)

- 8.1 Browser
- 8.2 My stuff
 - 8.2.1 Games & more
 - 8.2.2 Sounds
 - 8.2.3 Images
 - 8.2.4 Delete all
 - 8.2.5 Memory status
- 8.3 Favourites
- 8.4 Clear cache
- 8.5 WAP profile

Messages

Using the **Messages** menu, you can use various message features, such as:

- multimedia messages
- short text messages
- postcards
- WAP push messages
- voice mail
- cell broadcast messages

You can also access online album, mail and messenger services given by your service provider.

Picture messages

This menu allows you to use the Multimedia Message Service.

Multimedia Message Service (MMS) is a messaging service very similar to Short Message Service (SMS). It provides automatic and immediate delivery of personal multimedia messages from phone to phone or from phone to e-mail.

In addition to the familiar text content of text messages, multimedia messages can contain images, graphics, voice and audio clips. An MMS message is a multimedia presentation in a single entry. It is not a text file with attachments.

Using the MMS feature, your phone can receive and send multimedia messages that contain multimedia files, such as your photos, sounds and images you downloaded from the Internet and voice memos you recorded. This function is available only if it is supported by your service provider. Only phones that offer multimedia message features can receive and display multimedia messages.

Create message

This menu allows you to create a new multimedia message and then send it to multiple destinations.

Creating and Sending a Multimedia Message

1. Enter the subject of your message and press the Centre key or **Next** soft key.

For further details about entering characters, see page 45.

2. When **Add here** highlights, press the **Options** soft key and add the message contents using one of the following options:

Note: Pressing the Centre key when **Add here** highlights immediately selects the first available option.

- **Add text:** enter the message text and press the Centre key or **Ok** soft key.
- **Add my photo:** allows you to add a photo you took using the camera on your phone. Select **Take photos** to take a new photo, or **My photos** to add one of the photos stored in the phone's memory. For further details about using the camera, see page 101.
- **Add picture:** allows you to add a picture stored in the **Images** folder. Choose a picture and press the Centre key. You cannot add images in GIF or WBMP format.
- **Add sound:** allows you to add a sound file. Select **Record** to record a new voice memo, or **Sound list** to add one of the sounds in the **Sounds** folder or voice memo list. You cannot add sounds in MID or MMF format.

- **Send to:** allows you to send the message. Use this option when you finish creating the message.
- **Save:** saves the message in the **Draft** or **Templates** box for later use.
- **Settings:** allows you to change the message settings. For further details about each setting option, see page 91. After changing the settings, you need to press the **Back** soft key to go back to the options screen.
- **Preview:** shows your message as it will display on the recipient's phone.

Note: You can add text, an image and a sound once for each page.

3. Repeat step 2 until you finish creating your message.
4. If you want to change the added items, press the Up or Down key to highlight one and press the **Options** soft key to display the Options list.

Notes:

- The options available are different depending on whether the item you select on the message screen is text, an image, a sound or the Page field.
- When an item is highlighted on the Create message screen, pressing the Centre key immediately selects the first option.

The following options are available:

- **Edit text/picture/sound:** allows you to change the text or replace the image or sound with another one.

- **Add page:** allows you to add up to 5 pages. After adding pages, you can move to each page using the Left or Right key on the message screen. After you add a page, the display shows you the current page number and memory space used for the page.
- Note:** Pressing the Centre key when the Page field is highlighted, adds a page.
- **Delete:** deletes the item from your message.
 - **Duration:** allows you to set when and how long text, an image or a sound displays on the message presentation screen. When the message is opened, the display shows the item after a specified time in **Set start time** and scrolls to the next item after a specified time in **Set duration**.
 - **Send to:** allows you to send the message.
 - **Save:** saves the message in the **Draft** or **Templates** box for later use.
 - **Settings:** allows you to change the message settings. For further details about each setting option, see page 91.
 - **Preview:** shows your message as it will display on the recipient's phone.
5. When you are finished creating the message, choose **Send to** from the options and press the Centre key or **Select** soft key.
 6. Select a destination type (**To**, **Cc** or **Bcc**) and press the Centre key or **Select** soft key.

7. Choose one of the following options and press the Centre key or **Select** soft key:
 - **Phone number:** allows you to enter the phone number you want.
 - **E-Mail:** allows you to enter the e-mail address of the recipient.
 - **Contacts:** allows you to retrieve a number from your Contacts.
8. Enter a number or an e-mail address, or select a number from Contacts.
9. When the correct number or address displays, press the Centre key or **Ok** soft key.
10. To add a destination, press the Centre key or **Select** soft key when **Add destination** highlights. Repeat from step 7.

If you want to edit the destinations, select one and press the Centre key or **Select** soft key. You can change or delete it.
11. To enter additional numbers or addresses to the other destination types, press the **Back** soft key and repeat steps 6 through 10.

You can enter up to 10 destinations each for **To**, **Cc** and **Bcc**.
12. When you are finished entering the destinations, select **Send message** and press the Centre key or **Select** soft key.

Your phone sends the message.

Inbox

Viewing a Message When You Receive it

When a new multimedia message comes in, the display shows the MMS Message icon () and a text notification along with the sender's number.

1. Press the Centre key or **View** soft key to view brief information about the message, such as the sender's number, the message size and the subject.

If you want to view the message later in the Inbox, press the **Back** soft key.

2. To scroll through the message information, press the Up or Down key.

You can use the following options by pressing the **Options** soft key:

- **Retrieve:** retrieves the message from the MMS server.
- **Delete:** deletes the message.
- **More properties:** shows you detailed information about the message.

3. To read the message, press the Centre key.

Your phone retrieves the message contents from the server and displays it.

4. To scroll through the message, press the Up or Down key.

5. When you are finished, press the  key.

Viewing a Received Message in the Inbox

When you access the **Inbox** menu, the list of multimedia messages you received displays with the senders' phone numbers (if they are available in your Contacts) or subjects. The icons on the left tell you the status of the messages.

-  : Messages that have been opened.
-  : Messages you sent an enquiry to the MMS server for retrieving it.
-  : Messages the phone is retrieving from the MMS server.
-  : Messages the phone couldn't retrieve.
-  : Messages that are unopened.

1. Select a message on the list and press the Centre key or **View** soft key.

The message displays and scrolls to the next page, if it has one, after a specified time; for details about setting the time, see page 91.

2. Press the Centre key or **Ok** soft key to go to the message view screen.

Or, the display automatically switches to the screen after a few seconds.

3. To scroll through the message, press the Up or Down key.

If the message has more than one page, you can scroll through the pages by using the Left and Right keys.

While viewing a message, you can choose the Message options by pressing the **Options** soft key.

If you are viewing a new message, the options are the same as when you view a message as soon as you receive it. See page 72.

When you are reviewing a message retrieved from the MMS server, the following options are available:

Delete: deletes the message.

Reply: allows you to reply to the sender by sending a text or multimedia message.

Callback: allows you to call the sender back.

Cut address: allows you to extract the sender's number or e-mail address and URL, e-mail addresses or phone numbers from the message text.

Forward: allows you to forward the message to another person. When the message contains media contents, this option is not available.

Save picture: allows you to save an image from the message into your phone. Pictures are stored in the **Images** folder.

Save sound: allows you to save a sound from the message into the **Sounds** folder.

Properties: shows you information about the message, such as the message status, subject, sender's e-mail address or phone number, message size, priority, and the time and date when the message was received.

Outbox

When you access this menu, the list of the multimedia messages you sent or saved displays. The icons on the left tell you the status of the messages.

- : Messages currently being sent
- : Messages sent
- : Messages your phone couldn't send
- : Messages to be sent
- : Messages deferred

1. Select a message on the list and press the Centre key or **View** soft key.

The message displays and scrolls to the next page, if it has one, after a specified time; for details about setting the time, see page 91.

2. Press the Centre key or **Ok** soft key to go to the message view screen.

Or, the display automatically switches to the screen after a few seconds.

3. To scroll through the message, press the Up or Down key.

If the message has more than one page, you can scroll through the pages by using the Left and Right keys.

While viewing a message, you can choose the following options by pressing the **Options** soft key:

Delete: deletes the message.

Cut address: allows you to extract the destination numbers or e-mail addresses and URL, e-mail addresses or phone numbers from the message text.

Send: allows you to send/resend the message.

Edit message: allows you to change the message contents, sound, picture or text.

Properties: shows you information about the message, such as the message status, subject, sender and recipients' e-mail addresses or phone numbers, message size, priority and the time and date when the message was sent.

Draft

After creating a multimedia message, you can store it in this message box for later sending.

For further details about viewing a message, see "Outbox" on page 75.

Templates

This menu stores messages you saved as templates so that you can use them to make new messages.

1. Scroll through the template list using the Up or Down keys.
2. When the message template you want highlights, press the Centre key or **View** soft key.
3. Press the Centre key or **Ok** soft key to use the following options, or the display automatically shows the options after a specified time:
 - **Edit message:** allows you to send a message using the template. For further details about how to send a message, see page 68.
 - **Delete:** allows you to delete the message. You are asked to confirm the deletion by pressing the Centre key or **Yes** soft key.
4. Press the  key to return to Idle mode.

Text messages

Short Message Service (SMS) allows you to send and receive short text messages to and from other GSM mobile phones. In addition, your phone supports the Enhanced Messaging Service (EMS), which enables you to include simple pictures, melodies, and animated images in your messages. To use this feature, you must subscribe to your service provider's message service.

When the Text Message icon () appears, you have received new text messages. If the memory is full, an error message displays and you cannot receive any new messages. Use the **Delete** option in each message box to delete the obsolete ones.

Create message

In this menu, you can write and send a text message.

Note: When you add media objects to the message, the number of characters you can enter decreases.

Creating a Simple Text Message

1. Create your message.

Note: For further details about entering characters, see page 45.

2. When you finish entering the message, press the **Options** soft key. The following options are available:

- **Send only:** allows you to send the message. The message is deleted after sending.

Note: You can select this option by pressing the Centre key on the Create message screen.

- **Save and send:** allows you to save a copy of the message and then send the message. You can read the message in your Outbox.
- **Save only:** allows you to save the message so that it can be sent later. You can read the message in your Outbox.
- For further details about **Text formatting**, **Add objects**, **Add templates**, **Add contact**, **Add bookmark** and **Language** options, see page 79.

3. Select **Send only** or **Save and send**, and press the Centre key or **Select** soft key.

If you want to just save the message, select **Save only**. After saving the message, the phone returns to the **Text messages** menu.

4. If you select a save option, choose the memory location and press the Centre key or **Ok** soft key.
5. Enter a destination number and press the Centre key or **Ok** soft key.

The message is sent.

Note: If the phone fails to send the message, it will ask you if you want to retry. Press the Centre key or **Ok** soft key to confirm. Otherwise, press the **Exit** soft key to return to the Create message screen.

Creating a Text Message Using the Options

1. Create a message.
2. Press the **Options** soft key.

3. Select one of the following options by using the Up and Down keys and pressing the Centre key or **Select** soft key:

- **Text formatting:** allows you to format the style of the text.

For the **Size** attribute, **Normal**, **Large** and **Small** sizes are available.

For the **Bold**, **Italic**, **Underline** and **Strikethrough** attributes, select **On** or **Off**.

These attributes can be combined.

- **Add objects:** allows you to add a sound, melody, picture or animated image to the message. Select the category of the object to be added. In each category, you can select from the various factory-set items or choose an item received from other sources, such as the Internet or other phones.
- **Add templates:** allows you to apply one of the preset message templates to the text. Select one of five messages stored in the **Templates** menu. For further details, see page 83.
- **Add contact:** allows you to add a Contacts entry to your message. Select one from the list.
- **Add bookmark:** allows you to add a web page's address stored in your Favourites list. Select one from the list.
- **Language:** allows you to change the language to be used in T9 input mode. Select the language you want to use.

4. Complete the message, and send or save it by following the procedure from step 2 on page 78.

Inbox

This message box is used to store the messages that you have received.

When you enter this menu, the list of messages in the box displays with the senders' phone numbers or names, if available in your Contacts.

1. Select a message from the list and press the Centre key or **View** soft key to read the message contents.
2. To scroll through the contents, press the Up or Down key.
3. To scroll to the previous or next message, press the **⌂** or **#** key.

While reading a message, you can choose the following options by pressing the **Options** soft key:

Delete: allows you to delete the message.

Edit: allows you to change the message and send/resend it. For further details, see page 78.

Reply: allows you to reply to the sender by sending a text message.

Call back: allows you to call the sender back.

Cut address: allows you to extract the sender's number and URL, e-mail addresses or phone numbers from the message text.

Move to phone: allows you to move the message from the SIM card to the phone's memory. This option is only available when you select a message stored in the SIM card.

Move to SIM: allows you to move the message from the phone's memory to the SIM card. This option is only available when you select a message stored in the phone's memory.

Select objects: allows you to save media objects, such as sounds or images, from the message into your phone. You can use the objects when writing a message. For details, see page 80.

Outbox

This message box is used to store the messages that you have already sent or will send.

When you enter this menu, the list of messages in the box displays with the recipients' phone numbers or names, if available in your Contacts.

1. Select a message from the list and press the Centre key or **View** soft key to read the message contents.
2. To scroll through the contents, press the Up or Down key.
3. To scroll to the previous or next message, press the **⌘** or **⌘** key.

While reading a message, you can choose the following options by pressing the **Options** soft key:

Delete: allows you to delete the message.

Send: allows you to send/resend the message. For further details, see page 78.

Cut address: allows you to extract the destination number and URL, e-mail addresses or phone numbers from the message text.

Move to phone: allows you to move the message from the SIM card to the phone memory. This option is only available when you select a message stored in the SIM card.

Move to SIM: allows you to move the message from the phone memory to the SIM card. This option is only available when you select a message stored in the phone's memory.

Select objects: allows you to save media objects, such as sounds or images, from the message into your phone. You can use the objects when writing a message. For details, see page 80.

Templates

Using this menu, you can preset a maximum of five messages that you use most frequently.

Select an empty location or the message template you want and press the **Options** soft key.

The following options are available:

Edit: allows you to write a new message or edit the message.

Note: For further details about how to enter characters, see page 45.

Send message: allows you to retrieve the message. Once you have completed the message, you can send, save and send, or simply save it. For further details about how to send a message, see page 78.

Delete: allows you to delete the message. You are asked to confirm the deletion by pressing the Centre key or **Yes** soft key.

MMS postcard

In this menu, you can send photos stored in the **My photos** menu as a postcard along with a simple greeting. Your message is sent to the MMS centre, where it is formatted, printed and sent out as a real postcard to the address of your choice.

Note: This feature may not be available depending upon your country. Please contact your service provider for further details.

Create postcard

You can create and send a new postcard.

1. Select the photo you want to send using the Navigation keys and press the Centre key.

Note: Use a photo in maximum resolution.

You can also select one of the following options by pressing the **Options** soft key:

- **Select:** selects the photo.
- **View:** displays the photo on the full screen. To use this photo, press the Centre key or **Select** soft key.

2. Enter a greeting message and press the Centre key or **Ok** soft key.

Note: For further details about entering characters, see page 45.

3. Scroll to the field using the Up or Down key and press the Centre key to enter the recipient information.

The following options are available:

- **Name:** enter the recipient's name.
- **Additional Info:** enter any additional personal information.
- **House No. / Street:** enter the house number and street.
- **Postcode:** enter the postcode.
- **County / City:** enter the county and city.
- **Country:** enter the country.

Note: If you do not enter the name, house number/street, post code and country, your message cannot be sent.

4. When you are finished, press the **Options** soft key.
5. Select **Send to** to send the message and press the Centre key or **Select** soft key.

To send it later, select **Save** to save it in the Draft box.

Draft

This box stores the postcards you saved to be sent later.

1. Select a postcard from the list and press the Centre key or **View** soft key.
2. Press the Up and Down keys to scroll through the contents.

While viewing a postcard, press the **Options** soft key to use the following options:

Delete: deletes the postcard.

Send: sends/resend the postcard.

Edit message: allows you to change and send the postcard.

Properties: shows you information about the message, such as the message status, subject and message size.

Outbox

This box stores the postcards you sent.

For details about viewing a postcard or using the options, see "Draft" on page 85.

Album

From this menu, you can access the Picture album. Your Picture album allows you to store your pictures and compose multimedia messages. You can also access Vodafone content and message templates. Please contact your service provider for more information.

Vodafone Mail

Behind this link, you will find the Vodafone Mail service offering you mobile access and management of your emails, either by using your Vodafone email account or by fetching your existing email account. This service can be upgraded offering you Unified Messaging-an integrated inbox with all your voice mails, faxes and emails. Please contact your local service provider for more information.

Vodafone Messenger

With Vodafone Messenger, you can stay in touch and have fun with friends through instant text conversations. You will know when your friends are available to chat and that they immediately receive your instant messages. When you first start using Vodafone Messenger, all you need to know is your friend's mobile number to build your Vodafone Messenger contact list.

Push message

In this menu, you can receive and access web messages from the server.

The following options are available:

Inbox: allows you to read the messages received from the web server.

Receive: allows you to set whether or not your phone receives web messages. Select **Always** to receive web messages or **Never** to reject web messages.

Delete all: allows you to delete all of the web messages.

Delete all

This menu allows you to delete all of the messages in each message box. You can also delete all of your messages at one time.

1. Select a message type and press the Centre key or **Select** soft key.

To	Press the
select a message box to clear	Up or Down key. To delete all of your messages, select All messages .
place a check mark	Mark soft key.
remove a check mark	Unmark soft key.

3. Press the Centre key to delete the marked messages.
4. When a confirming message displays, press the Centre key or **Yes** soft key to confirm.
5. When the display confirms again, press the Centre key or **Yes** soft key.

Voice mail

This menu allows you to access your voice mailbox, if your network supports this service.

The following options are available:

Connect to voice server: before using the Voice Mail feature, you must enter the voice server number obtained from your service provider. You can then select this option and press the Centre key or **Ok** soft key to listen to your messages.

You can quickly connect to the voice server by pressing and holding the **1** key in Idle mode.

Voice server number: allows you to change the voice mail server number, if necessary.

To	Press the
enter the server number	corresponding numeric keys.
correct a digit	C key.
move the cursor to the left or right without clearing a digit	Left or Right key.

Note: Voice Mail is a network feature. Please contact your service provider for further details.

Broadcast

This network service allows you to receive text messages on various topics, such as the weather or traffic. Cell Broadcast (CB) messages display as soon as they are received, provided that:

- the phone is in Idle mode.
- the **Receive** option is set to **Enable**.
- the message channel is currently active on the channel list.

The following options are available:

Read: lets you view the received message. The **Volatile** box displays the messages from the network, but loses its contents as soon as the phone is switched off. Scroll through the message by using the Up and Down keys. While reading a message, press the **Save** soft key to store the message in the **Archive** box for later retrieval.

Receive: allows you to enable or disable the reception of broadcast messages.

Channel list: allows you to indicate the channels from which you wish to receive broadcast messages. The following options are available:

Select: use to enable or disable channels on the list by marking or unmarking them respectively. A check mark displays in front of each selected channel.

Add channel: use to enter the ID and title for a new channel.

Delete: use to remove a channel from the list.

Edit: use to change the ID and title of an existing channel.

Language: allows you to select your preferred language to display cell broadcast messages.

Please contact your service provider for further details.

Memory status

You can check the amount of the memory being used and the memory remaining for messages.

Picture messages: shows the total space, including the free and used space, and how much space is currently occupied by each message box. Press the Up or Down key to scroll through the screen.

Text messages: shows the number of messages currently stored and the total number of messages you can store in the SIM, Phone and CB memories. If necessary, press the Up or Down key to scroll through the screen.

Settings

This menu allows you to configure various settings for using the Message feature.

Picture messages

You can change the default settings for sending or receiving multimedia messages.

The following options are available:

Delivery report: when this option is enabled, the network informs you whether or not your message has been delivered.

Read reply: when this option is enabled, your phone sends a request for a reply along with your message to the recipient.

Auto download: you can set whether or not your phone retrieves new incoming messages from the MMS server without notifications.

On: the phone automatically retrieves new messages from the server. As soon as you receive a message you can use more options while you are reading. See page 74 for details about the options.

Off: you need to manually download new messages by using the **Retrieve** option.

Off when roaming: the phone automatically downloads new messages unless you are roaming on another network or in another country.

Message acceptance: you can specify the category of messages you want to receive.

Hide ID: when this option is enabled, your phone number does not display on the recipient's phone.

Expiry date: you can select the length of time your messages are stored in the message centre after they are sent.

Delivery time: you can set a delay time before the phone sends your messages.

Priority: you can select the priority level of your messages.

Report allowed: when this option is enabled, the sender of an incoming message receives a delivery report from the network.

Page duration: you can set the length of time one page of a received message displays on the message presentation screen. After a specified time, the display automatically scrolls to the next page.

Text messages

In this menu, you can set up default SMS/EMS information. A setting group is a collection of settings required to send text messages. The number of setting groups available depends on the capacity of your SIM card.

Notes:

- The setting options available in this menu may be different depending on your service provider.
- The last setting you accessed is automatically activated for sending messages.

Setting x (where **x** is the setting group number): each group has its own sub-menu.

Service centre: allows you to store or change the number of your message centre, which is required when sending messages. You must obtain this number from your service provider.

Default destination: allows you to store the default destination number. The number automatically displays on the Destination screen when you create a message.

Default type: allows you to set the default message type to **Text**, **Fax**, **Email** or **Paging**. The network can convert the messages into the selected format.

Default validity: allows you to set the length of time your text messages are stored in the message centre while attempts are made to deliver them.

Setting name: allows you to give a name to the setting group currently being defined.

Common settings: The following options are available:

Reply path: allows the recipient of your message to send you a reply through your message centre, if your network supports this service.

Delivery reports: allows you to activate or deactivate the report function. When this function is activated, the network informs you whether or not your message has been delivered.

Bearer selection: allows you to choose either **GSM** or **GPRS**, depending on your network.

MMS profile

In this menu, you can configure various network settings that are required when you send or receive multimedia messages.

Notes:

- The last profile you accessed is automatically activated for sending messages.
- If you change the MMS settings without first checking with your service provider, the MMS feature may not work properly.
- The availability of the setting options may vary depending on your country.

The following options are available for each profile:

Profile name: enter a name that you wish to assign to the MMS server.

Connection URL: enter the address of your MMS server.

Security: select a data transmission mode. Choose **Secure** to protect your data against unauthorised access; otherwise, choose **Non-secure**.

IP address: enter the gateway address required to connect to the MMS server.

User name: enter the user ID required to connect to the MMS server.

Password: enter the password required to connect to the MMS server.

APN: enter the access point name used for the address of the MMS server.

For further details, contact your service provider.

Call log

In this menu, you can view the:

- calls you missed, received or dialled.
- length of your calls.
- cost of your calls.

Notes:

- You can access the numbers in the three types of call records by pressing the  key in Idle mode.
- The number of call records the phone can store may be different depending on your SIM card.

Missed calls

This menu lets you view the last 20 numbers of the calls you received, but did not answer.

The number or name, if available, displays together with the time and date when the call was received.

Press the  key to dial the number.

Press the Centre key to edit the number and dial it or save it in Contacts.

By pressing the **Options** soft key, you can use the following options:

- **Edit:** allows you to edit the number and dial it or save it in Contacts.
- **Delete:** deletes the call from the list.

Received calls

This menu lets you view the last 20 numbers of the calls you received.

The number or name, if available, displays together with the time and date when the call was received.

Press the  key to dial the number.

Press the Centre key to edit the number and dial it or save it in Contacts.

By pressing the **Options** soft key, you can use the following options:

- **Edit:** allows you to edit the number and dial it or save it in Contacts.
- **Delete:** deletes the call from the list.

Dialled calls

This menu lets you view the last 20 numbers you dialled.

The number or name, if available, displays together with the time and date when the call was made.

Press the  key to dial the number.

Press the Centre key to edit the number and dial it or save it in Contacts.

By pressing the **Options** soft key, you can use the following options:

- **Edit:** allows you to edit the number and dial it or save it in Contacts.
- **Delete:** deletes the call from the list.

Delete all

This menu allows you to delete all of the logs in each call type. You can also delete all of your call logs at one time.

1. To	Press the
select a call log type to clear	Up or Down key. To delete all of your call logs, select All calls .
place a check mark	Mark soft key.
remove a check mark	Unmark soft key.

- Press the Centre key to delete the marked logs.
- When a confirming message displays, press the Centre key or **Yes** soft key to confirm.

Call time

This menu lets you view the timers for calls you made and received.

Note: The actual time invoiced for calls by your service provider may vary, depending on network features, rounding-off for billing purposes and so on.

The following options are available:

Last call time: length of the last call.

Total sent: total length of all calls you made since the timer was last reset.

Total received: total length of all calls you received since the timer was last reset.

Reset timers: option used to reset the call timers. You must first enter the phone password and then press the Centre key or **Ok** soft key.

Note: The password is preset to "00000000." To change this password, see page 163.

Call costs

This network feature lets you view the cost of calls. This menu may not be available depending on your SIM card.

The following options are available:

Last call cost: cost of the last call you made.


Total cost: total cost of all calls you made since the cost counter was last reset. If the total cost exceeds the maximum cost set in the **Set max cost** option, you can no longer make any calls until you reset the counter.

Max cost: maximum cost set in the **Set max cost** option. See below.

Reset counters: option used to reset the cost counter. You must first enter your PIN2 (see page 165) and then press the Centre key or **Ok** soft key.

Set max cost: option used to enter the maximum cost that you authorise for your calls. You must first enter your PIN2 (see page 165) and then press the Centre key or **Ok** soft key.

Price/unit: option used to set the cost of one unit; this price per unit is applied when calculating the cost of your calls. You must first enter your PIN2 (see page 165) and then press the Centre key or **Ok** soft key.



Camera

Using the camera module in your phone, you can take photos of people or events while on the move. Additionally, you can send photos to other people in a multimedia message or set a wallpaper or caller ID image.

You can also record videos using your phone as a camcorder.

CAUTION:

- Do not take photos of people without their permission.
- Do not take photos in a place where cameras are not allowed.
- Do not take photos in a place where you may interfere with another person's privacy.

Taking a photo

Your camera produces JPEG pictures. You can take photos with the folder open or closed. When the folder is closed, you can use the external display.

Note: When you take a photo in direct sunlight or in bright conditions, shadows may appear on the photo.

Taking a Photo with the Folder Open

1. In Idle mode, press and hold the Camera () key on the right side of the phone to turn the camera on.

The image to be captured appears on the display.

- 2. Adjust the image by aiming the camera at the subject.
 - Use the Volume keys or Up and Down keys on the left side of the phone to zoom in or out.
 - Use the Left and Right keys to adjust the brightness of the image.
 - Use the right soft key to turn on the flash on the folder.
 - Press the left soft key to use the camera options. For details, see page 103.
- 3. Press the Centre or Camera key to take the photo.
- 4. Press the Centre key or **Save** soft key.
To discard the photo, press the **Cancel** soft key.

To	Press the
use the photo options	Options soft key. For details, see page 105.
send the photo as a multimedia message	Centre key. See page 68.
return to Capture mode	Back soft key.
return to Idle mode	 key.

Taking a Photo with the Folder Closed

Note: If the external display turns off, you first need to turn it on by pressing and holding one of the Volume keys.

- 1. When the folder is closed, press and hold the Camera () key on the right side of the phone.
The image to be captured appears on the external display.
- 2. Adjust the image by aiming the camera at the subject.
You can turn the flash on or off using the Volume keys.
- 3. Press the Camera key to take the photo.
Your phone automatically saves the photo and returns to Capture mode.

Using the Camera options

In Capture mode, you can use various options for the camera by pressing the left soft key.

To	Press the
scroll to an option	Up or Down key.
select the highlighted option	Centre key or Select soft key.
return to Capture mode	Back soft key.

The following options are available:

Effects: allows you to change the colour tone or apply special effects to the photo.

Frames: allows you to use a decorated frame. Select a frame from the list using the Navigation keys.

Multi-shot: allows you to take a series of action stills. Select the capture speed to **High speed** or **Normal speed** and the number of photos for the camera to take. When you press the Centre key or Camera key, the camera takes photos successively.

After taking photos, press the **SaveAll** soft key to save all of them or the **Save** soft key to save the selected one.

Rotation: rotates the photo. You can reverse the photo as a mirror image or flip the photo vertically.

Self timer: allows you to have a delay time before the camera takes the photo. Select the length of time you want. When you press the Centre or Camera key, the camera takes the photo after the specified time.

Settings: allows you to change the default image settings.

Photo size: sets the image size to either **VGA(640x480)**, **QVGA(320x240)**, **QQVGA(160x120)** or **Mobile(128x120)**. The selected image size displays on the capture screen.

Photo quality: allows you to select the image quality from **Economy**, **Normal**, **Fine** and **Super fine**. The selected quality displays on the capture screen.

Take photos

This menu allows you to take a photo.

Accessing this menu turns the camera on and the display switches to Capture mode. For further details about taking a photo, see page 101.

My photos

This menu allows you to review your photos.

When you access this menu, your phone displays the photos in Thumbnail mode, which shows them as small images. Use the Navigation keys to scroll through the photos.

To view the photos on the full screen, press the Centre key. In this mode, pressing the Centre key allows you to send the current photo as a multimedia message. To go back to Thumbnail mode, press the **Back** soft key.

Press the **Options** soft key to use the following options:

View: show the photo on the full screen. This option is available only in Thumbnail mode.

Send: allows you to send the photo as a multimedia message. For further details, see page 68.

MMS postcard: allows you to send an MMS postcard using the selected photo. For details, see page 84.

Rename: allows you to change the name of the photo.

Set as wallpaper: allows you to set the photo as your wallpaper on the idle screen.

Set as caller ID: allows you to set the photo as a caller ID image for a Contacts entry.

Protection: allows you to protect the photo from being deleted.

Delete: allows you to delete the photo.

Delete all: allows you to delete all of the photos saved in your phone. This option is available only in Thumbnail mode.

Properties: shows the properties of the photo, such as the time and date it was taken, file size, photo size, protection status, file format and file name.

Video

You can record a video using your phone as a camcorder.

Record

You can record up to five videos.

1. When the camera turns on, adjust the image by aiming the camera at the subject.
 - Use the Volume keys on the left side of the phone or the Up and Down keys to zoom in or out.
 - Use the Left and Right keys to adjust the brightness of the image.
 - Use the right soft key to turn on the flash on the folder.

2. Press the left soft key, Centre key or Camera key to start recording.
3. When you are finished, press the left soft key or Centre key.

Or, the phone automatically stops when the recording time expires.
4. Press the Centre key or **Save** soft key. The video is saved and the display returns to Record mode.

To discard the video, press the **Cancel** soft key.

Video clips

When you access this menu, the thumbnail images of your videos display.

To play a video:

1. Press the Navigation keys to scroll to the video you want to review.
2. Press the Centre key to start playing the video.

3. To	Press the
pause the playing	Pause soft key.
resume	Continue soft key.
stop	Stop soft key.
return to Idle mode	 key.

Press the **Options** soft key on the video list to use the following options:

Rename: allows you to change the file name.

Camera

Delete: allows you to delete the current video file.

Delete all: allows you to delete all of your video files.

Protection: allows you to protect the video from being deleted.

Properties: shows the properties of the video, such as the time and date it was recorded, file size, protection status, and playing time.

Memory status

You can check the amount of the memory being used and the memory remaining in the camera.

Each time you press the Up or Down key, the display shows the total, used and free space for photos and videos.

Sound settings

You can use the Sound Settings feature to customise various settings, such as the:

- ring melody, volume and type.
- sounds made when you press a key, receive a message, open/close the folder or switch your phone on/off.
- alert tone made every minute during a call, when you make an error or when your call is connected to the system.

Note: When the phone is in Silent mode (see page 29), you cannot change the sound settings.

Ringtone

This menu allows you to select a ring melody.

You can choose between many different melodies. If you have downloaded sounds from the Internet or the optional EasyGPRS programme, you can use them in this menu.

Using the **Download more** option, you can access the web site given by your service provider to download melodies.

Ring volume

This menu allows you to adjust the ring volume to one of five levels.

Use the Up and Down keys or the Volume keys on the left side of the phone to increase or decrease the volume.

Alert type

This menu allows you to specify how you are to be informed of incoming calls or alarms you set.

The following options are available:

Light only: the service light flashes; the phone neither rings nor vibrates.

Melody: the phone rings using the selected ring tone or alarm melody.

Vibration: the phone vibrates but does not ring.

Vibra+melody: the phone first vibrates three times and then starts ringing.

Keypad tone

This menu allows you to select the tone that the phone sounds when you press a key.

To turn the sound off, select **Off**.

Message tone

This menu allows you to select how the phone informs you that a new message has been received.

SMS tone

The following options are available for alerting you to new SMS messages:

Off: the phone does not use an SMS tone.

Light only: the service light flashes.

Vibration: the phone vibrates.

Single beep: the phone beeps once.

SMS tonex: the phone uses one of several SMS tones.

SMS-CB tone

The following options are available for alerting you to new cell broadcast messages:

Off: the phone does not use a CB tone.

Light only: the service light flashes.

Vibration: the phone vibrates.

Single beep: the phone beeps once.

SMS-CB tonex: the phone uses one of several CB tones.

MMS tone

The following options are available for alerting you to new multimedia messages:

Off: the phone does not use an MMS tone.

Light only: the service light flashes.

Vibration: the phone vibrates.

Single beep: the phone beeps once.

MMS tonex: the phone uses one of several MMS tones.

Folder tone

This menu allows you to turn on or off the tone that the phone sounds when you open or close the folder. To use the folder tone, select either **Future** or **Crystal**.

To turn the sound off, select **Off**.

Power on/off

This menu allows you to turn on or off the melody that the phone sounds when it is switched on and off. To use the power on/off tone, select either **Classical** or **Cheerful**.

To turn the sound off, select **Off**.

Extra tones

You can customise additional tones used for the phone.

To turn a given tone	Press the
on	On soft key. A check mark displays in front of the option.
off	Off soft key. The check mark no longer displays.

The following options are available:

Error tone: sets whether or not the phone informs you when you make a mistake.

Minute minder: sets whether or not the phone beeps every minute during an outgoing call to keep you informed of the length of your call.

Connect tone: sets whether or not your phone beeps when your call is connected to the system.


Phone settings

Many different features of your phone can be customised to suit your preferences. All of these features are accessed in the **Phone settings** menu.

Activate infrared

This feature allows you to send or receive data through the infrared port. To use an infrared connection, you must:

- configure and activate an IrDA-compliant infrared port on your PC.
- activate the infrared feature on the phone; the IrDA icon () appears on the top line of the display.
- align the IrDA port on the phone with the IrDA port on your computer or another phone.

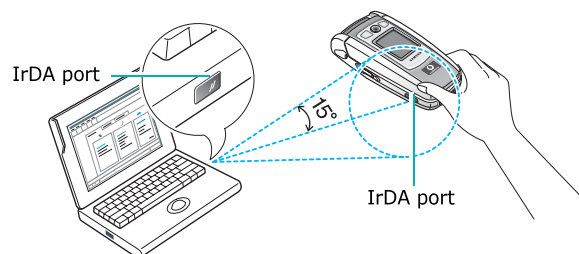

The connection is ready for data transmission.

If there is no communication between your phone and the IrDA-compliant device within 30 seconds of activating the feature, it is automatically deactivated.

Note: For optimal performance, use an optional data link cable. You can purchase one from your local Samsung dealer.

Display settings

In this menu, you can change various settings for the display or backlight.

Wallpaper

This menu allows you to change the background image or the colour of the text to be displayed in Idle mode.

The following options are available:

Wallpaper list: you can select a background image to be displayed on the idle screen.

To change the background image:

1. Scroll through the list by pressing the Up or Down key.

You have various preset images available. You can also select a blank background or any images downloaded from the Internet and the optional EasyGPRS programme or received in messages.

Once you have set a photo as the wallpaper, it displays as **My photo** on this list.

2. Press the Centre key or **Select** soft key when the image you want highlights.
3. When the image displays, press the Centre key or **Select** soft key to display it on the idle screen.

Using the **Download more** option, you can access the web site given by your service provider to download more images.

Text display: you can specify whether or not the phone displays the current time and date.

Text colour: you can select the colour of the text to be displayed on the idle screen.

Menu style

This menu allows you to select the menu display style. You can choose either **Grid style**, **Bar style** or **Page style**.

Back light

You can select the length of time the backlight is on. The backlight turns on when you press a key or receive a call or message and remains on for the specified length of time.

Service light

This menu allows you to select whether or not the service light is used. It also allows you to select a colour in which it flashes.

To use the service light, select one of the seven colour settings. When the phone is ready for use, the service light flashes in the chosen colour.

If you do not wish to use the service light, select **Off**.

Graphic logo

This menu allows you to display your service provider's logo instead of its name.

Off: the service provider's name displays in Idle mode.

On: the service provider's logo stored in your phone displays in Idle mode; if no logo has been stored, the service provider's name displays.

Front LCD display

This menu allows you to adapt the external display to your preference.

The following options are available:

Display type: allows you to change the type of the external display.

No display: the display shows only the current time on a digital clock.

Date display: the display shows the current time and date.

Analog clock: the display shows the current time both on digital and analogue clocks.

Light timer: allows you to select the length of time the external display shows the date or analogue clock.

Greeting message

This menu allows you to set a greeting to be displayed briefly when the phone is switched on.

To	Press the
clear the existing message	C key and hold it down until the message is cleared.
enter a new message	appropriate alphanumeric keys.
change the text input mode	right soft key.

For further details about how to enter characters, see page 45.

Own number

This function is a memory aid, which you can use to check your own phone numbers if you need to do so.

You can:

- assign a name to each of your own phone numbers registered on your SIM card.
- edit the names and numbers.

Any changes made here do not in any way affect the actual subscriber numbers on your SIM card.

Language

You can select a display language. When the language option is set to **Automatic**, the language is automatically selected according to the language of the SIM card used.

Note: Depending upon your country, service provider or software version of the phone, the **Automatic** option may not display.

Security

The Security feature enables you to restrict the use of your phone to others and the types of calls.

Various codes and passwords are used to protect features of your phone. They are described in the following sections. Also see pages 163-166.

PIN check

When the PIN Check feature is enabled, you must enter your PIN each time you switch the phone on. Consequently, any person who does not have your PIN cannot use your phone without your approval.

Note: Before disabling the PIN Check feature, you must enter your PIN.

The following options are available:

Disable: the phone connects directly to the network when you switch it on.

Enable: you must enter the PIN each time the phone is switched on.

Change PIN

This feature allows you to change your current PIN to a new one, provided that the PIN Check feature is enabled. You must enter the current PIN before you can specify a new one.

Once you have entered a new PIN, you are asked to confirm it by entering it again.

Phone lock

When the Phone Lock feature is enabled, the phone is locked and you must enter an 8-digit phone password each time the phone is switched on.

The password is preset to "00000000" at the factory. To change the phone password, see the **Change password** menu on page 121.

Once the correct password has been entered, you can use the phone until you switch it off.

The following options are available:

Disable: you are not asked to enter the phone password when you switch the phone on.

Enable: you are required to enter the phone password when you switch the phone on.

Change password

The Change Password feature allows you to change your current phone password to a new one. You must enter the current password before you can specify a new one.

The password is preset to "00000000" at the factory. Once you have entered a new password, you are asked to confirm it by entering it again.

Privacy

Using this menu, you can lock your media contents, such as multimedia messages, MMS postcards, photos, videos, voice memos, images and sounds. Once you have locked the contents, you must enter the phone password to access the associated menus.

To	Press the
select an item to lock	Up or Down key. To lock all of the contents, select All .
place a check mark	Mark soft key.
remove a check mark	Unmark soft key.
lock the marked items	Centre key.

When the phone asks for the phone password, enter the password and press the Centre key or **Ok** soft key.

Note: The password is preset to "00000000" at the factory. To change this password, see above.

SIM lock

When the SIM Lock feature is enabled, your phone only works with the current SIM. You must enter the SIM lock code to use a different SIM card.

Once you have entered the lock code, you are asked to confirm it by entering it again.

To unlock the SIM, you must enter the SIM lock code.

FDN mode

The FDN (Fixed Dial Number) mode, if supported by your SIM card, allows you to restrict your outgoing calls to a limited set of phone numbers.

The following options are available:

Disable: you can call any number.

Enable: you can only call phone numbers stored in Contacts. You must enter your PIN2.

Note: Not all SIM cards have a PIN2. If your SIM card does not, this menu does not display.

Change PIN2

The Change PIN2 feature allows you to change your current PIN2 to a new one. You must enter the current PIN2 before you can specify a new one.

Once you have entered a new PIN2, you are asked to confirm it by entering it again.

Note: Not all SIM cards have a PIN2. If your SIM card does not, this menu does not display.

Extra settings

You can turn the automatic redialling or answering features on or off.

To turn a feature	Press the
on	On soft key. A check mark displays in front of the option.
off	Off soft key. The check mark no longer displays.

The following options are available:

Auto redial: when this option is checked, the phone makes up to ten attempts to redial a phone number after an unsuccessful call.

Note: The interval between two attempts varies.

Active folder: when this option is checked, you can simply open the folder to answer a call.

When it is unchecked, you must open the folder and press a key to answer a call, depending on the setting of the **Anykey answer** option.

Anykey answer: when this option is checked, you can answer an incoming call by pressing any key, except the  key and the **Reject** soft key. To reject the call, press the  key or the **Reject** soft key.

When this option is unchecked, you can only press the  key or **Accept** soft key.

Short cut

The navigation keys can be used as shortcut keys. In Idle mode, they allow you to access specific menus directly.

To assign a shortcut to a key:

1. Select the key to be used as a shortcut key by pressing the Up or Down key, and press the Centre key or **Select** soft key.
2. Select the menu to be assigned to the key by pressing the Up or Down key.

Note: To deactivate a shortcut key, select the **None** option.

3. Press the Centre key or **Select** soft key to save the selection.

Reset settings

You can easily reset your phone to its default settings. To reset your phone:

1. Select the **Reset settings** menu.
2. Enter the 8-digit phone password and press the Centre key or **Ok** soft key.

Note: The password is preset to "00000000." To change this password, see page 121.

Organiser

The Organiser feature enables you to:

- set an alarm so that the phone rings at a specific time, such as to remind you of an appointment.
- view the calendar and organise your schedule.
- set the current time and date.
- define a list of things to do.
- record voice memos.
- use the phone as a calculator for basic mathematical equations or currency exchange operations.

Alarm

This feature allows you to:

- set the alarm to ring at a specific time.
- set the phone to switch on automatically and ring the alarm even if the phone is switched off.

The following options are available:

Once alarm: the alarm rings only once and is then deactivated.

Daily alarm: the alarm rings every day at the same time.

Morning call: the alarm rings to wake you up in the morning.

To set an alarm:

1. Choose the type of alarm to be set and press the Centre key or **Select** soft key.
2. Enter the time for the alarm to sound.

Note: Your phone is preset to use 12-hour format. To change the format, see page 130.

If you want to use the alarm options, press the **Options** soft key. The following options are available:

- **Remove alarm:** deactivates the current alarm.
- **Alarm sound set:** allows you to select the alarm melody.

3. Press the Centre key.
4. If applicable, select **AM** or **PM** and press the Centre key or **Select** soft key.
5. If you select **Morning call** in step 1, choose the repeat option, **Monday to friday** or **Monday to saturday**, and press the Centre key or **Select** soft key.

To stop the alarm when it rings, press the **Exit** soft key or one of the Volume keys.

Remove alarm: deactivates all alarm settings.

Autopower: when this option is set to **Enable**, the alarm rings at the specified time, even if the phone is switched off.

If the option is set to **Disable** and the phone is switched off at the specified time, the alarm does not ring.

Calendar

With the Calendar feature, you can:

- consult the calendar to check your memos.
- write memos to keep track of your schedule.
- set an alarm to act as a reminder.

Consulting the Calendar

When you select the **Calendar** menu, the calendar displays. The following options are available when you press the **Options** soft key:

Search all: displays all of the memos, starting with the oldest regardless of the day. To scroll through the memos, press the Up or Down key.

Delete all: allows you to delete all of the memos. You are asked to confirm your action.

Go to date: allows you to go to a specific date.

Exit: exits the Calendar feature and returns to Idle mode.

Writing a Memo

You can make up to 30 memos for one day.

To write or edit a memo on a specific date:

1. Select a date on the calendar, using the Navigation keys.

Note: To skip to the previous or next month, press the Volume keys on the left side of the phone.

2. Press the Centre key.

An empty memo screen displays allowing you to enter your memo.

3. Enter your memo and then press the Centre key or **Ok** soft key.

Note: For further details about how to enter characters, see page 45.

You are asked if you wish to set an alarm.

4. If you want an alarm to ring on the chosen day, press the Centre key.

Otherwise, press the **Skip** soft key. The memo is saved and the display returns to the calendar.

5. If you pressed the Centre key, enter the time for the alarm and press the Centre key.

Note: Your phone is preset to use 12-hour format. To change the format, see page 130.

You can select the melody for the alarm by pressing the **Melody** soft key.

6. If applicable, select **AM** or **PM** and press the Centre key or **Select** soft key.

The colour of the date on the calendar changes to green to indicate that a memo exists for that date.

Viewing a Memo

When you select a day for which a memo already exists on the calendar, the latest memo for the day displays.

If more than one memo is stored, press the Up or Down key to scroll to the previous or next memo.

Press the Centre key to add a new memo for the day.

You can use the following options by pressing the **Options** soft key:

New: allows you to write a new memo.

Edit: allows you to change the memo text.

Alarm: allows you to set an alarm to ring at a specified time to remind you of the memo. If you set the alarm earlier, you can change or delete it.

Delete: allows you to delete the memo.

Copy to: allows you to copy the memo to another date.

Move to: allows you to change the date of the memo.

Time & date

This menu allows you to change the current time and date displayed. You can also find out what time it is in another part of the world.

The following options are available:

Set time: allows you to enter the current time. You can choose the time format in the **Time format** menu. See the following page.

Note: Before setting the time, you must specify your time zone in the **World time** menu.

Set date: allows you to enter the day, month and year.

World time: allows you to find out what time it is in another part of the world, using the Left and Right keys.

The screen shows the:

- city name.
- current time and date.
- time difference between the selected city and your city if you have set the local time (see below for further details).
- city selected as your time zone.

To select your time zone:

1. Select the city corresponding to your time zone by pressing the Left or Right key one or more times.

The local time and date display.

2. Press the Centre key or **Set** soft key.

Time format: allows you to change the time format to **24 hours** or **12 hours**.

Display options: allows you to set whether the phone displays the time or the date on the menu title bars.

Calculator

With this feature, you can use the phone as a calculator. The calculator provides basic arithmetic functions; addition, subtraction, multiplication and division.

1. Enter the first number using the numeric keys.

Notes:

- To delete mistakes or clear the display, press the **C** key.
- To include a decimal point or a bracket, press the left soft key until the symbol you want displays.

2. Press the right soft key until the arithmetic symbol you want appears: **+** (addition), **-** (subtraction), ***** (multiplication), **/** (division).
3. Enter the second number.
4. To view the result, press the Centre key.
5. Repeat steps 1 to 4 as many times as required.

To do list

This feature allows you to:

- enter a list of tasks to be done.
- assign a priority and a deadline to each task.
- sort the tasks by priority and status mark.

Creating the To do list

1. Press the Centre key.

You can also press the **Options** soft key and press the Centre key or **Select** soft key when **New** is highlighted.

2. Enter the first task.

Note: For further details about how to enter characters, see page 45.

3. Press the Centre key or **Ok** soft key.
4. Select a priority status of high, normal or low using the Up and Down keys and press the Centre key or **Select** soft key.
5. Enter your deadline and press the Centre key or **Ok** soft key.

Editing the To do list

When you select the **To do list** menu, the current contents display with the status mark, if the task has been done, and priority;  for High,  for Normal and  for Low.

Action	Procedures
View the details for a specific task	① Highlight the task. ② Press the Centre key. ③ Scroll through the tasks using the Up and Down keys, if necessary.
Change the status of a specific task	① Highlight the task. ② Press the ✕ key to mark the task as completed as of the current time and date. or ① Highlight the task. ② Press the Options soft key. ③ Select the Mark option. ④ Select the appropriate status (Done or Undo).
Create a new task	① Press the Options soft key. ② Select the New option. ③ Enter the text, priority and/or deadline for the task.
Edit an existing task	① Highlight the task. ② Press the Options soft key. ③ Select the Edit option. ④ Change the text, priority and/or deadline for the task.
Sort the existing tasks by priority or status	① Press the Options soft key. ② Select the Sort option. ③ Select the sort criterion (High, Low, Done or Undo).

Action	Procedures
Copy a task	① Highlight the task. ② Press the Options soft key. ③ Select the Copy option. ④ Change the text, priority and/or deadline for the task.
Copy a task to the calendar	① Highlight the task. ② Press the Options soft key. ③ Select the Copy to calendar option. ④ Change the text and deadline for the task and set the alarm.
Delete a task	① Highlight the task. ② Press the Options soft key. ③ Select the Delete option.
Delete all tasks	① Press the Options soft key. ② Select the Delete all option. ③ Confirm the deletion by pressing the Centre key or Yes soft key. ④ Confirm again by pressing the Centre key or Yes soft key.
Exit the To Do list	① Press the Options soft key. ② Select the Exit option.

Voice memo

In this menu, you can record voice memos. After recording, you can send a memo to other people using the Multimedia Message Service.

Record

This menu allows you to record a new memo. When you select this menu, the display shows the 30-second timer.

1. To start recording, press the Centre key or **Record** soft key.
2. Record a memo by speaking into the microphone.
3. When you press the Centre key or **Stop** soft key, or if the recording time expires, the following options display:
 - **Replay**: plays back your memo.
 - **Re-record**: discards the memo and enables you to record another one.
 - **Save**: allows you to save the memo.
 - **Quit**: cancels your recording and exits the **Record** menu.
4. To save the memo, choose **Save** from the options and press the Centre key or **Select** soft key.
5. Press the **C** key to clear the default name, if necessary, and enter a name for the memo.

For further details about how to enter characters, see page 45.

6. Press the Centre key or **Ok** soft key.

The memo is saved and then the display shows the memo information.

7. Press the Centre key to send the voice memo in a multimedia message.

Press the **Options** soft key to use the following memo options:

- **Send**: allows you to send the memo to other people by using the MMS feature. Follow the procedure on page 68.
- **Rename**: allows you to change the memo's name.
- **Delete**: deletes the memo.

8. To exit, press the **Back** soft key or  key.

Memo list

This menu shows your voice memo list. Scroll to a memo and press the Centre key to review the memo.

Press the **Options** soft key to use the following options:

Play: plays the memo.

Send: allows you to send the memo to other people by using the MMS feature. See page 68 for further details about sending a message.

Rename: allows you to change the memo's name.

Information: displays information about the memo, such as the name, date when the memo was made, recording duration and memory size.

Delete: deletes the memo.

Delete all

In this menu, you can delete all of your voice memos.

When the confirming message appears, press the Centre key or **Yes** soft key. When the display confirms again, press the Centre key or **Yes** soft key.

Memory status

You can check the amount of the memory being used and the memory remaining for voice memos.

The display shows the total, free and used memory, including the number of memos you recorded and the total number of memos you can record. Press the Up or Down key to scroll through the screen.

Currency exchange

Using this menu, you can figure out currency conversions.

1. Enter the current exchange rate of your source currency and press the Centre key or **Ok** soft key.

You can insert a decimal point by pressing the **#** key.

2. Enter the amount to convert and press the Centre key or **Ok** soft key.

The amount you entered and its equivalent value display.

3. Press the **Exit** soft key to exit the currency convertor.



Network services

These menu functions are network services. Please contact your service provider to check their availability and subscribe to them, if you wish.

Call diverting

This network service enables incoming calls to be rerouted to a number that you specify.

Example: You may wish to divert your business calls to a colleague while you are on holidays.

You can use the following options to divert voice calls and/or data calls:

Divert always: all calls are diverted.

Busy: calls are diverted when you are already on another call.

No reply: calls are diverted when you do not answer the phone.

Unreachable: calls are diverted when you are not in an area covered by your service provider.

Cancel all: all call diverting options are cancelled.

To set your call diverting options:

1. Select a call diverting option by pressing the Up or Down key, and then press the Centre key or **Select** soft key.

2. Select the type of calls, voice or data, by pressing the Up or Down key, and then press the Centre key or **Select** soft key.

The current status displays. If the option has already been set, the number to which the calls are diverted displays.

3. If you selected **No reply** in step 1, select the length of time the network waits before diverting a call and press the Centre key or **Select** soft key.

4. To	Press the
activate call diverting	Centre key or Activate soft key. Go to step 4.
change the number to be called	Centre key or Change soft key. Go to step 4.
deactivate call diverting	Remove soft key.

5. Enter the number to which the calls are to be diverted and press the Centre key or **Ok** soft key.

To enter an international code, press the **0** key until the **+** sign displays.

The phone sends your settings to the network and the network's acknowledgement displays.

You can deactivate all call diverting settings by selecting the **Cancel all** option.

Call barring

The call barring network service allows you to restrict your calls.

You can use the following options to restrict voice calls and/or data calls:

All outgoing: calls cannot be made.

International: international calls cannot be made.

International except to home: when abroad, calls can be made only to numbers within the current country and to your home country, which is the country where your home network provider is located.

All incoming: calls cannot be received.

Incoming while abroad: calls cannot be received when you are using your phone outside of your home service area.

Cancel all: all call barring settings are deactivated; calls can be made and received normally.

To set your call barring options:

1. Select a call barring option by pressing the Up or Down key, and then press the Centre key or **Select** soft key.
2. Select the type of calls, voice or data, by pressing the Up or Down key, and then press the Centre key or **Select** soft key.
3. Press the **Activate** soft key to confirm your settings.

4. Enter your call barring password supplied by your service provider.

The phone sends your settings to the network and the network's acknowledgement displays.

To deactivate specific call barring settings:

1. Select the call barring option to be deactivated.
2. Select the type of calls to which this option applies.
3. Press the **Deactivate** soft key.
4. Enter your call barring password supplied by your service provider.

The phone sends your settings to the network and the network's acknowledgement displays.

You can also deactivate all call barring settings by selecting the **Cancel all** option.

Change barring password: you can set and change the call barring password obtained from your service provider using this option. You must enter the current password before you can specify a new one.

Once you have entered a new password, you are asked to confirm it by entering it again.

Call waiting

This network service informs you when someone is trying to reach you during another call.

You can specify individual call waiting options for voice calls and/or data calls.

To set your call waiting options:

1. Select the type of calls, voice or data, to which you want to apply the call waiting option by pressing the Up or Down key, and then press the Centre key or **Select** soft key.

The screen informs you whether call waiting is activated or deactivated.

2. You can activate or deactivate the call waiting feature as necessary by using the Centre key.

To return to the previous screen, press the **Back** soft key.

You can also deactivate all call waiting settings by selecting the **Cancel all** option.

Network selection

The Network Selection feature enables you to automatically or manually select the network used when roaming outside of your home area.

Note: You can select a network other than your home network only if there is a valid roaming agreement between them.

To automatically or manually select the network when roaming:

1. When **Network selection** displays, press the Centre key or **Select** soft key.
2. Press the Up or Down key until the appropriate option highlights and then press the Centre key or **Ok** soft key.

If you select **Automatic**, you are connected to the first available network when roaming.

If you select **Manual**, the phone scans for the available networks. Go to step 3.

3. Press the Up or Down key until the network you want highlights and then press the Centre key or **Ok** soft key.

You are connected to that network.

Caller ID

You can prevent your phone number from being displayed on the phone of the person being called.

Note: Some networks do not allow the user to change this setting.

The following options are available:

Default: the default setting provided by the network is used.

Hide number: your number does not display on the other person's phone.

Send number: your number is sent each time you make a call.

Closed user group (CUG)

This network service allows incoming and outgoing calls to be restricted to a selected user group. You can create up to ten user groups.

For details on how to create and use a closed user group, contact your service provider.

Example: A company lends SIM cards to its employees and wants to restrict outgoing calls to members of the same team.

Activating a Closed User Group

If you select the **Closed user group** menu, you can enter the CUG function. You can now access the following options after pressing the Centre key:

Index list: lets you list, add or delete CUG index numbers.

If there is no CUG index stored, you are prompted to add a new index when you select this option. Once you have added a CUG index, the list of current CUG indexes appears.

Add a new CUG index as advised by your service provider or delete a group.

To	Press the
scroll through the existing CUG indexes	Up or Down key.
add a new CUG index	Options soft key, select the Add option and enter the index.
delete a CUG index	Options soft key and select the Delete option.
activate a CUG index	Options soft key and select the Activate option.

Outside access: lets you enable or disable calls to numbers other than those in the Closed User Group. This feature depends on the nature of your CUG subscription. Please check with your service provider.

Default group: you may set a default CUG with your service provider. If you have done so, you can enable the **Default group** option on your phone. When making a call, you are given the option of using your default CUG, instead of selecting one from the list.

Deactivate: deactivates the CUG function. This menu appears only when the default group is enabled or a CUG index is selected.

Vodafone live!

The **Vodafone live!** menu contains several fun options.

Browser

Your phone is equipped with a WAP (Wireless Application Protocol) browser to allow you to access and navigate the Wireless Web using your phone.

Selecting the **Browser** menu connects the phone to the network and loads the homepage of the Wireless Web service provider. You can also press the **live!** soft key in Idle mode.

The contents of the WAP Browser startup homepage depends on your Wireless Web service provider. To scroll through the screen, use the Up and Down keys.

Note: To access the startup homepage from any other screen in the WAP browser, use the **Home** option. For further details about the WAP Browser menus, see page 149.

Exiting the WAP Browser

To exit the browser at any time, simply press and hold the  key.

Navigating the WAP Browser

To	Press the
scroll through and select browser items	Up or Down key and then press the Centre key or Select soft key to confirm the selection.
select a numbered item	corresponding numeric key.
return to the previous page	Back soft key.
access the Favourite list	# key for more than 2 seconds. See page 157.
return to the startup homepage	* key for more than 2 seconds and select Home . For further details about this option, see page 149.

Entering Text in the WAP Browser

When you are prompted to enter text, the current text input mode is indicated on the screen. To change the text input mode, press the Centre key one or more times.

The following modes are available:

Upper-case Character mode (A): allows you to enter upper-case English characters.

Lower-case Character mode (a): allows you to enter lower-case English characters.

Note: You can also enter special characters in Upper-case or Lower-case Character mode. For details about available characters, see page 47.

T9 mode (T9): allows you to enter English characters by pressing one key per letter. In this mode, you can use only the **0** key to display alternative words. To change the case, press the ***** key.

Number mode (1): allows you to enter numbers.

Selecting and Using Browser Menu Options

Various menu options are available when you are using the WAP Browser to navigate the Wireless Web.

To access a menu option:

1. Press and hold the ***** key.
A menu list displays.
2. Highlight a menu by pressing the Up or Down key.
3. Select an option by pressing the Centre key or **Select** soft key.
4. If necessary, select a secondary option using the Up and Down keys, and press the Centre key or **Select** soft key to confirm.

Note: The menus may vary, depending on your version of the WAP browser.

The following options are available:

Reload: reloads the current page.

Home: takes you back at any time to the home page of the Wireless Web service provider.

Goto URL: allows you to manually enter the URL address of a Web page. After entering an address, press the **Ok** soft key to go there directly.

Show URL: displays the URL address of the Web page to which you are currently connected to. It also enables you to set the current site as the startup home page.

To	Press the
set the current page as your startup home page	Option soft key and select the Save to home option.
set a bookmark for the current page	Option soft key and select the Save to bookmark option.
cancel your setting	Back soft key.

Edit home: allows you to change the startup home page manually. Enter the URL and press the **Ok** soft key. For further details about entering text, see page 148.

Clear cache: deletes the information stored in the cache, which stores the most recently accessed Web pages.

Inbox: allows you to read messages received from the web server.

My stuff

You can download images, sounds and MIDlets (Java applications running on mobile phones) from various sources using the WAP browser and store them in your phone. In the **My stuff** menu, you can access the downloaded items.

Games & more

You can enjoy downloaded Java applications or download applications from the web site provided by your service provider. You can also change the DNS setting required for accessing Java services, if necessary.

Note: Java services may not be available depending upon your service provider.

The following options are available:

Saved applications: when you select this option, the list of the default games appears. Once you have downloaded MIDlets, they are added to the list.

To launch a MIDlet:

Note: The following procedure is for the default games. For downloaded games, the procedure may be different.

1. Scroll to the MIDlet you want on the Games list and press the Centre key.

2. On the startup screen of the MIDlet, scroll to an option using the Navigation keys or the **2** and **8** keys.

The following options are available:

- **START GAME:** starts a new game.
- **CONTINUE:** allows you to continue the last game you were playing.
- **HIGH SCORE:** shows the high score table. This option may not be available for some games.
- **HOW TO PLAY:** shows how to play the game and the key functions for the game.
- **OPTION:** allows you to switch the game sound on or off.

3. Press the **5** key or Centre key to confirm your selection.

While you are playing a game, to	Press the
adjust the sound volume	Volume keys.
stop the game and return to the startup screen	C key.
exit the game	 key.

To view MIDlet information:

1. Scroll to the MIDlet you want on the Games list and press the **Info** soft key.

The display shows information about the MIDlet, such as the file size, application version and its vendor.

2. To scroll to other MIDlet information, press the Navigation keys.
3. If you want to delete the MIDlet, press the **Delete** soft key and then press the Centre key or **Yes** soft key to confirm the deletion.

Note: When you select the default games from the list, the **Delete** option is not available, so that you cannot delete them.

4. To exit and return to the Games list, press the **Back** soft key.

If you need to enter text while using a MIDlet, you can use the following input modes:

- Upper-case character mode (**A**): allows you to enter upper-case English characters.
- Lower-case character mode (**a**): allows you to enter lower-case English characters.
- Number mode (**1**): allows you to enter numbers.
- Symbol mode: allows you to enter symbols. After highlighting a symbol by pressing the Navigation keys, press the Centre key to insert it.
- T9 mode (**T9**): allows you to enter English characters by pressing one key per letter. In this mode, you can change the case by pressing the **0** key.

To change the text input mode, press the **✕** key until the appropriate indicator appears.

Download more: you can download more Java applications from the web site given by your service provider.

DNS settings: the DNS (Domain Name Server) is the server that assigns the Java server domain name to an IP address. The DNS setting is preset at the factory, but sometimes you may need to change it at your service provider's instructions.

1. Enter the primary address using the number keypad and press the Centre key or **Ok** soft key.
2. Enter the secondary address and press the Centre key or **Ok** soft key.

Sounds

You can use the downloaded sounds or access a specified web site to download more sounds.

Saved sounds: you can listen to the sounds downloaded from the web server or received in multimedia messages. You can set the downloaded sounds as the current ring tone.

By pressing the **Options** soft key, you can use the following options:

Rename: allows you to change the name of the sound.

Delete: deletes the sound.

Set as ringtone: sets the sound as your ring tone.

Download more: allows you to download more sounds from the web site given by your service provider.

Images

You can use the downloaded images or access a specified web site to download more images.

Saved images: you can view the images downloaded from the web server or received in messages. You can set the downloaded pictures as the current background image.

If you set a photo as your wallpaper, it displays as **My photo** on the list.

By pressing the **Options** soft key, you can use the following options:

Rename: allows you to change the name of the image.

Delete: deletes the image.

Set as wallpaper: sets the image as your wallpaper.

Download more: allows you to download more images from the web site given by your service provider.

Delete all

This menu allows you to delete all of the downloaded contents in the **Games**, **Sounds** and **Images** folders. You can delete all of the contents at one time.

1. To	Press the
select a folder to clear	Up or Down key. To delete all of your items, select All .
place a check mark	Mark soft key.
remove a check mark	Unmark soft key.

2. Press the Centre key to delete the marked items.
3. When a confirming message displays, press the Centre key or **Yes** soft key to confirm.
4. When the display confirms again, press the Centre key or **Yes** soft key.

Memory status

You can check the amount of the memory being used and the memory remaining for the contents in the **My stuff** menu.

Games: the display shows the total, free and used space for games and the number of the games you downloaded. Press the Up or Down key to scroll through the screen.

Sounds & images: the display shows the total, free and used space, including the memory status used for objects in the **Sounds** and **Images** menus. Press the Up or Down key to scroll through the screen.

Favourites

This menu stores up to 9 URL addresses of the web sites provided by your service provider.

Using this menu, you can access one of the default web sites or store up to 4 addresses of your favourite web sites.

To access a web site, select one from the list and press the Centre key.

To store your favourite web site:

1. Select an empty location and press the Centre key or **Options** soft key.
2. Enter the address you want to store and press the Centre key or **Enter** soft key.

For further details about how to enter characters, see page 45.
3. Enter a name for the Favorite item and press the Centre key or **Ok** soft key.

Once you have stored a Favourite item, you can use the following options when you press the **Options** soft key:

Go to URL: takes you to the corresponding web site.

Edit: allows you to change the address and the name of the item.

Delete: allows you to delete the item.

Clear cache

You can clear the information stored in the cache, the phone's temporary memory which stores the most recently accessed Web pages.

Press the Centre key or **Yes** soft key to confirm the deletion. Otherwise, press the **No** soft key.

WAP profile

This menu allows you to set up five proxy servers for the WAP browser. Contact your service provider for details about your WAP profile options.

Note: The availability of the setting options may vary depending on your country.

For each server, the following options are available:

Profile name: enter a name that you wish to assign to the HTTP proxy server.

Homepage URL: set the address of your startup homepage. When the default homepage displays, you can delete it using the **C** key and enter your own choice.

Security: select a data transmission mode. Choose **Secure** to protect your data against unauthorised access; otherwise, choose **Non-secure**.

Bearer: select a bearer to be used for each type of network address accessed; **GPRS**, **Data** or **GPRS preferred**. When you select **GPRS preferred**, the phone searches for a GPRS network first. If a GPRS network is not available, the phone uses a GSM (Data) network.

The remaining options depend on the Bearer setting.

When the bearer is set to **GPRS** or **GPRS preferred**:

IP address: enter the WAP gateway address required to connect to the Internet.

User name: enter the user ID required to connect to the GPRS network.

Password: enter the password required to connect to the GPRS network.

APN: enter the access point name used for the address of the GPRS network gateway.

When the bearer is set to **Data**:

IP address: enter the WAP gateway address required to connect to the Internet.

Login name: enter the PPP server login ID.

Password: enter the PPP server password.

Dial-up number: enter the PPP server phone number.

Data call type: select a data call type; **Analogue** or **ISDN**.

Note: The WAP browser settings may vary, depending on the service provider. Contact your service provider for further details.

Solving Problems

If you are experiencing problems with your phone, perform the following simple checks before contacting a service professional. This may save you the time and expense of an unnecessary service call.

When you switch your phone on, the following messages may appear:

Insert SIM card

- Check that the SIM card is correctly installed.

Phone locked Enter password

- The automatic locking function has been enabled. You must enter the phone's password before you can use the phone.

Enter PIN

- You are using your phone for the first time. You must enter the Personal Identification Number (PIN) supplied with the SIM card.
- The PIN Check feature is enabled. Every time the phone is switched on, the PIN has to be entered. To disable this feature, use the **PIN check** menu.

Enter PUK

- The PIN code was entered incorrectly three times in succession and the phone is now blocked. Enter the PUK supplied by your service provider.

"No service," "Network failure" or "Not done" displays

- The network connection was lost. You may be in a weak signal area (in a tunnel or surrounded by buildings). Move and try again.
- You are trying to access an option for which you have not taken out a subscription with your service provider. Contact the service provider for further details.

You have entered a number but it was not dialled

- Have you pressed the  key?
- Are you accessing the right cellular network?
- You may have set an outgoing call barring option.

Your correspondent cannot reach you

- Is your phone switched on (the  key pressed for more than one second)?
- Are you accessing the right cellular network?
- You may have set an incoming call barring option.

Your correspondent cannot hear you speaking

- Have you switched off the microphone?
- Are you holding the phone close enough to your mouth? The microphone is located at the bottom of the phone.

The phone starts beeping and “**Warning** Low battery” flashes on the display

- Your battery is insufficiently charged. Recharge the battery.

The audio quality of the call is poor

- Check the signal strength indicator on the display (📶); the number of bars indicates the signal strength from strong (📶) to weak (📶).
- Try moving the phone slightly or moving closer to a window if you are in a building.

No number is dialled when you recall a Contacts entry

- Check that the number has been stored correctly, by using the Contacts Search feature.
- Re-store the number, if necessary.

If the above guidelines do not help you to solve the problem, take note of:

- the model and serial numbers of your phone
- your warranty details
- a clear description of the problem

Then contact your local dealer or Samsung after-sales service.

Access Codes

There are several access codes that are used by your phone and its SIM card. These codes help you protect the phone against unauthorised use.

When requested for any of the codes explained below, enter the appropriate code (displayed as asterisks) and press the Centre key or **Ok** soft key. If you make a mistake, press the **C** key one or more times until the incorrect digit is cleared and then continue entering the correct code.

The access codes, except for the PUK and PUK2 codes, can be changed using the **Security** menu. See page 119 for further details.

Important! Avoid using access codes resembling emergency numbers, such as 112, so that you do not accidentally dial an emergency number.

Phone Password

The Phone Lock feature uses the phone password to protect your phone against unauthorised use. The phone password is supplied with the phone and is preset to “00000000” at the factory.

To	See
activate/deactivate the Phone Lock feature	page 120.
change the phone password	page 121.

PIN

The **P**ersonal **I**dentification **N**umber or PIN (4 to 8 digits) protects your SIM card against unauthorised use. It is usually supplied with the SIM card.

If you enter an incorrect PIN three times in succession, the code is disabled and cannot be used until you re-enable it by entering the PUK (see below).

To	See
activate/deactivate the PIN Check feature	page 119.
change the PIN	page 120.

PUK

The 8-digit PUK (**P**IN **U**nblocking **K**ey) is required to change a disabled PIN. The PUK may be supplied with the SIM card. If not, or you have lost it, contact your service provider.

To re-enable your PIN:

1. Enter the PUK and press the Centre key or **Ok** soft key.
2. Enter a new PIN of your choice and press the Centre key or **Ok** soft key.
3. When the **Confirm new PIN** message displays, enter the same code again and press the Centre key or **Ok** soft key.

If you enter an incorrect PUK ten times in succession, the SIM card becomes invalid. Contact your service provider for a new card.

PIN2

The PIN2 (4 to 8 digits), supplied with some SIM cards, is required to access specific functions, such as setting the maximum cost of a call. These functions are available if supported by your SIM card.

If you enter an incorrect PIN2 three times in succession, the code is disabled and you cannot access the functions until you re-enable it by entering the PUK2.

To change the PIN2, see page 122.

PUK2

The 8-digit PUK2 (**P**IN **U**nblocking **K**ey **2**), supplied with some SIM cards, is required to change a disabled PIN2. If you lose the code, contact your service provider.

To re-enable your PIN2:

1. Enter the PUK2 and press the Centre key or **Ok** soft key.
2. Enter a new PIN2 of your choice and press the Centre key or **Ok** soft key.
3. When the **Confirm PIN2** message displays, enter the same code again and press the Centre key or **Ok** soft key.

If you enter an incorrect PUK2 ten times in succession, you will not be able to access the functions requiring the PIN2. Contact your service provider for a new card.

Barring Password

A 4-digit barring password is required when you use the Call Barring function. You can obtain the password from your service provider when you subscribe to this function.

You can change this password in the **Call barring** menu. See page 141 for further details.

Health and Safety Information

Exposure to Radio-Frequency Energy (SAR Information)

This phone meets European Union (EU) requirements concerning exposure to radio waves.

Your mobile phone is a radio transmitter and receiver. It is designed and manufactured so as not to exceed the limits for exposure to radio-frequency (RF) energy, as recommended by the EU Council. These limits are part of comprehensive guidelines and establish permitted levels of RF energy for the general population. The guidelines were developed by independent scientific organisations through the periodic and thorough evaluation of scientific studies. The limits include a substantial safety margin designed to ensure the safety of all persons, regardless of age and health.

The exposure standard for mobile phones employs a unit of measurement known as SAR (Specific Absorption Rate). The SAR limit recommended by the EU Council is 2.0W/kg.*

* The SAR limit for mobile phones used by the public is 2.0 watts/kilogram (W/kg) averaged over ten grams of body tissue. The limit incorporates a substantial margin of safety to give additional protection for the public and to account for any variations in measurements. The SAR values may vary depending on national reporting requirements and the network band.

SAR tests are conducted using standard operating positions with the phone transmitting at its highest certified power level in all tested frequency bands. Although the SAR is determined at the highest certified power level, the actual SAR level of the phone while operating can be well below the maximum value. This is because the phone is designed to operate at multiple power levels so as to use only the power required to reach the network. In general, the closer you are to a base station, the lower the power output of the phone.

Before a new model phone is available for sale to the public, compliance with the European R&TTE Directive must be shown. This directive includes as one of its essential requirements the protection of the health and safety of the user and any other person.

Precautions When Using Batteries

- Never use any charger or battery that is damaged in any way.
- Use the battery only for its intended purpose.
- If you use the phone near the network's base station, it uses less power; talk and standby time are greatly affected by the signal strength on the cellular network and the parameters set by the network operator.
- Battery charging time depends on the remaining battery charge, the type of battery and the charger used. The battery can be charged and discharged hundreds of times, but it will gradually wear out. When the operation time (talk time and standby time) is noticeably shorter than normal, it is time to buy a new battery.

- If left unused, a fully charged battery will discharge itself over time.
- Use only Samsung-approved batteries and recharge your battery only with Samsung-approved chargers. When a charger is not in use, disconnect it from the power source. Do not leave the battery connected to a charger for more than a week, since overcharging may shorten its life.
- Extreme temperatures will affect the charging capacity of your battery: it may require cooling or warming first.
- Do not leave the battery in hot or cold places, such as in a car in summer or winter conditions, as you will reduce the capacity and lifetime of the battery. Always try to keep the battery at room temperature. A phone with a hot or cold battery may temporarily not work, even when the battery is fully charged. Li-ion batteries are particularly affected by temperatures below 0 °C (32 °F).
- Do not short-circuit the battery. Accidental short-circuiting can occur when a metallic object (coin, clip or pen) causes a direct connection between the + and – terminals of the battery (metal strips on the battery), for example when you carry a spare battery in a pocket or bag. Short-circuiting the terminals may damage the battery or the object causing the short-circuiting.
- Dispose of used batteries in accordance with local regulations. Always recycle. Do not dispose of batteries in a fire.

Road Safety

Your wireless phone gives you the powerful ability to communicate by voice, almost anywhere, anytime. But an important responsibility accompanies the benefits of wireless phones, one that every user must uphold.

When driving a car, driving is your first responsibility. When using your wireless phone behind the wheel of a car, practice good common sense and remember the following tips:

1. Get to know your wireless phone and its features, such as speed dial and redial. If available, these features help you to place your call without taking your attention off the road.
2. When available, use a hands-free device. If possible, add an extra layer of convenience and safety to your wireless phone with one of the many hands-free accessories available.
3. Position your wireless phone within easy reach. Be able to access your wireless phone without removing your eyes from the road. If you get an incoming call at an inconvenient time, let your voice mail answer it for you.
4. Let the person you are speaking with know you are driving; if necessary, suspend the call in heavy traffic or hazardous weather conditions. Rain, sleet, snow, ice and even heavy traffic can be hazardous.
5. Do not take notes or look up phone numbers while driving. Jotting down a To Do list or flipping through your Contacts takes your attention away from your primary responsibility—driving safely.

6. Dial sensibly and assess the traffic; if possible, place calls when you are not moving or before pulling into traffic. Try to plan calls when your car will be stationary. If you need to make a call while moving, dial only a few numbers, check the road and your mirrors, then continue.
7. Do not engage in stressful or emotional conversations that may be distracting. Make the people with whom you are talking to aware that you are driving and suspend conversations that have the potential to divert your attention from the road.
8. Use your wireless phone to call for help. Dial an emergency number in case of fire, traffic accident or medical emergencies. Remember, it is a free call on your wireless phone!
9. Use your wireless phone to help others in emergencies. If you see a car accident, crime in progress or other serious emergencies where lives are in danger, call an emergency number, as you would want others to do for you.
10. If you see a broken-down vehicle posing no serious hazard, a broken traffic signal, a minor traffic accident where no one appears injured, or a vehicle you know to be stolen, call roadside assistance or any other special non-emergency wireless number.

Operating Environment

Remember to follow any special regulations in force in any area and always switch off your phone whenever it is forbidden to use it, or when it may cause interference or danger.

When connecting the phone or any accessory to another device, read its user's guide for detailed safety instructions. Do not connect incompatible products.

As with other mobile radio transmitting equipment, users are advised that for the satisfactory operation of the equipment and for the safety of personnel, it is recommended that the equipment should only be used in the normal operating position (held to your ear with the antenna pointing over your shoulder).

Electronic Devices

Most modern electronic equipment is shielded from radio frequency (RF) signals. However, certain electronic equipment may not be shielded against the RF signals from your wireless phone. Consult the manufacturer to discuss alternatives.

Pacemakers

Pacemaker manufacturers recommend that a minimum distance of 15 cm (6 inches) be maintained between a wireless phone and a pacemaker to avoid potential interference with the pacemaker. These recommendations are consistent with the independent research and recommendations of Wireless Technology Research.

Persons with pacemakers:

- Should always keep the phone more than 15 cm (6 inches) from their pacemaker when the phone is switched on
- Should not carry the phone in a breast pocket
- Should use the ear opposite the pacemaker to minimise potential interference

If you have any reason to suspect that interference is taking place, switch your phone off immediately.

Hearing Aids

Some digital wireless phones may interfere with some hearing aids. In the event of such interference, you may wish to consult your hearing aid manufacturer to discuss alternatives.

Other Medical Devices

If you use any other personal medical devices, consult the manufacturer of your device to determine if it is adequately shielded from external RF energy. Your physician may be able to assist you in obtaining this information. Switch your phone off in health care facilities when any regulations posted in these areas instruct you to do so. Hospitals or health care facilities may be using equipment that could be sensitive to external RF energy.

Vehicles

RF signals may affect improperly installed or inadequately shielded electronic systems in motor vehicles. Check with the manufacturer or its representative regarding your vehicle.

You should also consult the manufacturer of any equipment that has been added to your vehicle.

Posted Facilities

Switch off your phone in any facility where posted notices require you to do so.

Potentially Explosive Environments

Switch your phone off when in any area with a potentially explosive atmosphere and obey all signs and instructions. Sparks in such areas could cause an explosion or fire resulting in bodily injury or even death.

Users are advised to switch the phone off while at a refuelling point (service station). Users are reminded of the need to observe restrictions on the use of radio equipment in fuel depots (fuel storage and distribution areas), chemical plants or where blasting operations are in progress.

Areas with a potentially explosive atmosphere are often but not always clearly marked. They include the areas below decks on boats, chemical transfer or storage facilities, vehicles using liquefied petroleum gas, such as propane or butane, areas where the air contains chemicals or particles, such as grain, dust or metal powders, and any other area where you would normally be advised to turn off your vehicle engine.

Emergency Calls

This phone, like any wireless phone, operates using radio signals, wireless and landline networks as well as user-programmed functions, which cannot guarantee connection in all conditions. Therefore, you should never rely solely on any wireless phone for essential communications (medical emergencies, for example).

Remember, to make or receive any calls the phone must be switched on and in a service area with adequate signal strength. Emergency calls may not be possible on all wireless phone networks or when certain network services and/or phone features are in use. Check with local service providers.

To make an emergency call, proceed as follows.

1. If the phone is not on, switch it on.
2. Key in the emergency number for your present location (for example, 112 or any other official emergency number). Emergency numbers vary by location.
3. Press the  key.

If certain features are in use (call barring, for example), you may first need to deactivate those features before you can make an emergency call. Consult this document and your local cellular service provider.

When making an emergency call, remember to give all the necessary information as accurately as possible. Remember that your phone may be the only means of communication at the scene of an accident; do not cut off the call until given permission to do so.

Other Important Safety Information

- Only qualified personnel should service the phone or install the phone in a vehicle. Faulty installation or service may be dangerous and may invalidate any warranty applicable to the device.
- Check regularly that all wireless phone equipment in your vehicle is mounted and operating properly.
- Do not store or carry flammable liquids, gases or explosive materials in the same compartment as the phone, its parts or accessories.
- For vehicles equipped with an air bag, remember that an air bag inflates with great force. Do not place objects, including both installed or portable wireless equipment in the area over the air bag or in the air bag deployment area. If wireless equipment is improperly installed and the air bag inflates, serious injury could result.
- Switch your phone off before boarding an aircraft. The use of wireless phones in an aircraft may be dangerous to the operation of the aircraft, and is illegal.
- Failure to observe these instructions may lead to the suspension or denial of telephone services to the offender, or legal action, or both.

Care and Maintenance

Your phone is a product of superior design and craftsmanship and should be treated with care. The suggestions below will help you fulfill any warranty obligations and allow you to enjoy this product for many years.

- Keep the phone and all its parts and accessories out of the reach of small children.
- Keep the phone dry. Precipitation, humidity and liquids contain minerals that corrode electronic circuits.
- Do not use the phone with a wet hand. Doing so may cause an electric shock to you or damage to the phone.
- Do not use or store the phone in dusty, dirty areas, as its moving parts may be damaged.
- Do not store the phone in hot areas. High temperatures can shorten the life of electronic devices, damage batteries, and warp or melt certain plastics.
- Do not store the phone in cold areas. When the phone warms up to its normal operating temperature, moisture can form inside the phone, which may damage the phone's electronic circuit boards.
- Do not drop, knock or shake the phone. Rough handling can break internal circuit boards.
- Do not use harsh chemicals, cleaning solvents or strong detergents to clean the phone. Wipe it with a soft cloth slightly dampened in a mild soap-and-water solution.

Health and Safety Information

- Do not paint the phone. Paint can clog the device's moving parts and prevent proper operation.
- Do not put the phone in or on heating devices, such as a microwave oven, a stove or a radiator. The phone may explode when overheated.
- Use only the supplied or an approved replacement antenna. Unauthorised antennas or modified accessories may damage the phone and violate regulations governing radio devices.
- If the phone, battery, charger or any accessory is not working properly, take it to your nearest qualified service facility. The personnel there will assist you, and if necessary, arrange for service.

Glossary

To help you understand the main technical terms and abbreviations used in this booklet, and to take full advantage of the features of your mobile phone, here are a few definitions:

Active Folder

Ability to answer a call simply by opening the phone.

Call Barring

Ability to restrict outgoing and incoming calls.

Call Diverting

Ability to reroute calls to another number.

Call Holding

Ability to put one call on standby while answering or making another call; you can then switch between the two calls, as required.

Call Waiting

Informs you that you have an incoming call when you are engaged on another call.

Caller Line Identification Services (Caller ID)

Services allowing subscribers to view or block the telephone numbers of callers.

Dual Band

Ability to operate with both DCS (1800 Mhz) and GSM (900 Mhz) networks. The phone automatically uses the network with the strongest signal and even switches networks during a call within the same operator's network.

EMS (Enhanced Message Service)

An adaptation of the Short Message Service (SMS) that allows you to send and receive ring tones and the service provider's logo, as well as combinations of simple media to and from EMS-compliant handsets. Because EMS is based on SMS, it can use SMS centres the same way that SMS does. EMS works on all Global System for Mobile communications (GSM) networks. EMS senders can use text, melodies, pictures, sounds, and animations to enhance the expressive power of messages that are limited by the display constraints of mobile devices.

GPRS (General Packet Radio Service)

New non-voice value-added service that allows information to be sent and received across a mobile telephone network. GPRS provides continuous connection to the Internet for mobile phone and computer users. It is based on the Global System for Mobile Communication (GSM) circuit-switched cellular phone connections and the Short Message Service (SMS).

GSM (Global System for Mobile Communication)

International standard for cellular communication, guaranteeing compatibility between the various network operators. GSM covers most European countries and many other parts of the world.

Java

Programming language generating applications that can run on all hardware platforms, whether small, medium or large, without modification. It has been promoted for and geared heavily to the Web, both for public Web sites and Intranets. When a Java program runs from a Web page, it is called a *Java applet*. When it is run on a mobile phone or pager, it is called a MIDlet.

MMS (Multimedia Message Service)

A message service for the mobile environment, standardized by the WAP Forum and the 3rd Generation Partnership Program (3GPP). For phone users, MMS is similar to Short Message Service (SMS)-it provides automatic, immediate delivery of user-created content from phone to phone. The message addressing used is primarily phone numbers, thus the traffic goes from phone to phone. MMS also provides support for e-mail addressing, so that messages can be sent by e-mail. In addition to the text content of SMS, MMS messages can contain still images, voice or audio clips, and also video clips and presentation information.

Multi-party Calling

Ability to establish a conference call involving up to five additional parties.

Phone Password

Security code used to unlock the phone when you have selected the option to lock it automatically each time it switches on.

PIN (Personal Identification Number)

Security code that protects the phone against unauthorised use. The PIN is supplied by the service provider with the SIM card. It may be a four to eight-digit number and can be changed, as required.

Proxy Server

A proxy server resides between a Web client, such as a web browser, and a real Web server and acts as an intermediary between them. When some people browse a web site, their browser is not actually connecting to the web server. The request from their browser goes to a proxy server, and the proxy server makes the request to the web server.

A proxy server can improve performance for groups of users because it caches the results of all requests for a certain amount of time. If a user requests a web page that it already loaded for another user, it reloads the page instead of forwarding the request to the Web server, which can be a time-consuming operation.

PUK (PIN Unblocking Key)

Security code used to unlock the phone when an incorrect PIN has been entered three times in succession. The eight-digit number is supplied by the service provider with the SIM card.

Roaming

Use of your phone when you are outside your home area (when travelling for example).

SDN (Service Dialling Numbers)

Telephone numbers supplied by your network provider and giving access to special services, such as voice mail, directory inquiries, customer support and emergency services.

SIM (Subscriber Identification Module)

Card containing a chip with all the information required to operate the phone (network and memory information, as well as the subscriber's personal data). The SIM card fits into a small slot on the back of the phone and is protected by the battery.

SMS (Short Message Service)

Network service sending and receiving messages to and from another subscriber without having to speak to the correspondent. The message created or received can be displayed, received, edited or sent.

Soft Keys

Two keys marked  and  on the phone, the purpose of which:

- varies according to the function that you are currently using.
- is indicated on the bottom line of the display just above the corresponding key.

Voice Mail

Computerised answering service that automatically answers your calls when you are not available, plays a greeting (optionally in your own voice) and records a message.

A

Access codes • 163
Active folder • 123
Alarm • 125
Alert type • 110
Alphabet mode, text input • 47
Answering
 call • 26
 second call • 56
Anykey answer • 123
Auto redial • 123

B

Background image • 115
Backlight
 description • 15
 time, set • 116
Barring, calls • 140
Battery
 charging • 20
 installing • 19
 low indicator • 21
 precautions • 168
 removing • 18
Broadcast messages • 90
Browser, WAP • 147

C

Calculator • 131
Calendar memos
 copying • 129
 deleting • 129
 viewing • 128
 writing • 127
Call back, message • 81
Call costs • 100
Caller groups
 editing • 39
 searching • 38
Caller ID • 144
Call log
 dialled • 97
 missed • 27, 96
 received • 97

Calls

answering • 26
barring • 140
diverting • 138
ending • 24
holding • 51
making • 23
redialling • 24
rejecting • 26
waiting • 56, 142

Call time • 99

Camera

playing video • 107
recording video • 106
taking picture • 101
viewing picture • 105

CB (Cell Broadcast) messages • 90

Cell ID, display • 147

Characters, enter • 45

Charging battery • 20

Closed User Group (CUG) • 144

Conference call • 56

Connect tone • 113

Contacts

copying • 36
deleting • 36, 42
editing • 35
options • 35
searching/dialling • 37
speed-dialling • 40
storing • 32

Cost, calls • 100

Currency exchange • 137

D

Date, set • 129

Deleting

calendar memo • 129
call record • 98
contacts • 36
MMS postcard • 86
multimedia message • 74, 76
photo • 106
task • 134

text message • 81, 82
video • 108
voice memo • 136
Delivery reports, message • 94
Dialled calls • 97
Display
 backlight • 15
 external • 16
 icons • 14
 layout • 13
 settings • 115
Diverting, calls • 138
DTMF tones, send • 54

E

Earpiece volume • 25
Emergency calls • 175
EMS (Enhanced Message Service) • 78
Error tone • 113
External display • 16, 117

F

FDN (Fixed Dial Number)
 mode • 122
Flashlight • 17
Folder tone • 112
Forward, multimedia
 message • 74
Front LCD • 16, 117

G

Games • 158
Graphic logo • 117
Greeting message • 118

H

Health and safety • 167
Holding, call • 51

I

Icons, description • 14
Images, downloaded • 155
Inbox, messages
 multimedia • 72
 text • 81
Infrared, connect • 114
International calls • 23

J

Java service • 151

K

Keypad tones
 selecting • 110
 sending • 54
Keys
 description • 11
 location • 10
 shortcut • 124
Key volume • 25

L

Language, select • 119
Last number, redial • 24
Locking
 media contents • 121
 phone • 120
 SIM card • 122
Low battery indicator • 21

M

Memory status
 camera • 108
 contacts • 43
 downloaded items • 156
 multimedia messages • 91
 text messages • 91
 voice memos • 137
Menus
 access • 59
 list • 61

Messages
 cell broadcast • 90
 greeting • 118
 multimedia • 67
 text • 78
 voice • 89
 web • 158
 Message tone • 111
 MIDlets, launch • 151
 Minute minder • 113
 Missed calls • 27, 96
 MMS (Multimedia messages Service) • 67
 MMS postcard • 84
 Morning call • 125
 Multimedia messages
 creating/sending • 68
 deleting • 74, 76
 editing • 76
 reading • 72, 75
 setting • 69
 Multi-party calls • 56
 Muting
 all sounds • 29
 key tones • 54
 microphone • 53
 My stuff • 151

N

Names
 entering • 45
 searching/dialling • 37
 Network selection • 143
 Network services • 138
 Numbers, phone
 searching/dialling • 37

O

On/off switch, phone • 22
 Organiser • 125
 Outbox, messages
 MMS postcard • 86
 multimedia • 75
 text • 82
 Own number • 118

P

Password
 call barring • 141, 166
 phone • 121, 163
 Phone
 care and maintenance • 177
 display • 13
 icons • 14
 keys • 11
 layout • 10
 locking • 120
 password • 163
 resetting • 124
 switching on/off • 22
 unpacking • 9
 Photo
 deleting • 106
 taking • 101
 viewing • 105
 PIN
 changing • 120
 description • 164
 PIN2
 changing • 122
 description • 165
 Power on/off tone • 112
 Privacy • 121
 Problems, solve • 160
 PUK • 164
 PUK2 • 165

R

Radio-frequency • 167
 Received calls • 97
 Received messages
 multimedia • 72
 text • 81
 Redialling
 automatically • 123
 manually • 24
 Resetting phone • 124
 Ring tone • 109
 Ring type • 110
 Ring volume • 110
 Road safety • 170
 Roaming • 143

S

Safety
 information • 167
 precautions • 7
 Scheduler • 127
 SDN (Service Dialling Numbers) • 44
 Searching, contacts • 37
 Security, calls • 119
 Sent messages
 MMS postcard • 86
 multimedia • 75
 text • 82
 Service light • 16, 116
 Shortcut, keys • 124
 Silent mode • 29
 SIM card
 installing • 18
 locking • 122
 SMS (Short Message Service)
 Inbox • 81
 Outbox • 82
 Soft keys • 30
 Sounds, downloaded • 154
 Sounds settings • 109
 Speed-dial • 40
 Switch on/off
 microphone • 53
 phone • 22
 Symbol, text input • 48

T

Tasks, to do list
 creating • 132
 editing • 132
 Templates
 multimedia • 77
 text • 83
 Text, enter • 45
 Text input mode • 46
 Text message
 creating/sending • 78
 deleting • 81, 82, 88
 reading • 81, 82
 sending • 78
 setting • 93
 Time, set • 129

Time format • 130
 To do list • 132
 Tone
 connect • 113
 error • 113
 folder • 112
 keypad • 110
 message • 111
 minute minder • 113
 power on/off • 112
 ring • 109
 Travel adapter • 20

U

User group • 144

V

Vibration • 110
 Video
 deleting • 108
 playing • 107
 recording • 106
 Voice mail • 89
 Voicemail server • 89
 Voice memo
 deleting • 136
 playing • 136
 recording • 135
 Volume, adjust
 earpiece • 25
 keypad tone • 25
 ring • 110

W

Waiting call • 56, 142
 Wallpaper • 115
 WAP browser
 cache, clear • 158
 favourites • 157
 home, access • 147
 World time • 130
 Writing messages
 MMS postcard • 84
 multimedia • 68
 text • 78



Access the Menu Functions	① Press the Centre key.
	② Scroll using the Up and Down keys through the list of the menus until you reach the menu you want.
	③ Press the Centre key or Select soft key.
	④ Scroll using the Up and Down keys through the list of the options until the one you want is selected.
	⑤ Press the Centre key or Select soft key.
Each of the two soft keys ( and ) perform the function indicated by the text above it, on the bottom line of the display.	

Dual Band SGH-E710 GPRS Telephone
Quick Reference Card

Switch On/Off	Press and hold the  key.
Make a Call	① Enter the number. ② Press the  key.
End a Call	Briefly press the  key.
View Missed Calls Shortly After Missing Them	① Open the phone and press the Centre key or View soft key. ② Scroll using the Up and Down keys through the missed calls. ③ To return the call, press the  key.
Answer a Call	Open the phone or press the  key.
Adjust the Volume	Press the  or  key on the left side of the phone.

Declaration of Conformity (R&TTE)

For the following product :

GSM900/GSM1800 Dualband Digital

Portable Cellular Telephone

(Product name)

SGH-E710

(Model Number)

Manufactured at :

- Samsung Electronics Co., Ltd, 94-1, Imsoo-Dong, Gumi City, Kyung-Buk, Korea,
730-350

(factory name, address)

to which this declaration relates, is in conformity with the following standards and/or other normative documents.

Safety : EN 60950:2000

EMC : EN 301 489-01 v1.4.1 (2002-08)

EN 301 489-07 v1.2.1 (2002-08)

SAR : EN 50360:2001

Network : EN 301 511 v9.0.2 (2003-03)

We hereby declare that [all essential radio test suites have been carried out and that] the above named product is in conformity to all the essential requirements of Directive 1999/5/EC.

The conformity assessment procedure referred to in Article 10 and detailed in Annex[N] of Directive 1999/5/EC has been followed with the involvement of the following Notified Body(ies):

BABT, Claremont House, 34 Molesey Road,
Walton-on-Thames, KT12 4RQ, UK
Identification mark: 168

CE 0168

The technical documentation kept at :

Samsung Electronics Euro QA Lab.

which will be made available upon request.
(Representative in the EU)

Samsung Electronics Euro QA Lab.
Blackbushe Business Park, Saxony Way,
Yateley, Hampshire, GU46 6GG, UK

2003.11.26

(place and date of issue)

인석

In-Seop Lee / S. Manager

(name and signature of authorized person)

*It is the address of the Samsung Service Centre. For the address or the phone number of the Samsung Service Centre, see the warranty card or contact the retailer where you purchased your phone.

Choose the Alert Type	- Select the Alert type menu. - Select an option : • Light only • Melody • Vibration • Vibra+melody - Press the Centre key or Select soft key.	Search for a Number in Contacts	- Press the Contacts soft key. - Select the Search option. - Enter the first few letters of the name. - To scroll through the names, press the Up or Down key. - Press the Centre key or View soft key. - To scroll through the numbers, press the Up or Down key. - Press the  key to dial.
Store Numbers in Contacts	- Enter the number and press the Centre key or Save soft key. - Select an icon. - Press the Centre key or Select soft key. - Select a memory. - Press the Centre key or Select soft key. - Enter a name. - Press the Centre key or Ok soft key. - If necessary, change the location number. - Press the Centre key or Ok soft key. - Press the  key to return to Idle mode.	Take a Photo	• With the folder open - Press and hold the Camera key. - Press the Centre or Camera key. - Press the Centre key or Save soft key. • With the folder closed - Press the Camera key. - Press the Camera key.